

Top 100  
Global  
Innovator  
for 10 years

**Susol** *Super Solution*

# Vacuum Circuit Breakers



**LS** ELECTRIC

**Susol** Super Solution

# VCB

## Vacuum Circuit Breakers





# **Susol**

## **Vacuum Circuit Breakers**



Susol VCB is full line-up new VCB which has the high interrupting capacity, large current(~50kA, ~4000A), and maximized compatibility with existing products through the dual phases and compact sized models.

### **Contents**

---

External structure	26
Basic features and interrupting operation	28
Standards and certification	31
Types and ordering information	32
Type of circuit breakers	42
Ratings	46
Accessories	59
Control circuit diagrams	93
Dimensions	97
Side-Mount type VCB	257
Technical data	259

---

# **Susol VCB**

Vacuum Circuit Breaker, VCB is installed in the medium voltage distribution lines to protect life and load equipment. In case of accidents such as over current, short circuit and ground fault current, VCB works by interrupting the circuit through the inner Vacuum Interrupter which is acted by signal from the outside separate relay.

LS ELECTRIC's Super Solution, Susol VCB responds.

- customer needs for the breakers with high interrupting capacity and large current due to the integration and increase of the load capacity.
- worldwide trend of diversification in the medium voltage distribution lines.
- increase of the reliability for the temperature characteristics of circuit breakers.

Premium-type products to improve convenience and reliability of medium voltage switchgear configuration.

- full line-up modeling to the high interrupting capacity and large current.
- main structure with high reliability application.
- a variety of accessories and ability to maximize.

Suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships.



- ▶ Strengthening of the high interrupting capacity and large current models and full line-up new VCB models to high/middle/low.

Voltage	Interrupting current	Rated current
7.2kV	8/12.5/20/25/31.5/40/50kA	400/630/1250/2000/3150/4000A
12kV	20/25/31.5/40/50kA	630/1000/1250/2000/2500/3150/4000/5000
17.5kV	20/25/31.5/40/50kA	630/1000/1250/2000/2500/3150/4000A
24kV	12.5/25/31.5/40kA	630/1250/2000/2500/3150A
25.8kV	12.5/16/25/31.5/40kA	630/1250/2000/3150A
36kV	25/31.5/40kA	1250/2000/3150A

- ▶ Main circuit structure with high reliability.
  - Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor).
  - Strong structure for the temperature rise (Natural cooling system).
- ▶ Convenience of switchgear configuration and a variety of accessories.
  - CB compartment structure: Metal isolation structures to prevent the accident spread and ensure safety. And the convenience of switchgear building is extended by its module style.
  - A variety of accessories: UVT, Locking Magnet, Plug Interlock, Key lock, Temperature Sensor, MOC, TOC, Earthing S/W.
  - Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.





## Susol VCB Family

Susol VCB series are premium-type products featuring main structure with high reliability application and a variety of accessories and ability to maximize to be suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships

### 7.2kV (VL-06)

- Rated short time (for withstand current ): 3sec.
- Rated operating sequence: O-0.3s-CO-15s-CO
- Type test level: M2, E2 (List1), C2
- 100% Compatibility
  - with existing fixed type breakers
  - with existing drawout type breakers
- Various cradle: E, F and G type
- A variety of control power
  - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
  - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
  - Charge switch, UVT, Secondary trip Coil, Current trip coil, Position S/W
  - Key-lock, Button lock, Button cover, Padlock, UVT, Time Delay Controller, CTD
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
  - IEC62271-100 (2012) [M2, C2, E2 (List1)]
  - Tested in enclosure
  - KERI type tested, V-check (KESCO) certification



Ur (kV)	Isc (kA)	Ir (A)
7.2	8	400
	12.5	630

### Full line-up & Compact

Full line-up new VCB models to the high interrupting capacity and large current (~ 50kA, ~ 5000A) featuring maximization of compatibility with existing products through the dualistic deployment of phases and compact models



**7.2/12/17.5/24/25.8/36kV (VL-06/12/17/20/25/36)**

- Rated short-time (to withstand current): 3sec. 4sec \*
- Rated operating sequence: O-0.3s-CO-15s-CO
- Type test level: M2, E2 (List3), C2
- Compatibility with existing Pro-MEC breakers
- Various cradle: E, F, G, Fs, Gs and H type
- CB Compartment for MCSG available
- A variety of control power
  - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
  - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
  - VCB part: Charge switch, UVT, Secondary trip coil, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
  - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & Accessories, Door, Door interlock, Door emergency button
  - Others: Racking in/out handle, UVT Time delay controller, CTD (Condensor Trip Device), Temperature module
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
  - IEC62271-100 (2012) [M2, C2, E2 (List3)]
  - KEMA, KERI type tested, V-check (KESCO) certification

Note ) \* Please contact us



Ur (kV)	Isc (kA)	Ir (A)
7.2	20	630 1250 2000
	25	630 1250 2000
	31.5	630 1250 2000
	12	630 1000 1250 2000
	25	630 1000 1250 2000
	31.5	630 1250 2000 2500
	17.5	630 1250 2000
	20	630 1250 2000
	25	630 1250 2000
	31.5	630 1250 2000 2500
	24, 25.8	12.5 16 25 36
	25	630 1250 2000 2500

**7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)**

- Rated short-time (to withstand current): 3sec. 4sec \*
- Rated operating sequence: O-0.3s-CO-15s-CO, (O-0.3s-CO-3min-CO \*\*)
- Type test level: M2, E2 (List3), C2
- Electrical and mechanical life: 20,000 operations
- Various cradle: K, Fs, Gs and H type
- CB Compartment for MCSG available
- A variety of control power
  - DC 48V, DC 110V, DC 125V, DC 220V
  - AC 48V, AC 110V, AC 220V
- A variety of accessories
  - VCB part: UVT, Secondary trip coil, Latch checking switch, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
  - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & Accessories, Door, Door interlock, Door emergency button
  - Others: Racking in/out handle, Lifting hook, UVT Time delay controller, CTD (Condensor Trip Device), Temperature module
- Anti Pumping Device
- Standards and certification
  - IEC62271-100 (2012) [M2, C2, E2 (List3)]
  - KEMA, KERI type tested, V-check (KESCO) certification

Note ) \* Please contact us

\*\* Please refer to ratings


Ur (kV)	Isc (kA)	Ir (A)
7.2	31.5	1250
	12	2000 3150
	40	1250 2000 3150 4000
	50	1250 2000 2500 3150 4000
	17.5	31.5 1250 2000 3150
	20	2000 3150 4000
	50	1250 2000 2500 3150
	24	2500 31.5 1250 2000 3150
	25.8	2500 31.5 1250 2000 3150
	40	1250 2000 3150
	36	25 1250 2000 3150 31.5 1250 2000 3150 40 1250 2000 3150



VCB Cradle type



Main circuit structure  
with high reliability

# Susol VCB

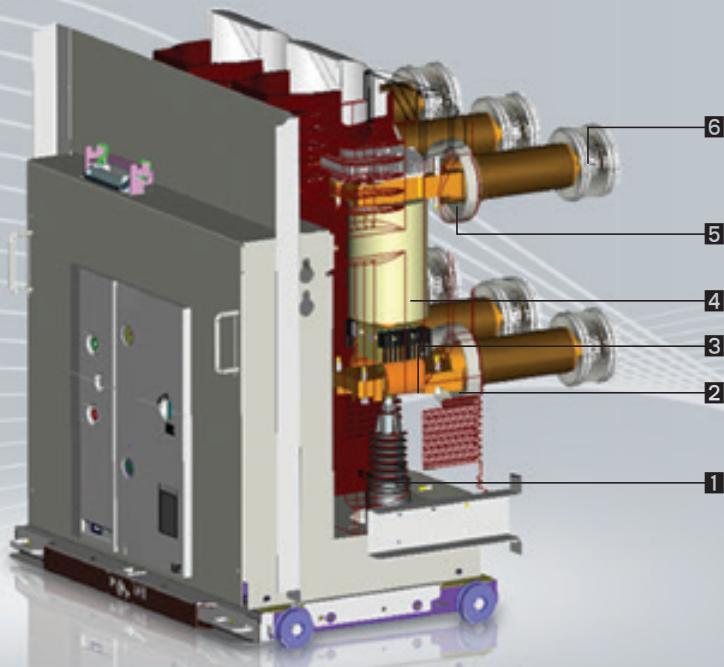

## Breaker

- 1 Insulation rod
- 2 Lower terminal
- 3 Shunt
- 4 Vacuum interrupter
- 5 Upper terminal
- 6 Tulip contactor

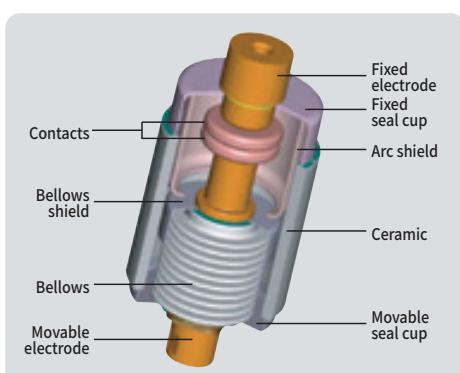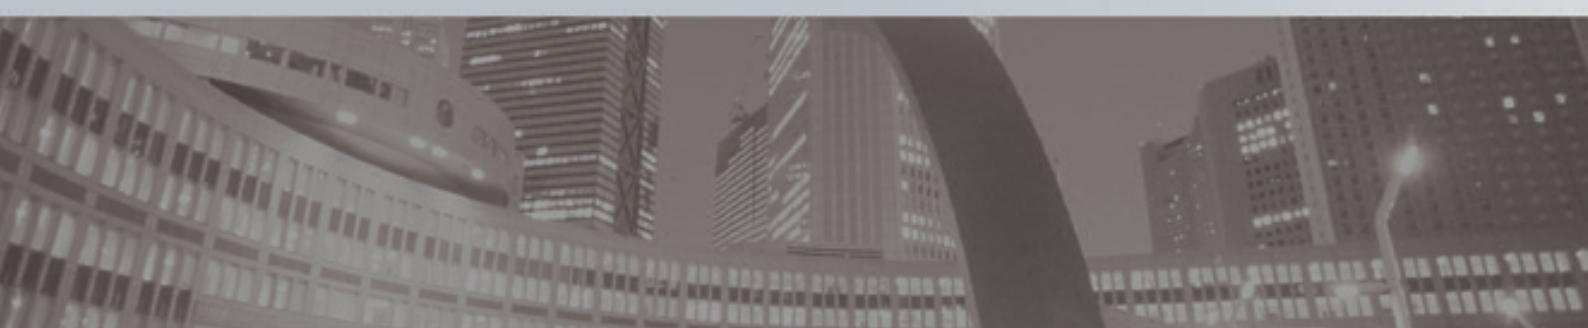

## Vacuum Interrupter, VI

The vacuum rate within the VI is very high (approximately  $5 \times 10^{-5}$  Torr) and the spacing between fixed contact and movable contact is about 6~20mm, depending on the voltage.

The contacts are in a structure that arc can easily be extinguished and the surfaces of the contacts are made of

special alloy (copper-chromium) and the interior is completely sealed to prevent loss of vacuum.

Therefore the wearing of the contacts can be minimized in the event of short-circuit and the arc energy by overvoltage or switching can be reduced effectively.

## Convenience and Variety


- Maximizing the durability and reliability of the main circuit contactors  
(Stego Tulip contactor)
- Strong structure for the temperature rise  
(Natural cooling system)



# Stego Tulip

## Main circuit structure with high reliability

- Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor)
- Strong structure for the temperature rise (Natural cooling system)

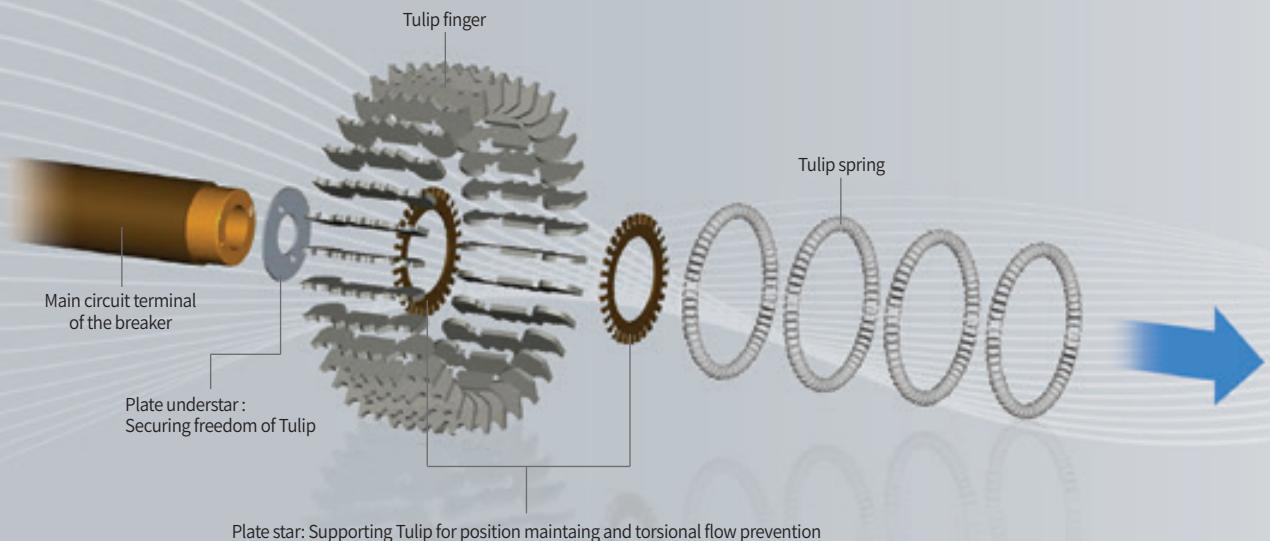

## Structure of Stego Tulip Terminal

- Maintaining the connection between breaker and cradle for the optimum current path through securing freedom of Tulip.
- Increasing the heat dissipation area of the contactors and minimizing aging.





### Major supply records

- S Electro-Mechanics, Busan plant: 12kV 40kA 4000A VCB
- P Combined cogeneration power plant: 7.2kV 50kA 4000A VCB
- K Petrochemical, Ulsan plant: 7.2kV 40kA 4000A VCB
- P Steel plant, Gwangyang: 7.2kV 50kA 4000A VCB
- P Steel plant, Pohang: 7.2kV 50kA 4000A VCB
- L Chem, Cheongju plant: 7.2kV 40kA 4000A VCB
- S Electronics, Tangjeong plant: 7.2kV 40kA 4000A VCB

## 7.2/12/17.5/24/25.8/36kV... (VH-06/12/17/20/25/36)

- Drawout / natural cooling system
- Improved temperature characteristics and ensured high reliability

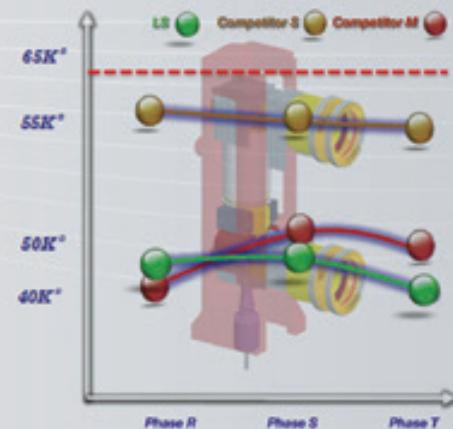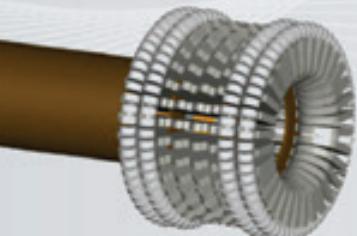

VL type Tulip contactor



VH type Tulip contactor



36kV Tulip contactor

# CB Compartment

Convenience in building switchgears


- CB compartment structure: H type cradle
- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of switchgear building



7.2/12/17.5/24/25.8/36kV 20/25/31.5/40/50kA

- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of operation by Truck
  - Drawable in the closed position of the switchgear door
  - Racking-in/out positions indicated mechanically
- Equipped with safety devices and accessories
  - Control power connected Interlock
  - Earthing S/W and interlock, MOC/TOC (ANSI)
- Convenience in building switchgears
  - Module assembly with CB compartment



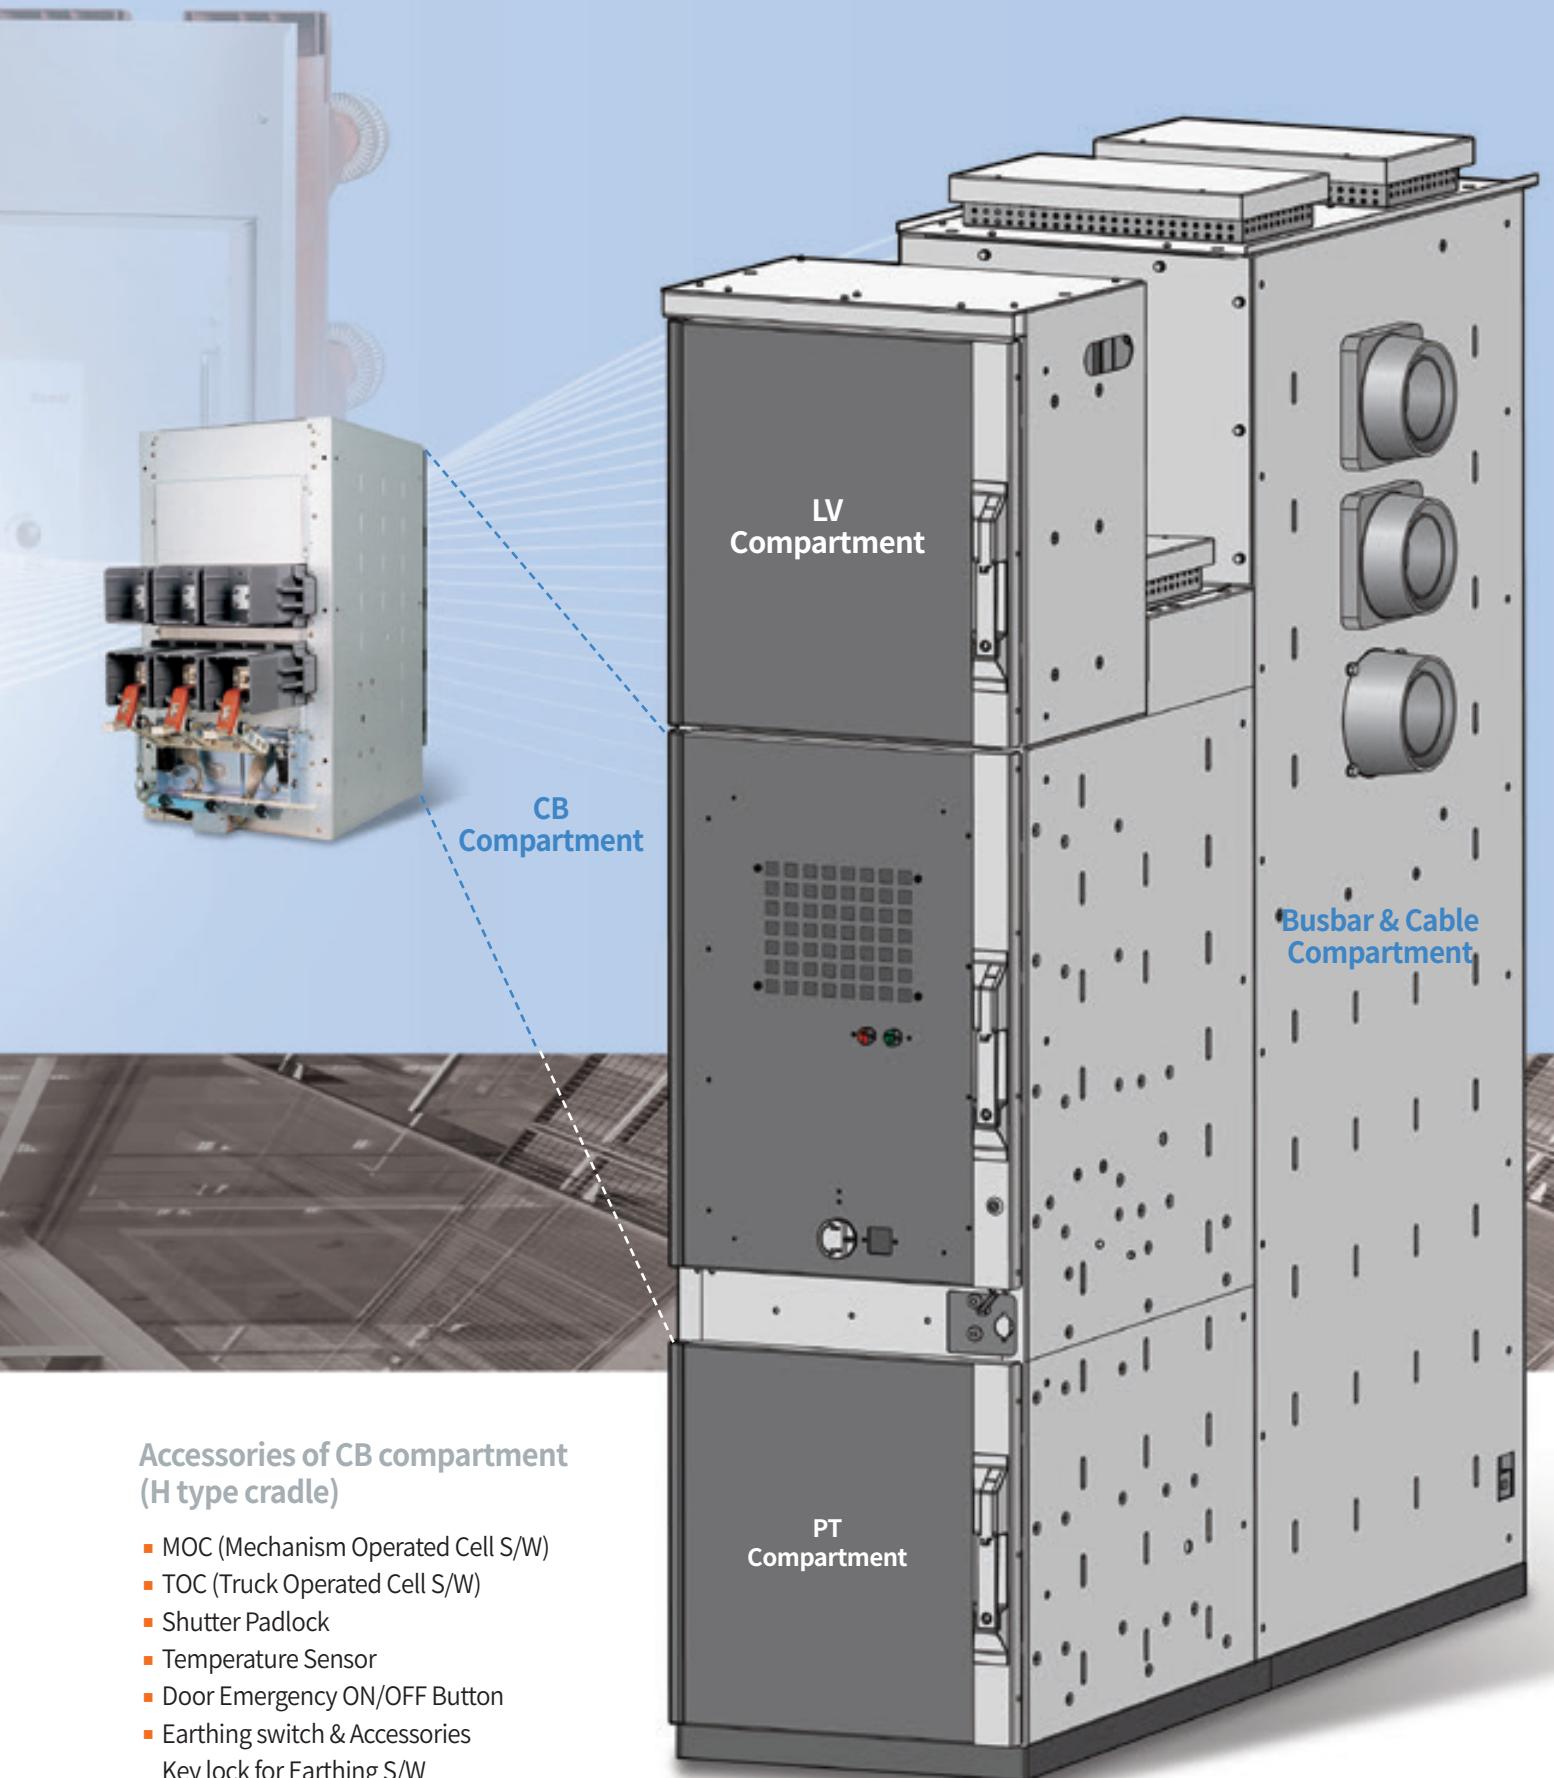

#### Accessories of CB compartment (H type cradle)

- MOC (Mechanism Operated Cell S/W)
- TOC (Truck Operated Cell S/W)
- Shutter Padlock
- Temperature Sensor
- Door Emergency ON/OFF Button
- Earthing switch & Accessories
- Key lock for Earthing S/W
- Locking Magnet for Earthing S/W
- Position S/W for Earthing S/W
- TM (Temperature Monitoring Unit)

# Cradles

E, F, G, K and H type... Variety of the Cradles

**F type**

**E type**

**E type**

- Economic style cradle with the basic structure
- No safety shutter and bushing
- For MESG
- Applies VL type VCB

**F type**

- Safety shutter has been added to the cradle of type E
- No bushing
- For MESG
- Applies VL type VCB




E type



F type



H type

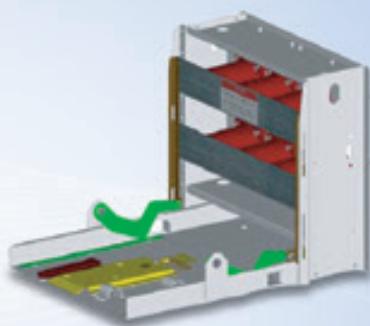**G type****G type**

- Premium style cradle with safety shutter and bushings
- For MESG
- Applies VL type VCB

**K type****K type**

- Premium style cradle with metal safety shutter and bushings
- Metal isolated structure: To prevent spreading accident and secure safety
- More convenient by withdrawable Truck
- For MCSG
- Applied to medium capacity/high capacity VCB

**H type****H type**

- Metal isolation structure to prevent the accident spread and ensure safety
- Convenience of operation by Truck
  - Drawable in the closed position of the switchgear door
  - Racking-in/out positions indicated mechanically
  - Control power connected Interlock
- Convenience in building switchgears
  - Module assembly with CB compartment
  - Assembly with CT/PT integrated compartment
- Applies VL/VH type VCB
- Ha type
  - Height-reduction of a cradle suitable for two-high breaker arrangements of MCSG



Ha type



Hb type



VH type


# Convenience

## Convenience in building switchgears


- Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.

### VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	20/25	630
	31.5	1000
		1250
17.5	20/25	630
	31.5	1250

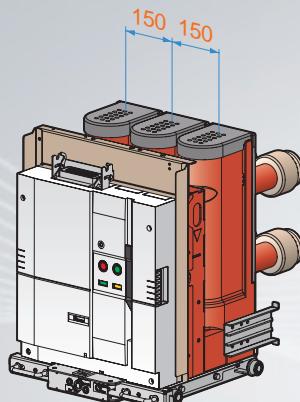


P150  
(distance between phases: 150mm)

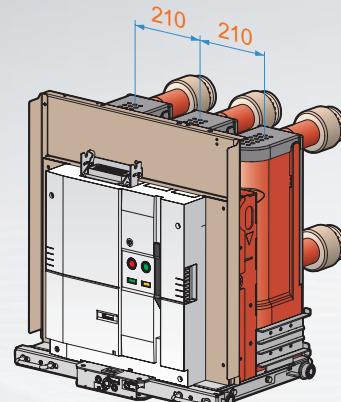


P210  
(distance between phases: 210mm)

### VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	20/25	2000
17.5	20/25	2000

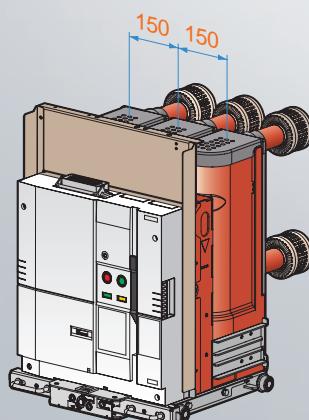


P150  
(distance between phases: 150mm)

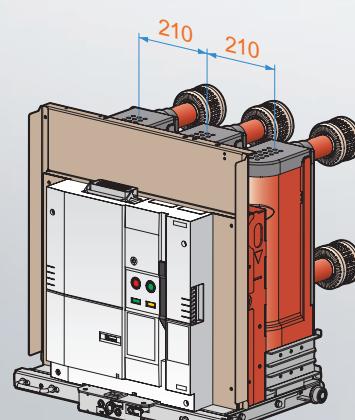

P210  
(distance between phases: 210mm)

### VCB rating

Ur (kV)	Isc (kA)	Ir (A)
12	31.5	2500
	17.5	


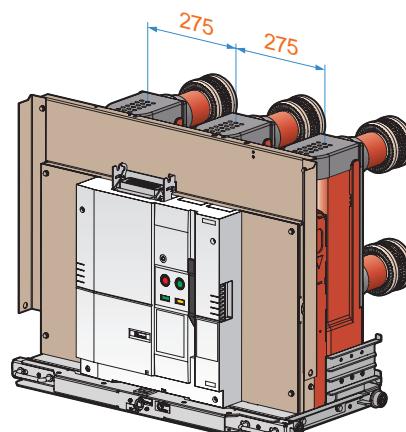


P275  
(distance between phases: 275mm)



**VCB rating**

Ur (kV)	Isc (kA)	Ir (A)
24	12.5	630 1250
	16/25	630 1250
	25	2000 2500 *
25.8	12.5	630 1250
	16/25	630 1250
	25	2000 2500 *

\* 2500A: phases distance 275mm only

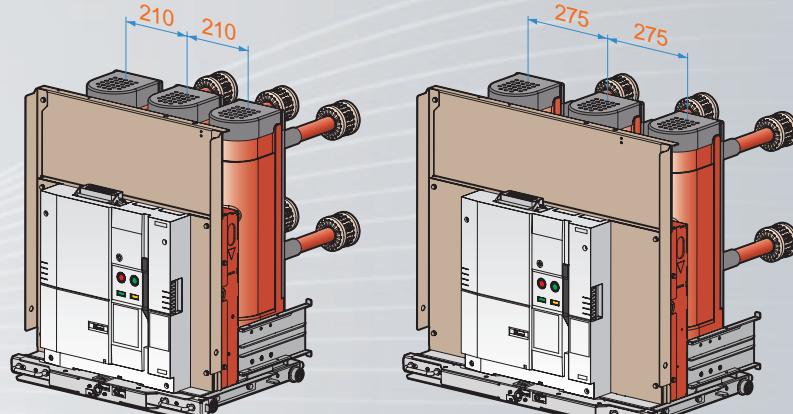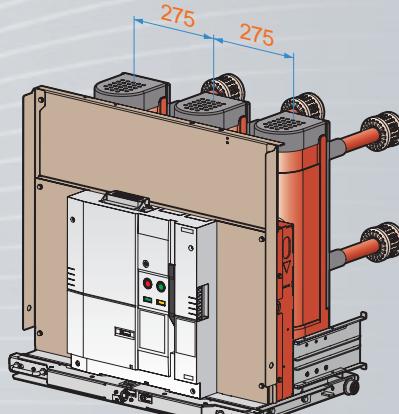
P210  
(distance between phases: 210mm)P275  
(distance between phases: 275mm)**VCB rating**

Ur (kV)	Isc (kA)	Ir (A)
24	31.5/40	2000
25.8	31.5/40	2000

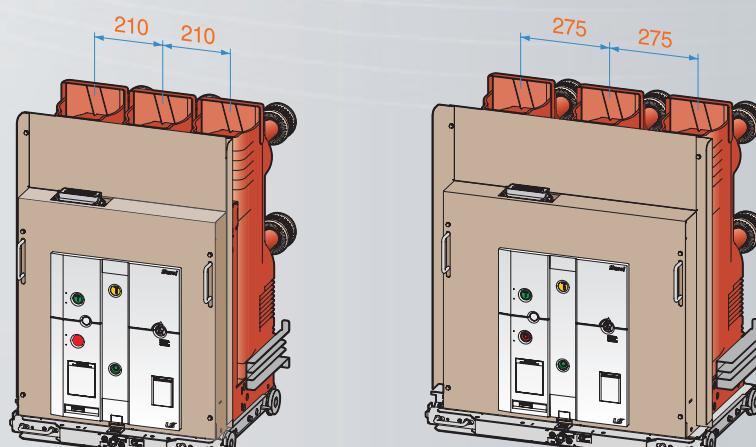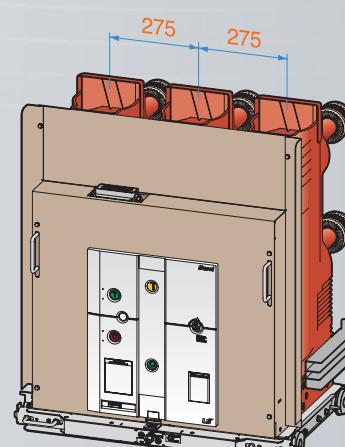
P210  
(distance between phases: 210mm)P275  
(distance between phases: 275mm)**Function to locking a breaker during transport of a switchgear**

- Fixed bracket must be dismantled first to rack in a breaker - interlocking system


Fix bracket easily visible from the front of the breaker



VL type VCB (VL-06)  
(E/F/G type)

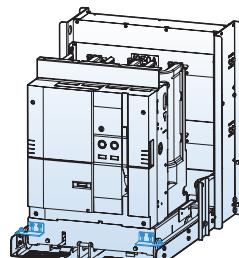

VL type VCB (VL-06/12/17)  
(E/F/G type)

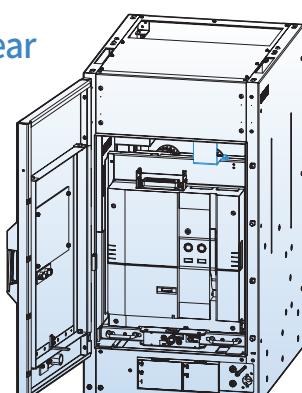


VL/VH type VCB  
(H type CB compartment)

# Accessories

## A variety of accessories for VL-06

If accessories are attached to the breaker, the function of the breaker is upgraded.

Susol VCB provides a variety of accessories depending on the purpose.

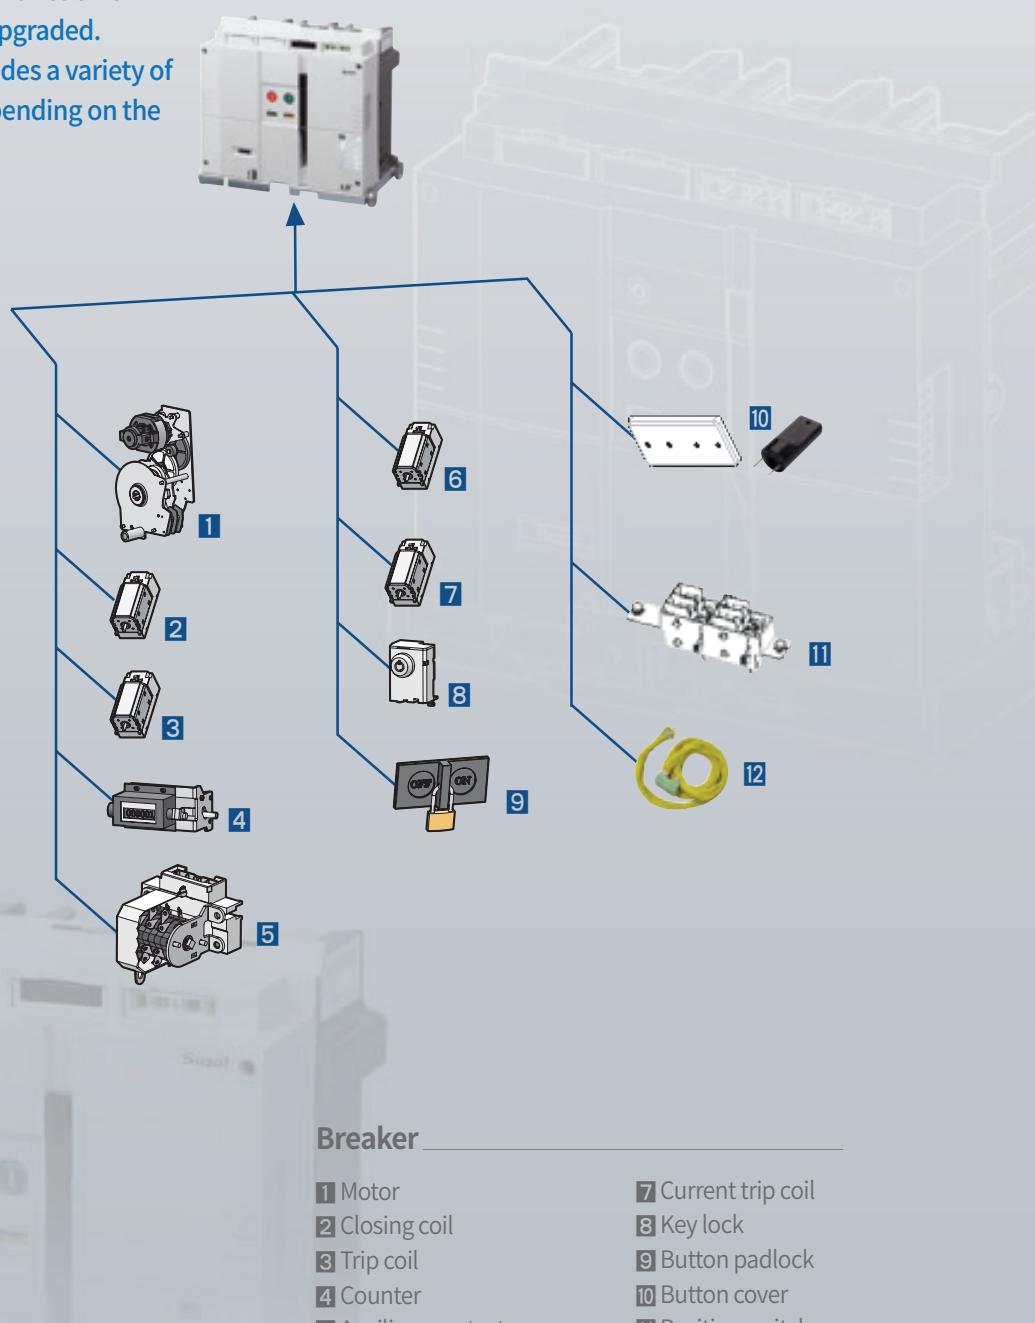


### Breaker

- 1 Motor
- 2 Closing coil
- 3 Trip coil
- 4 Counter
- 5 Auxiliary contacts
- 6 UVT coil

- 7 Current trip coil
- 8 Key lock
- 9 Button padlock
- 10 Button cover
- 11 Position switch
- 12 Lead wire

## A variety of accessories for VCL-06

If accessories are attached to the cradle, the function of the breaker is upgraded. Susol VCB provides a variety of accessories depending on the purpose.

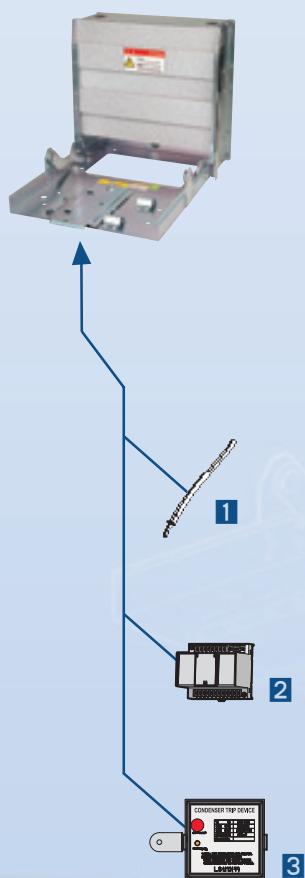


### Cradle

- 1 Handle for Racking-in and out
- 2 UVT time delay controller
- 3 Condenser trip device

# Accessories

A variety of accessories for VL-06/12/17/20/25/36

If accessories are attached to the breaker, the function of the breaker is upgraded. Susol VCB provides a variety of accessories depending on the purpose.

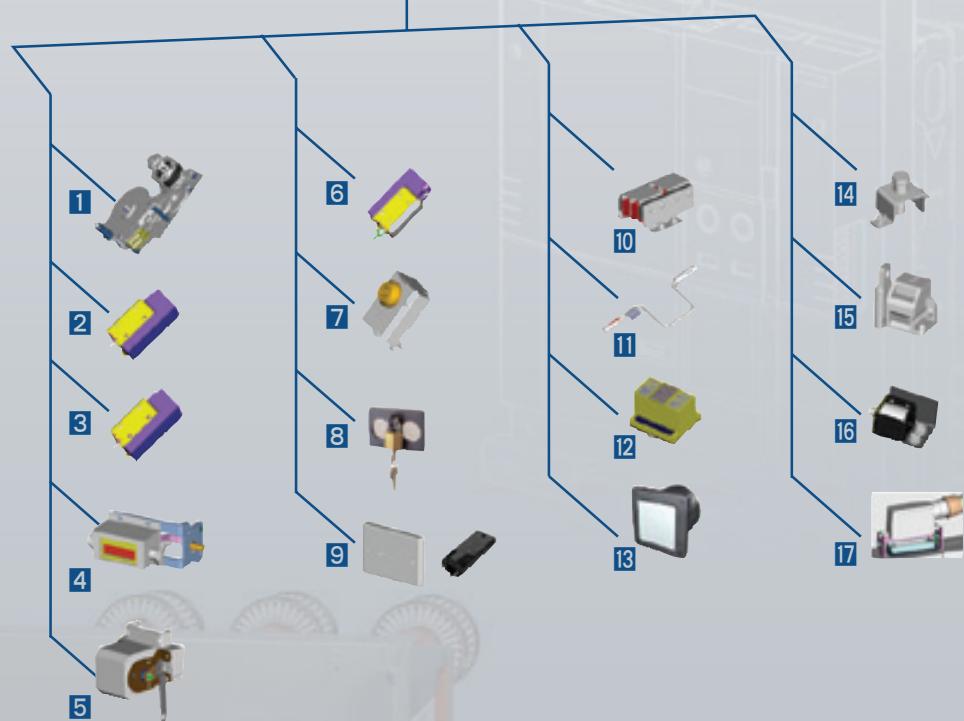


## Breaker

- 1 Motor
- 2 Closing coil
- 3 Trip coil
- 4 Counter
- 5 Auxiliary contacts
- 6 UVT coil
- 7 Key lock
- 8 Button padlock
- 9 Button cover

- 10 Position switch
- 11 Handle for Racking-in/out
- 12 UVT time delay controller
- 13 CTD (Condenser trip device)
- 14 MOC (Mechanism operated cell switch)
- 15 Padlock (H type Door Interlock)
- 16 Locking magnet
- 17 Plug Interlock

## A variety of accessories for VL-06/12/17/20/25/36

If accessories are attached to the cradle, the function of the breaker is upgraded. Susol VCB provides a variety of accessories depending on the purpose.

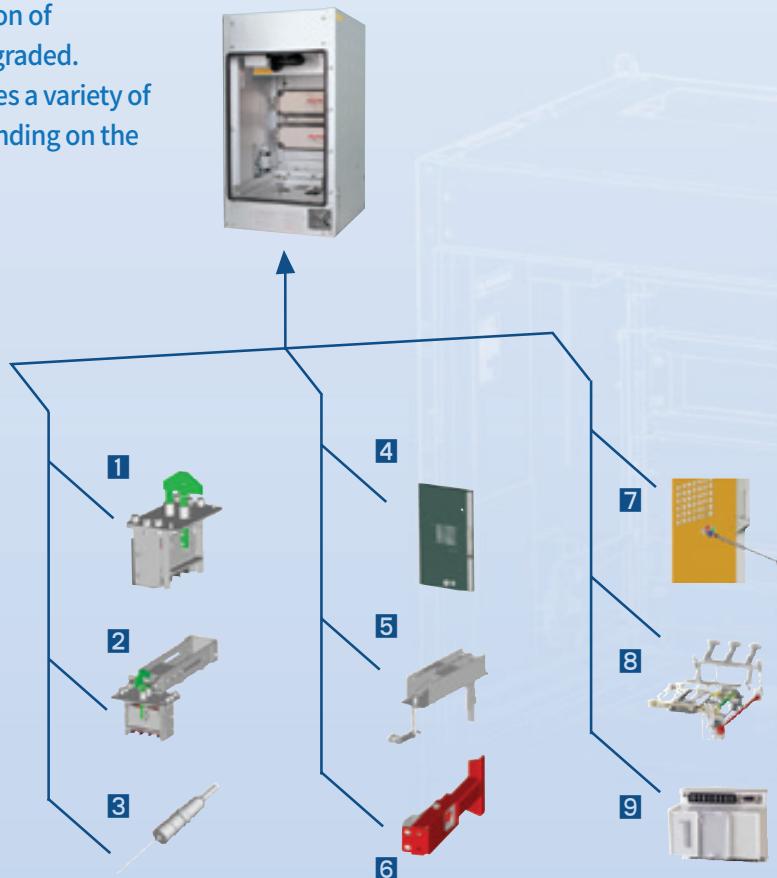

### Cradle (H type)

- |   |   |
|---|---|
| <b>1 TOC (Truck operated cell s/w)</b>      | <b>7 Emergency ON/OFF button</b>              |
| <b>2 MOC (Mechanical operated cell s/w)</b> | <b>8 Earthing switch &amp; Accessory</b>      |
| <b>3 Temperature sensor</b>                 | <b>8.1 Key lock for Earthing switch</b>       |
| <b>4 Door</b>                               | <b>8.2 Locking Magnet for Earthing switch</b> |
| <b>5 Door interlock</b>                     | <b>8.3 Position s/w for Earthing switch</b>   |
| <b>6 Shutter padlock</b>                    | <b>9 TM (Temperature monitoring unit)</b>     |

# Accessories

A variety of accessories for VH-06/12/17/20/25/36

If accessories are attached to the breaker, the function of the breaker is upgraded.  
Susol VCB provides a variety of accessories depending on the purpose.



## Breaker


- 1 Motor
- 2 AC/DC coil rectifier
- 3 Trip coil/Closing coil  
Secondary trip coil
- 4 AC/DC UVT coil rectifier
- 5 UVT coil
- 6 Latch checking switch

- 7 Auxiliary contact wire
- 8 Key lock
- 9 Button cover/Push bar
- 10 Button padlock
- 11 Position switch
- 12 Locking magnet
- 13 Plug interlock

- 14 Door Interlock for withdrawable type
- 15 Lifting hook
- 16 Charge handle
- 17 Racking in/out handle
- 18 UVT Time delay controller
- 19 CTD (Condenser trip device)
- 20 Wireless Temp. monitoring sensor

## A variety of accessories for VH-06/12/17/20/25/36

If accessories are attached to the cradle, the function of the breaker is upgraded. Susol VCB provides a variety of accessories depending on the purpose.

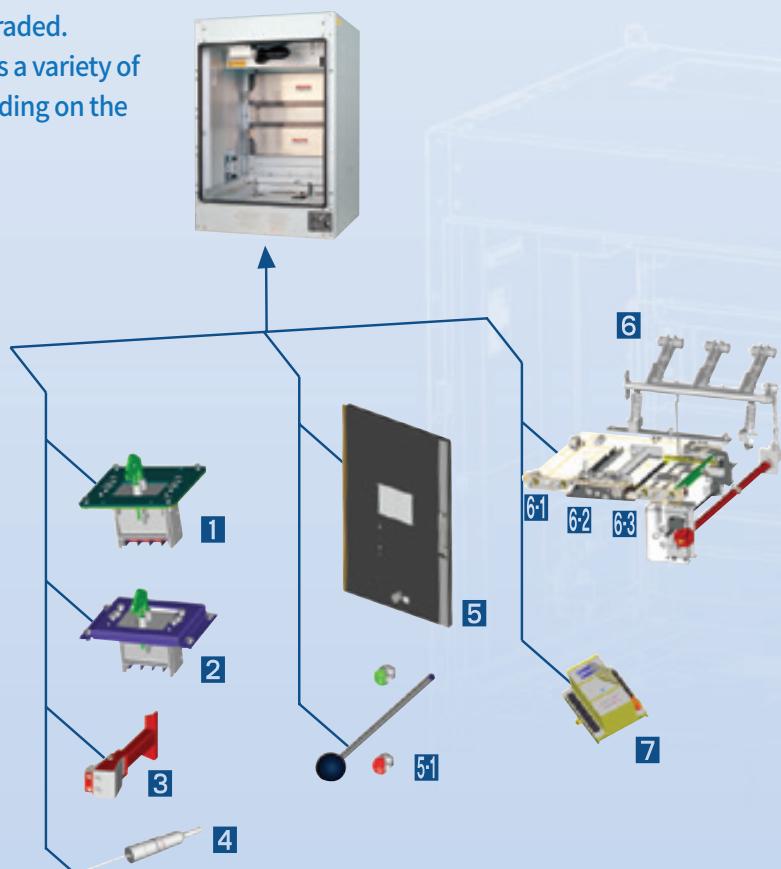

### Cradle (H type)


- |   |  |
|---|--|
| <b>1</b> MOC (Mechanism operated cell switch) | <b>6</b> Earthing switch & Accessories         |
| <b>2</b> TOC (Truck operated cell switch)     | <b>6-1</b> Key lock for Earthing switch        |
| <b>3</b> Shutter padlock                      | <b>6-2</b> Locking magnet for Earthing switch  |
| <b>4</b> Temperature sensor                   | <b>6-3</b> Position switch for Earthing switch |
| <b>5</b> Door                                 |  |
| <b>5-1</b> Emergency ON/OFF button            | <b>7</b> TM (Temperature monitoring unit)      |

# Standards and certifications


## E2 (List 1 or List3)

E2 (List3) is first proposed in the IEC 62271-100(2008) to improve the efficiency of the interrupting test. According to it the number of interrupting test T60 is increased instead of fewer number of T10 and T30 compared to the existing List1. List3 compared with the List1 maintains the equivalent of the test but has severe test conditions because 34% higher arc energy applied to the breaker. List3 is applied to Susol VCB series.


IEC62271-100 (2002)

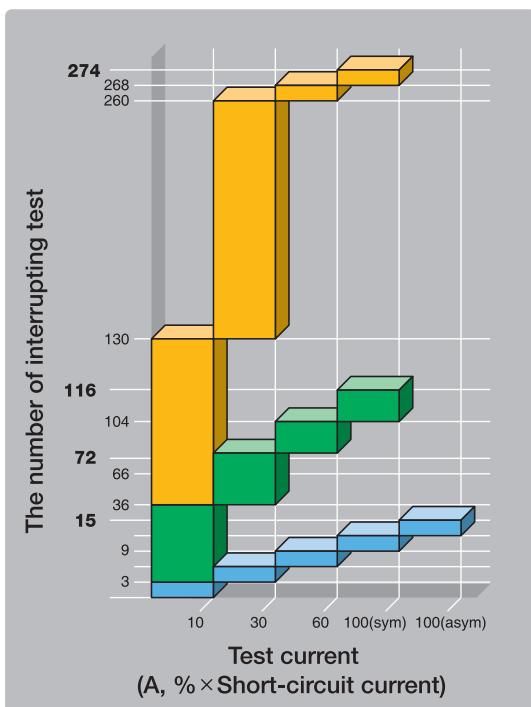

IEC62271-100 (2008)

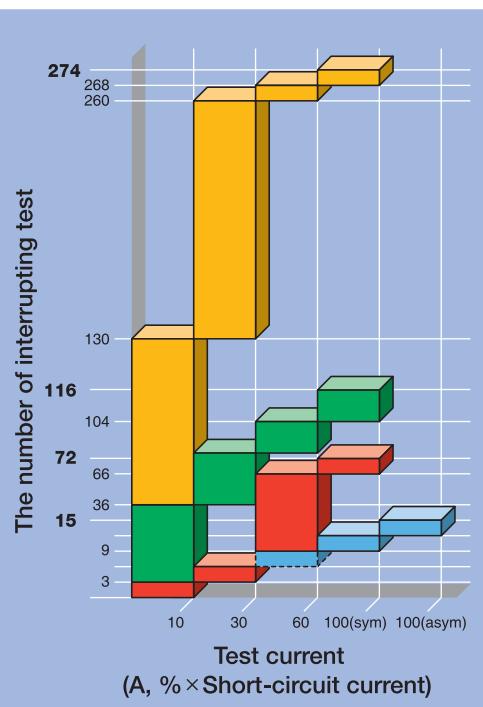

Arc Energy: List 1 (100%) < List 2 (125%) < List 3 (134%)

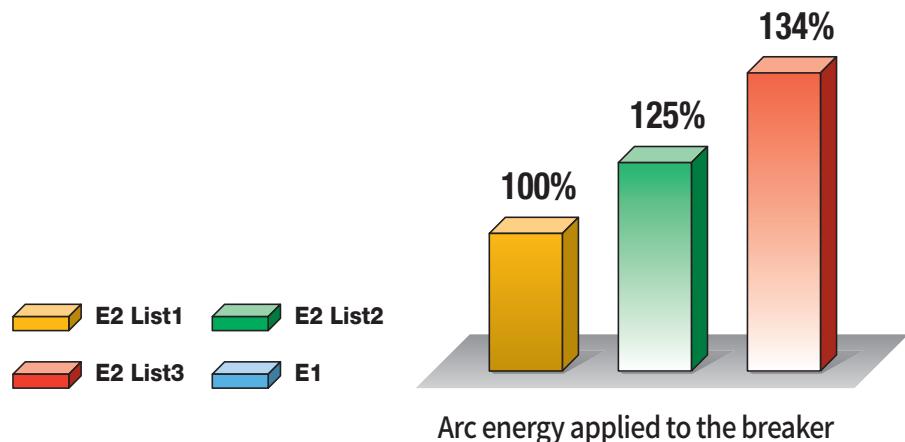

## M2, C2

IEC standards to verify the reliability of the product allows to select the quality level for the product to be tested according to its real performance and practical usage. The highest quality level of M2, C2 has been applied to Susol VCB.

**M1 and M2:** Test to determine the mechanical durability grade

2000 operation test		
Sequence	Control Voltage	Number of operations
C-O	85%	500
C-O	100%	500
C-O	110%	500
O-CO-C	100%	250

**M2**



**M1**



- Pre-test (characteristics, isolation, and temperature)
- Confirmative tests after the completion of 2000 operations (Characteristics, isolation, temperature)
- Pre-test (characteristics, isolation, and temperature)
- Confirmative tests after every 2000 operation
- Confirmative tests after the completion of 10,000 operations (Characteristics, isolation, temperature)

**C1, C2:** Capacitive current breaking test is to verify the probability of restriking and C2 class is secured for all Susol VCB.



2 restrikes are allowed during “O” 24 operations and “CO” 24 operations



Restrike is not allowed during “O” 24 operations and “CO” 24 operations

# External structure of VCB

## Breaker ... VL type



### Name of each part

- ① Push ON Button
- ② Push OFF Button
- ③ Charge/Discharge Indicator
- ④ ON/OFF Indicator
- ⑤ Manual Charging Handle
- ⑥ Key Lock
- ⑦ Operation Counter
- ⑧ TEST/SERVICE Position Indicator

## Back side



## Breaker ... VH type



### Name of each part

- ① Push ON Button
- ② Push OFF Button
- ③ Charge/Discharge Indicator
- ④ ON/OFF Indicator
- ⑤ Manual Charging Handle
- ⑥ Key Lock
- ⑦ Operation Counter
- ⑧ TEST/SERVICE Position Indicator

## Back side



# Basic functions and interrupting operation

## Basic functions

### Manual operation

#### ① Manual Charge

- a) VL type: operate the charge handle 7-8 times as a fully stroke.
- b) VH type: Insert the charge handle into the handle slot first. Rotate the handle clockwise 40 times more and then charge will be complete with a click sound.
  - When the closing spring is charged fully "CHARGED" is displayed at the charge indicator.

#### ② Manual closing

- a) Pressing the ON button the breaker is closed.
- b) With the closing of the breaker "ON" is displayed at Close/Trip indicator and "DISCHARGED" at the charge indicator.

#### ③ Manual trip

- a) Pressing the OFF button the breaker is opened.
- b) "OFF" is displayed at Close/Trip indicator.

### Electric operation

#### ① Electric charge

The breaker is remotely closing with charging of closing spring.  
If the breaker closing the closing spring is automatically charged by gear motors.

#### ② Electric closing

Remote closing is operated by the closing coil.


#### ③ Electric trip

Remote trip can be operated by the trip coil or UVT coil.

Main contacts are operated by the energy of the spring mechanism and closing spring is charged by the motor in the mechanism.

Breaker is closed by closing coil and tripped by trip coil.

These operations are repeated in VCB as shown in the below sequence chart.

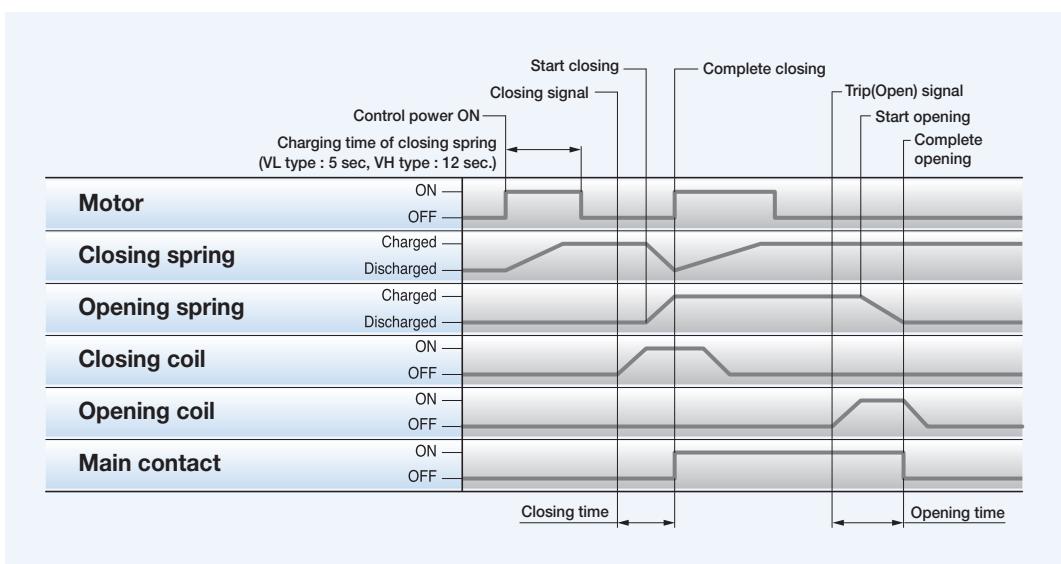



Sequence of the switching mechanism

## The interruption of vacuum interrupters

The interruption of VCB is carried out by the vacuum interrupters.

Interrupter contacts as a key part made of copper - chromium (CuCr) material with spiral shape have low contact wear characteristics and withstand voltage is excellent.


Spiral contacts make the arc generated between the surfaces of contacts rotated around the surface of contact by the induced magnetic field generated due to the spiral contact structure, which results in preventing local heating, thereby corruption and interrupting instantaneously.

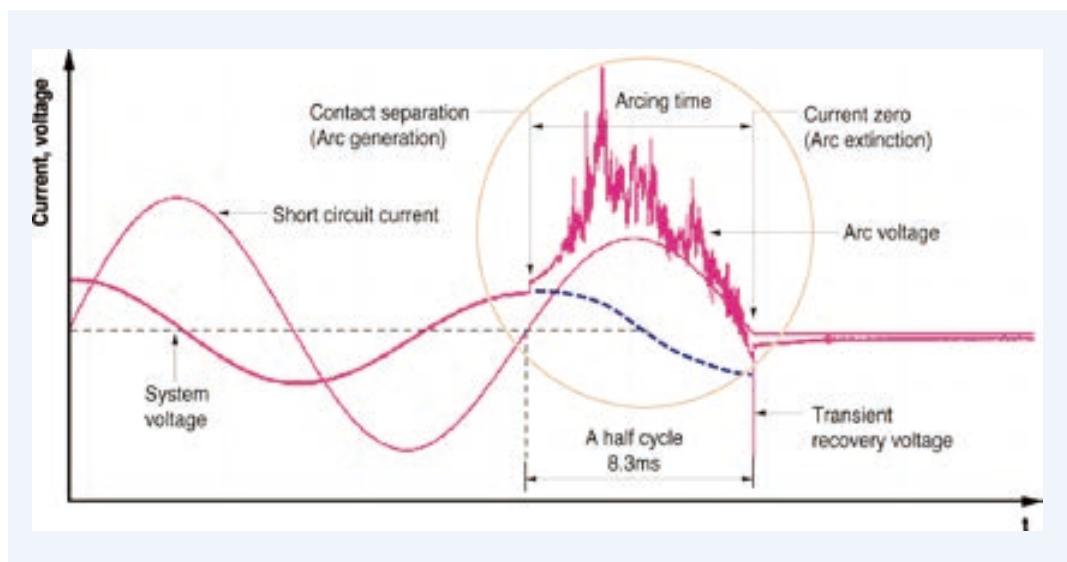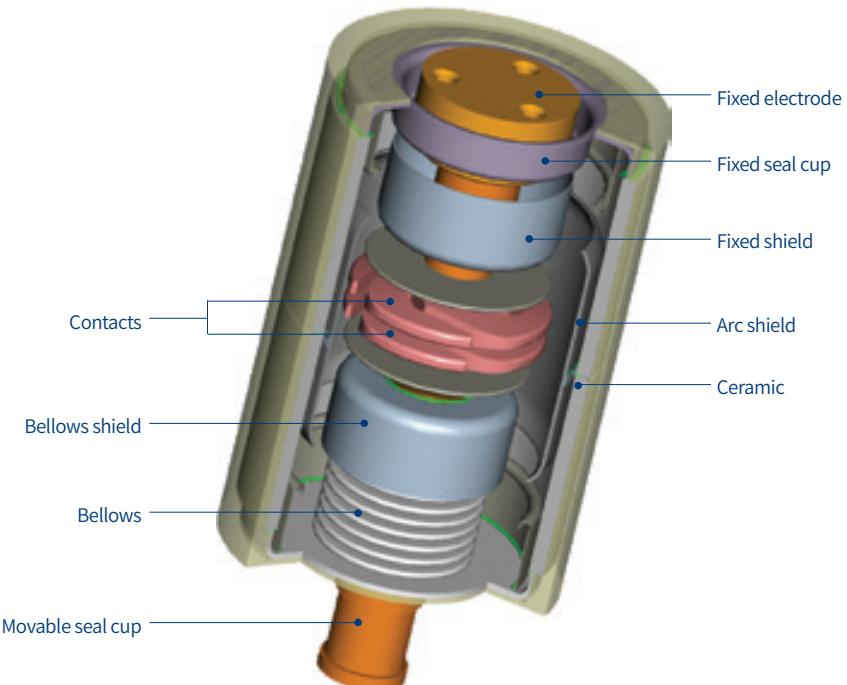

An example of oscillogram obtained through the interrupting test using LC resonant circuit

# Basic functions and interrupting operation

## The interruption of vacuum interrupters

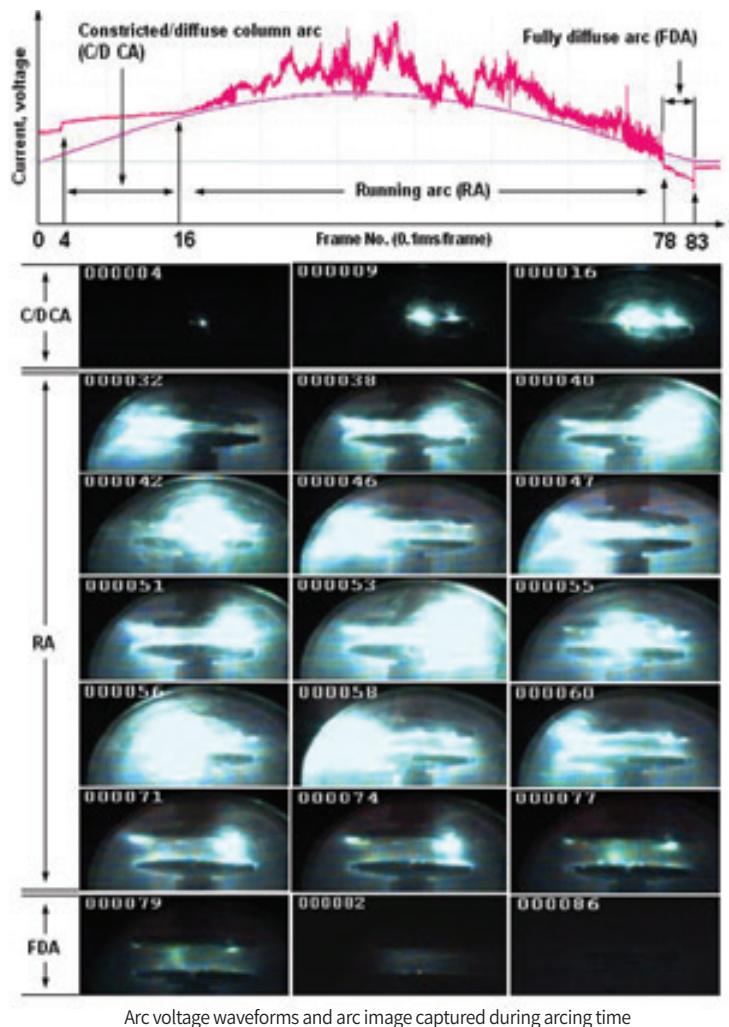

In case of using the flat contact any of the designs do not reflect on when contacts are opening the arc with high temperature is contracted and fixed in the center of the contacts, Which is called pinch effect.


To prevent the effect two kinds of contact shapes are designed. One is Axial magnetic field which spreads the arc before its contraction, and the other is Radial magnetic field which permits the contraction of the arc but makes it rotated to disperse the energy.

Because contracted arc is shaped like a cylinder it is called Contracted arc or columnar arc.

Spiral contact structure (Radial magnetic field), using the force ( $F = j \times B$ ) generated by the interaction of the radial magnetic field caused by the current flowing through the arc between two contacts, disperse the arc energy evenly on the surface of contact by rotating the arc that is contracted by the pinch effect so as to minimize contact damage.

The images show arc behavior during the arcing time of about 8ms by shooting with high-speed camera capable of shooting 10,000 frames per sec. (10000FPS) by focusing on parts of the arcing time on the above graph and simultaneously measured arc voltage also represented to show arc state by section.

Radial magnetic field type contact

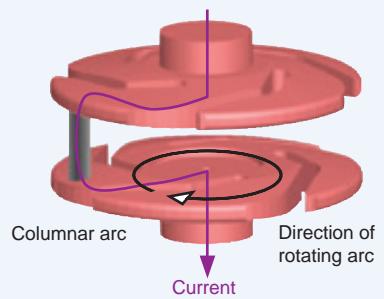

Arc driving principle in the contacts of Radial magnetic field

Susol VCB has been type tested and obtained certifications according to the latest IEC standard at international testing laboratory and can be installed and applied at the environment and conditions in accordance with the standard.

## ● Standard

- IEC 62271-1 (2007.10)  
High-voltage switchgear and controlgear - Part 1: Common specifications.
- IEC 62271-100 (2008.04)  
High-voltage switchgear and controlgear - Part 2: Alternating-current circuit breakers.

## ● Test and certification

- Test report (KERI)
- Test report (KEMA)

TEST REPORT		2004TS00964 5/47
CLASSIFICATION	Type Test	
APPARATUS	Vacuum Circuit Breaker	
DESIGNATION	IEC-62271-100	
RATING(S)	3 poles 55.8 kV 2,500 A 46 MA 50 Hz	
APPLIED STANDARD	IEC 62271-1/00-2008-04	
RECEIPT No.	T006950008 (December 11, 2008)	
APPLICANT	LS Industrial Systems Co., Ltd. Songdo-dong 1, Hwaseong-si, Cheongju-si, 361-720, Korea	
MANUFACTURER	LS Industrial Systems Co., Ltd. Songdo-dong 1, Hwaseong-si, Cheongju-si, 361-720, Korea	
DATE OF TESTS	June 30, 2008 ~ September 21, 2008	
DATE OF ISSUE	December 14, 2009	
<small>The test results have been carried out in accordance with IEC 62271-100-2008-04 &amp; applicant's specification.</small>		
<small>The test results are presented in the records of tests with the performance of apparatus and the observations made during the tests. The oscilograms are attached.</small>		
<small>The obtained values and the general performances are considered to comply with requirements of the above standard for the performed type tests.</small>		
<small>The test results apply only to the tested specific samples. This document shall not be reproduced except in full, without a written approval.</small>		
NO. OF PAGES INCORPORATED	records (47), photographs (4), circuit diagrams (1), oscilograms drawings & descriptions (2), attachments (8)	
		
Prepared by	<i>Park, Bo-Sun</i>	
Verified by	<i>Park, Bo-Sun</i>	
Sponsored by (Technical manager)	<i>Park, Sung-Jae</i>	
Power Apparatus Testing & Evaluation D		
<small>KOREA ELECTROTECHNOLOGY RESEARCH INSTITUTE No. 1, 3rd, 357-19, Taejon-gu, Daejeon, Republic of Korea, 305-190 Tel : +82-11-8640-4144, Fax : +82-29-8640-9490, www.keti.or.kr KERI Laboratories are accredited to ISO/IEC 17025:2005 Laboratory Accreditation</small>		
<small>TYPE TEST CERTIFICATE OF CAPACITIVE SWITCHING PERFORMANCE:084136-L</small>		
APPARATUS	A three-phase withdrawable vacuum circuit breaker in a testing cradle	
DESIGNATION	LVB-12-25-06	Serial No. 20040020001
	LVB-12-25-07	Serial No. 20040020002
	LVB-12-25-08	Serial No. 20040020003
RATED VOLTAGE	12 kV	RATED FREQUENCY 50/60 Hz
RATED NORMAL CURRENT	630, 1250/2500A	RATED SHORT CIRCUIT CURRENT: 25 kA
MANUFACTURER	LS Industrial Systems Co., Ltd., Hwaseong-si, Cheongju-si, Korea	
CLIENT	LS Industrial Systems Co., Ltd., Hwaseong-si, Cheongju-si, Korea	
TESTED BY	KEMA-Powerhead, Inc., Charlotte, NC, USA	
DATE(S) OF TESTS	Sept. 14-26, 2008	
<small>The apparatus, constructed in accordance with the description, drawings and photographs incorporated in this Certificate, has been subjected to the series of proving tests in accordance with IEC 62271-100-2008, sub clause 6.11.</small>		
<small>THE RESULTS ARE SHOWN IN THE RECORD OF PROVING TESTS AND THE OSCELO DOCUMENTS ATTACHED HERETO. THE VALUES OBTAINED AND THE GENERAL PERFORMANCE ARE CONSIDERED TO COMPLY WITH THE ABOVE STANDARD AND TO JUSTIFY THE RATINGS ASSIGNED BY THE MANUFACTURER AS LISTED ON PAGE 1.</small>		
<small>This Certificate and Record of Proving Tests applies only to the specific piece of apparatus tested from the particular place of manufacture. The responsibility for conformity of any apparatus having the same designation with that tested rests with the manufacturer at the place of manufacture of that apparatus.</small>		
<small>This Certificate consists of 80 pages in total.</small>		
		
<small>Only reproduction of the complete Certificate, or reproductions of the pages accompanied by the paper on which any related tests performed and the assigned rated characteristics of the apparatus tested, are permitted without permission from KEMA-Powerhead.</small>		
<small>M. F. Schaefer <i>[Signature]</i> Date: <i>[Signature]</i> Date: <i>[Signature]</i></small>		
<small>Form: 0840P-02 Certificate Number: 0803-01</small>		

# Types and ordering information

## 7.2kV (VL-06)

### Breaker

<b>VL</b>	—	<b>06</b>	<b>P</b>	<b>08</b>	<b>A</b>	<b>04</b>
<b>Basic model name</b>		<b>Rated voltage (kV)</b>	<b>Version</b>	<b>Rated short time current (kA)</b>	<b>Phase distance/Compatibility</b>	<b>Rated current (A)</b>
VL Susol VCB		06 7.2	P Fixed E E type drawout F F type drawout G G type drawout	08 8 13 12.5	A Standard B Compatible with existing breaker <small>Note6</small>	04 400 06 630

<b>VL-06E08A04</b>	—	<b>M1</b>	<b>C1</b>	<b>T1</b>	<b>SA1</b>	<b>U1</b>	—	<b>A</b>	<b>147</b>		
		<b>Motor control voltage</b>		<b>Trip coil voltage</b>		<b>UVT</b> <small>Note5</small>					
		M1 DC 110V M2 DC 220V~250V M3 DC 125V M4 DC 24V~30V M5 DC 48V~60V M6 AC 48V M7 AC 100V~130V M8 AC 200V~250V		T1 DC 110V T2 DC 220V~250V T3 DC 125V T4 DC 24V~30V T5 DC 48V~60V T6 AC 48V T7 AC 100V~130V T8 AC 200V~250V T9 Current trip coil		U0 Without UVT U1 DC 110V U2 DC 220V~250V U3 DC 125V U4 DC 24V~30V U5 DC 48V~60V U6 AC 48V U7 AC 100V~130V U8 AC 200V~250V					
		<b>Closing coil voltage</b>		<b>Connector and wire</b>		<b>Other accessories</b> <small>Note6</small>					
		C1 DC 110V C2 DC 220V~250V C3 DC 125V C4 DC 24V~30V C5 DC 48V~60V C6 AC 48V C7 AC 100V~130V C8 AC 200V~250V		SA1 A type connector, 2a2b SA2 Standard A type connector, 4a4b SA3 A type connector, 6a6b <small>Note5</small> SA5 A type connector, 2a2b SA6 Flame retardant A type connector, 4a4b SA7 A type connector, 6a6b <small>Note5</small>		1 Secondary Trip coil <small>Note5</small> 3 Position S/W (Test : 1a1b, Service : 2b) 4 Position S/W (Test : 2a, Service : 2a) 5 Position S/W (Test : 1a1b, Service : 1a1b) 7 Key lock 8 Button Padlock 9 Button cover A Lead wire B User Plug (Part) O Lead Wire special color (Blue)					
				<b>Optional</b>		<b>Note</b> 1. In the case of selecting accessories such as A1(Secondary trip coil), A4(Position S/W 2a2a)and A7(Key lock), A147 is type name in the ordering. 2. Unable to select A1(Secondary Trip coil), U1~U8(UVT)and T9(Current trip coil) simultaneously. 3. A4(Position S/W 2a2a) and A5(Position S/W 2a2b) can not be selected simultaneously. 4. A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously. 5. Maximum number of Auxiliary Contacts available are 5a5b, 5a6b in the case of selecting A1(Secondary trip coil), U1~U8(UVT). 6. In case of using the existing old type cradle and replacing breaker only please order type B (Compatible with existing breaker). Compatibile busbars are required for fixed version. 7. If T9(CTC) is selected, in case of adding Secondary trip coil, CTC is also added.					

Note A is written only once in case of more than one.

## Cradle

VCL	—	06	E	08	A	06
Basic model name		Rated voltage (kV)	Version	Rated short time current (kA)	Phase distance/Compatibility	Rated current (A)
VCL	Susol VCB Cradle	06      7.2	E      E type drawout F      F type drawout G      G type drawout	08      8 13      12.5	A      Standard B      Compatible with existing breaker <small>Note6)</small>	04      400 06      630

Note) In case of replacing the existing old type VCB with Susol VCB please order type B for cradle and A for breaker.

# Types and ordering information

## 7.2/12/17.5kV (VL-06/12/17)

### Breaker

VL	—	06	H	20	A	06
Basic model name		Rated voltage (kV)	Version	Rated short time current (kA)	Phase distance/Compatibility	Rated current (A)
VL Susol VCB		06 7.2 12 12 17 17.5	P Fixed E E type drawout (for MESG) F F type drawout (for MESG) Fs Fs type drawout (Screw Type) G G type drawout (for MESG) Gs Gs type drawout (Screw Type) K K type drawout (for MCSG compatible with Pro-MEC) H H type drawout (for MCSG)	20 20 25 25 32 31.5	A 150mm B 210mm D 275mm F Compatible with existing products K Compatible with K Pro-MEC G/T(T)	06 630 13 1250 20 2000 25 2500

- Note) 1. Breaking current 31.5kA: E/F/Fs/G type can be used only with 7.2k  
 2. Gs/K type: Usable only 7.2/12kV  
 K type Compatible with Pro-MEC G/T(T) (for withdrawable type for MCSG)

- Note)  
 1. In case of 7.2kV  
 1) Phase distance 150mm only  
 2) 20/25kA: only 630/1250/2000A available (E/F/G)  
 3) 31.5kA: only 1250/2000A available (E/F/G)  
 2. K type: phase distance 150mm only  
 3. In case of 12/17.5kV  
 1) H type: phase distance 150/210/275 all available  
 2) P type 630/1250A: phase distance 150/210 all available  
 3) In case of 20/25kA: 12/17.5kV E/F type phase distance 210 available  
 4) K type: compatible with Pro-MEC G/T(T) (phase distance 150mm)  
 5) F type (compatible with existing products): Available only to 20/25kA and 630/1250A (phase distance 210mm)  
 4. Rated current 2500A: only available 31.5kA P/H type (phase distance 210/275mm)

VL-06H20A06	—	M1	C1	T1	SQ2	U1	—	A	147
Motor control voltage		Trip coil voltage				UVT			
M1 DC 110V		T1 DC 110V				U0 Without UVT			
M2 DC 220V~250V		T2 DC 220V~250V				U1 DC 110V			
M3 DC 125V		T3 DC 125V				U2 DC 220V~250V			
M4 DC 24V~30V		T4 DC 24V~30V				U3 DC 125V			
M5 DC 48V~60V		T5 DC 48V~60V				U4 DC 24V~30V			
M6 AC 48V		T6 AC 48V				U5 DC 48V~60V			
M7 AC 100V~130V		T7 AC 100V~130V				U6 AC 48V			
M8 AC 200V~250V		T8 AC 200V~250V				U7 AC 100V~130V			
		T9 Current trip coil				U8 AC 200V~250V			

Closing coil voltage		Connector and wire		Other accessories Note)	
C1	DC 110V	SA2	A type connector, 4a4b	1	Secondary Trip coil
C2	DC 220V~250V	SA4	A type connector, 10a10b	2	Secondary Trip Coil with TCM Contact
C3	DC 125V	Standard	Q type connector, 4a4b	3	Position S/W (Test: 1a1b, Service: 2b)
C4	DC 24V~30V	SQ4	Q type connector, 10a10b	4	Position S/W (Test: 2a, Service: 2a)
C5	DC 48V~60V	SA6	A type connector, 4a4b	5	Position S/W (Test: 1a1b, Service: 1a1b)
C6	AC 48V	SA8	A type connector, 10a10b	7	Key lock
C7	AC 100V~130V	Flame retardant	Q type connector, 4a4b	8	Button Padlock
C8	AC 200V~250V	SQ6	Q type connector, 10a10b	9	Button Cover
		SQ8	Q type connector, 10a10b	A	Lead Wire

Optional	
CTD1	Condenser Trip Device(AC 110V)
CTD2	Condenser Trip Device(AC 220V)
UDC1	UVT Time Delay Controller(AC/DC 110V)
UDC2	UVT Time Delay Controller(AC/DC 220V)
UDC3	UVT Time Delay Controller(AC/DC 48V)
CTU	Coil Test Unit

Note) A is written only once in case of more than one.

## Cradle

<b>VCL</b>	—	<b>06</b>	<b>H</b>	<b>20</b>	<b>A</b>	<b>06</b>	—	<b>A</b>	<b>157</b>
<b>Basic model name</b>									
VCL Susol VCB Cradle									
<b>Rated voltage (kV)</b>					<b>Rated short time current (kA)</b>				
06 7.2 12 12 17 17.5					20 20 25 25 32 31.5				
<b>Version</b>					<b>Phase distance/Compatibility</b>				
P Fixed E E type drawout (for MESG) F F type drawout (for MESG) Fs Fs type drawout (Screw Type) G G type drawout (for MESG) Gs Gs type drawout (Screw Type) K K type drawout (for MCSG compatible with Pro-MEC) Ha Ha type drawout (for MCSG) H H type drawout (for MCSG)					A 150mm B 210mm D 275mm F Compatible with existing products K Compatible with K Pro-MEC G/T(T)				
<b>Note)</b>					<b>Note)</b>				
1. Breaking current 31.5kA: E/F/Fs/G type can be used only with 7.2kV 2. Gs/K type: Usable only 7.2/12kV K type Compatible with Pro-MEC G/T(T) (for withdrawable type for MCSG) 3. Ha type: 7.2/12kV phase-to-phase 150mm only. Not available for 2500A					1. In case of 7.2kV 1) Phase distance 150mm only 2) 20/25kA: only 630/1250/2000A available (E/F/G) 3) 31.5kA: only 1250/2000A available (E/F/G) 2. K type: phase distance 150mm only 3. In case of 12/17.5kV 1) H type: phase distance 150/210/275 all available 2) P type 630/1250A: phase distance 150/210 all available 3) In case of 20/25kA: 12/17.5kV E/F type phase distance 210 available 4) K type: compatible with Pro-MEC G/T(T) (phase distance 150mm) 5) F type (compatible with existing products): Available only to 20/25kA and 630/1250A (phase distance 210mm) 4. Rated current 2500A: only available 31.5kA P/H type (phase distance 210/275mm)				
<b>Other accessories</b>					<b>Other accessories</b>				
1 ES(Standard earthing Switch) without option 2 ES with position S/W(2a2b) 4 ES with position S/W(6a6b) 5 Key lock for ES 6 Locking magnet for ES: DC 110V 7 Locking magnet for ES: DC 220V 8 Locking magnet for ES: DC 125V 9 Locking magnet for ES: DC 24V A Locking magnet for ES: DC 48V B Locking magnet for ES: AC 48V C Locking magnet for ES: AC 110V D Locking magnet for ES: AC 220V E Shutter padlock F TOC(Truck Operating Cell S/W) G MOC (Mechanical Operating Cell S/W) H Door J Door Interlock K Door Emergency Push Button L Temperature Monitoring Sensor M H type Lead wire 4a4b (Flame retardant wire) N H type Lead wire 10a10b (Flame retardant wire) O H type Lead wire 4a4b (Rated short time current)					1 ES(Standard earthing Switch) without option 2 ES with position S/W(2a2b) 4 ES with position S/W(6a6b) 5 Key lock for ES 6 Locking magnet for ES: DC 110V 7 Locking magnet for ES: DC 220V 8 Locking magnet for ES: DC 125V 9 Locking magnet for ES: DC 24V A Locking magnet for ES: DC 48V B Locking magnet for ES: AC 48V C Locking magnet for ES: AC 110V D Locking magnet for ES: AC 220V E Shutter padlock F TOC(Truck Operating Cell S/W) G MOC (Mechanical Operating Cell S/W) H Door J Door Interlock K Door Emergency Push Button L Temperature Monitoring Sensor M H type Lead wire 4a4b (Flame retardant wire) N H type Lead wire 10a10b (Flame retardant wire) O H type Lead wire 4a4b (Rated short time current)				
<b>Optional</b>					<b>Optional</b>				
TM Temperature Monitoring					TM Temperature Monitoring				

Note) 1. These accessories for cradle and TM can be applied only to H type. (When ordering TM, AL option must be selected)

- 2. AJ and AK can not be selected without door (AH).
- 3. H type lead wire - one of AM, AN or AO is required for cradle in case of H type breaker.
- 4. Unable to select AK at the cradle in the case of selecting A8(Button Padlock), A9(Button Cover) for body of H-type.
- 5. When Keylock(A5) is selected, Earthing Switch is included as standard.
- 6. Please contact us if you need IAC (Internal arc classification) of H type CB compartment.
- 7. For Ha-type cradle, Shutter padlock (AE) can be selected, and only when Earthing Switch (A1~A4) is selected, A5, A6~AD can be selected.

Note) A is written only once in case of more than one.

# Types and ordering information

## 24/25.8/36kV (VL-20/25/36)

### Breaker

VL	—	20	H	13	B	06	
Basic model name		Rated voltage (kV)	Version		Rated short time current (kA)	Phase distance/Compatibility	Rated current (A)
VL	Susol VCB	20      24	P      Fixed	13      12.5	B      210mm	06      630	
		25      25.8	E      E type drawout (for MESG)	16      16	F      265mm	13      1250	
		36      36	F      Ftype drawout (for MESG)	25      25	D      275mm	20      2000	
			G      G type drawout (for MESG)		G      Enclosed type, Tulip Contact	25      2500	
			K      Ktype drawout (for MCSG compatible with Pro-MEC)				
			H      H type drawout (for MCSG)				

Note) - P, E, F type : phase distance 265mm only  
 - G-type: 630A and 1250A - 210mm and 265mm 2000A - phase distance 210mm only  
 - K-type: 630A and 1250A - , 210mm and 265mm 2000A - phase distance 265mm only  
 - H-type: All ratings - dual phase distance, 210mm and 275mm dual (2500A - phase distance 275mm only)  
 - E, F-type: phase distance and appearance are distinguished with F and G

VL-20H13B06	—	M1	C1	T1	SQ2	U1	—	A	147
		Motor control voltage	Trip coil voltage		UVT				
		M1 DC 110V	T1 DC 110V		U0 Without UVT				
		M2 DC 220V~250V	T2 DC 220V~250V		U1 DC 110V				
		M3 DC 125V	T3 DC 125V		U2 DC 220V~250V				
		M4 DC 24V~30V	T4 DC 24V~30V		U3 DC 125V				
		M5 DC 48V~60V	T5 DC 48V~60V		U4 DC 24V~30V				
		M6 AC 48V	T6 AC 48V		U5 DC 48V~60V				
		M7 AC 100V~130V	T7 AC 100V~130V		U6 AC 48V				
		M8 AC 200V~250V	T8 AC 200V~250V		U7 AC 100V~130V				
			T9 Current trip coil		U8 AC 200V~250V				


Closing coil voltage		Connector and wire		Other accessories Note)	
C1	DC 110V	SA2	A type connector, 4a4b	1 Secondary Trip coil	
C2	DC 220V~250V	SA4	A type connector, 10a10b	2 Secondary Trip Coil with TCM Contact	
C3	DC 125V	Standard	Q type connector, 4a4b	3 Position S/W (Test: 1a1b, Service: 2b)	
C4	DC 24V~30V	SQ4	Q type connector, 10a10b	4 Position S/W (Test: 2a, Service: 2a)	
C5	DC 48V~60V	SA6	A type connector, 4a4b	5 Position S/W (Test: 1a1b, Service: 1a1b)	
C6	AC 48V	SA8	A type connector, 10a10b	7 Key lock	
C7	AC 100V~130V	Flame retardant	Q type connector, 4a4b	8 Button Padlock	
C8	AC 200V~250V	SQ6	Q type connector, 10a10b	9 Button Cover	
		SQ8	Q type connector, 10a10b	A Lead Wire	
				B User Plug (Part)	
				C Plug Interlock	
				D Padlock (H type Door Interlock)	
				E MOC (Mechanical Operating Cell S/W)	
				F Locking Magnet	
				J Door Interlock	
				O Lead Wire special color (Blue)	
				V CT operated coil 1A	
				W CT operated coil 5A	

- Note)  
 1. If A2 (UVT), A4 (Position S/W 2a2b) and A7 (Keylock) are selected, A147 is the type name in the ordering.  
 2. Unable to select A1(Secondary trip coil), U1-U8(UVT) simultaneously.  
 3. A3(Position S/W 1a3b), A4(Position S/W 2a2a), A5(Position S/W 2a2b)can not be selected simultaneously.  
 4. A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously.  
 5. When A1 (Secondary Trip coil) is selected the maximum available auxiliary contacts are 9a9b.  
 6. When A2(Secondary trip coil with TCM Contact) is selected the maximum available auxiliary contacts are 4a3b, 9a8b.  
 7. AC (Plug interlock), AD (H type Door interlock), AE (MOC) and AF (Locking magnet) are available only for H type.  
 8. A/Q-type connector is applicable to P/E/F/G type and Q-type connector to H type.  
 9. Lead wire special color (blue) is applicable to A-type connector.  
 10. When the position switch is selected from accessories, auxiliary contacts and wiring ass'y can be selected as option A/Q-type (P/E/F/G/K-type) or Q-type(H-type) connector  
 11. Locking magnet of H type breaker use the same control power supply as motor.  
 12. Flame retardant type blue wire is not available.  
 13. When current Trip Coil AV(CTC 1A) or AW(CTC 5A) is selected, A1(Secondary Trip Coil), U1-U8(UVT) cannot be selected simultaneously and the maximum auxiliary contact is 4a4b.

Optional	
CTD1	Condenser Trip Device(AC 110V)
CTD2	Condenser Trip Device(AC 220V)
UDC1	UVT Time Delay Controller(AC/DC 110V)
UDC2	UVT Time Delay Controller(AC/DC 220V)
UDC3	UVT Time Delay Controller(AC/DC 48V)
CTU	Coil Test Unit

Note) A is written only once in case of more than one.

## Cradle

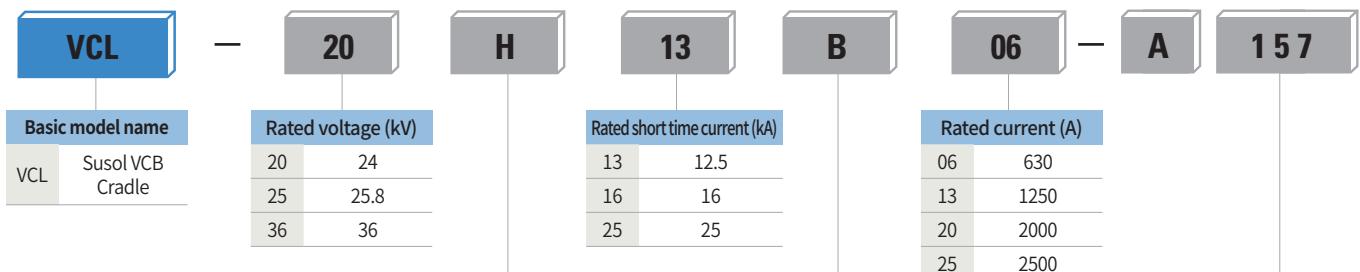

Version	
E	E type drawout (for MESG)
F	F type drawout (for MESG)
G	G type drawout (for MESG)
K	K type drawout (for MCSG compatible with Pro-MEC)
H	H type drawout (for MCSG)

Note) K-type(compatible with Pro-MEC G/T(T)) cradle for MCSG is for below product - LCL-20G-13D/T,15D/T, 25D/T

Phase distance/Compatibility	
B	210mm
F	265mm
D	275mm
G	Enclosed type, Tulip Contact

Note) - P, E, F type: phase distance 265mm only  
 - G-type: 630A and 1250A – 210mm and 265mm  
 2000A – phase distance 210mm only  
 - K-type: 630A and 1250A, 210mm and  
 265mm  
 2000A - phase distance 265mm only  
 - H-type: All ratings - dual phase distance,  
 210mm and 275mm dual  
 (2500A - phase distance 275mm only)  
 - E, F-type: phase distance and appearance  
 are distinguished with F and G

Other accessories	
1	ES(Standard earthing Switch) without option
2	ES with position S/W(2a2b)
4	ES with position S/W(6a6b)
5	Key lock for ES
6	Locking magnet for ES: DC 110V
7	Locking magnet for ES: DC 220V
8	Locking magnet for ES: DC 125V
9	Locking magnet for ES: DC 24V
A	Locking magnet for ES: DC 48V
B	Locking magnet for ES: AC 48V
C	Locking magnet for ES: AC 110V
D	Locking magnet for ES: AC 220V
E	Shutter padlock
F	TOC(Truck Operating Cell S/W)
G	MOC (Mechanical Operating Cell S/W)
H	Door
J	Door Interlock
K	Door Emergency Push Button
L	Temperature Monitoring Sensor
M	H type Lead wire 4a4b (Flame retardant wire)
N	H type Lead wire 10a10b (Flame retardant wire)
O	H type Lead wire 4a4b (Rated short time current)

Optional	
TM	Temperature Monitoring


Note) A is written only once in case of more than one.


- Note) 1. These accessories for cradle and TM can be applied only to H type.  
 2. AJ and AK can not be selected without door (AH).  
 3. TM (Temperature Monitoring) should be used with AL (Temperature Sensor).  
 4. H type lead wire - one of AM, AN or AO is required for cradle in case of H type breaker.  
 5. Accessory A2~AQ is available to H-type. Exceptionally K-type is available to A1.  
 (Position S/W 4a4b is basic option of A1)  
 6. Unable to select AK at the cradle in the case of selecting A8(Button Padlock), A9(Button Cover) for body of H-type.  
 7. When Keylock(A5) is selected, Earthing Switch is included as standard.  
 8. Please contact us if you need IAC (Internal arc classification) of H type CB compartment.

# Types and ordering information

## 7.2/12kV (LVB-06/12)

### Breaker

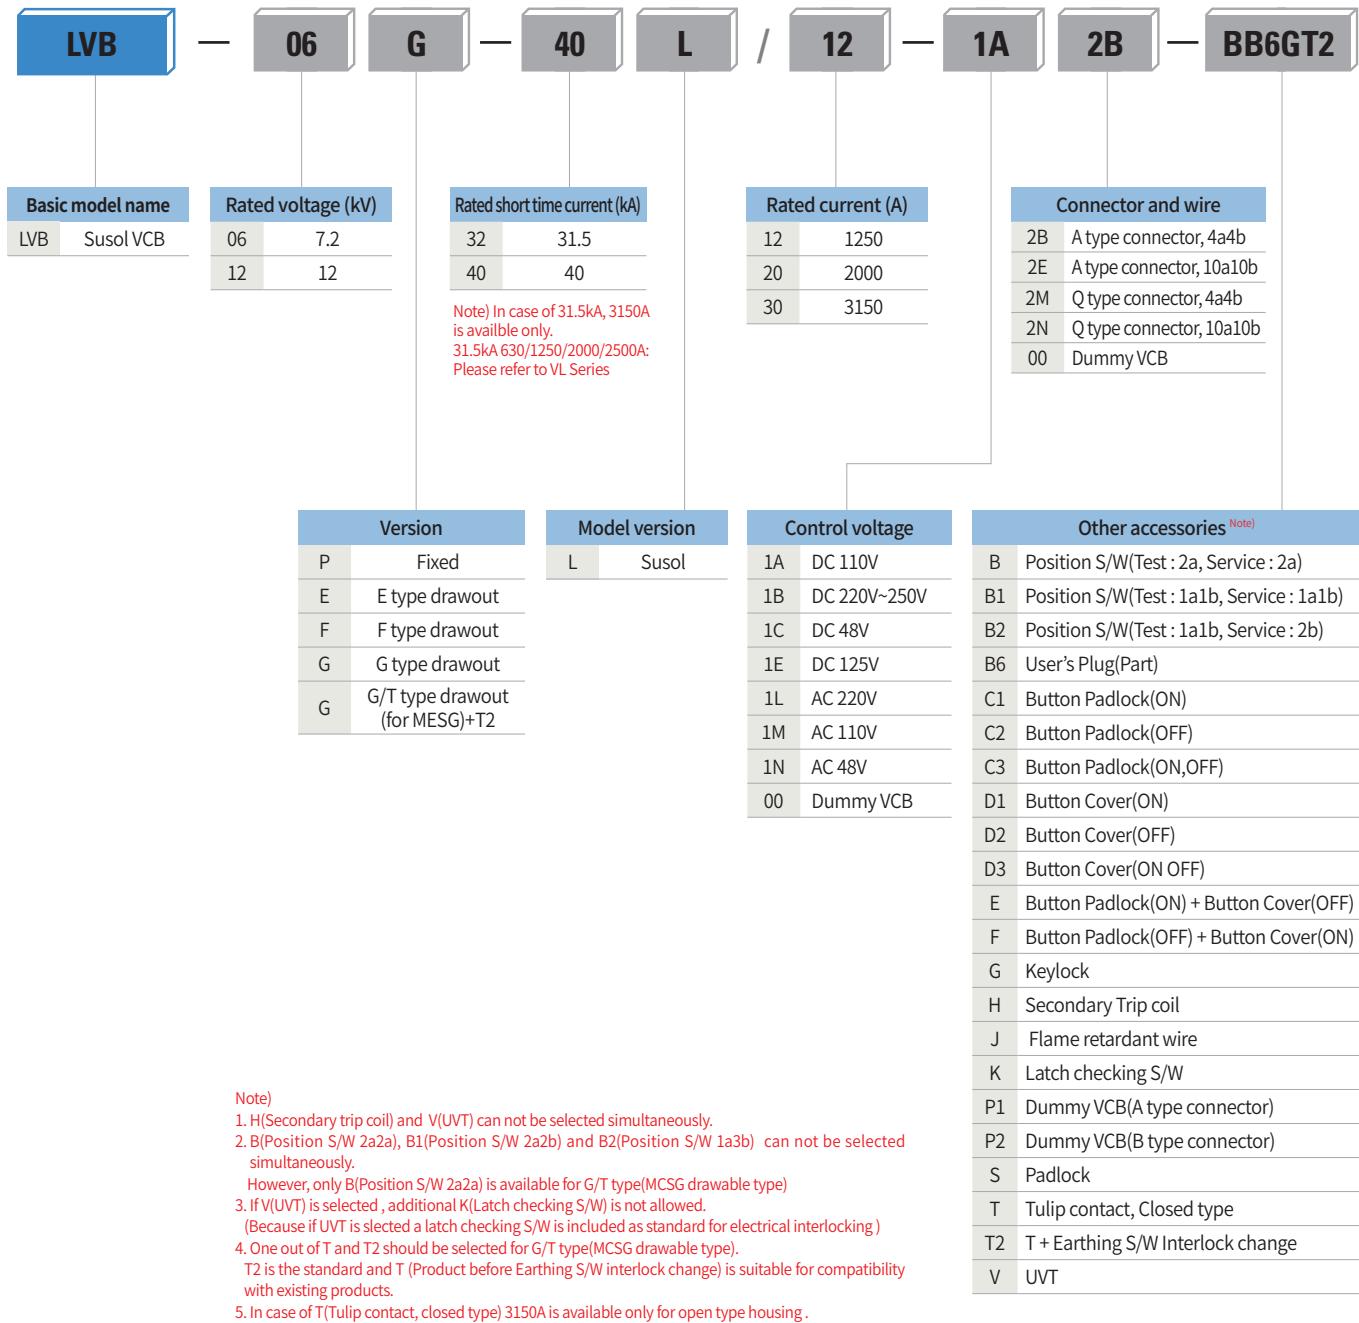

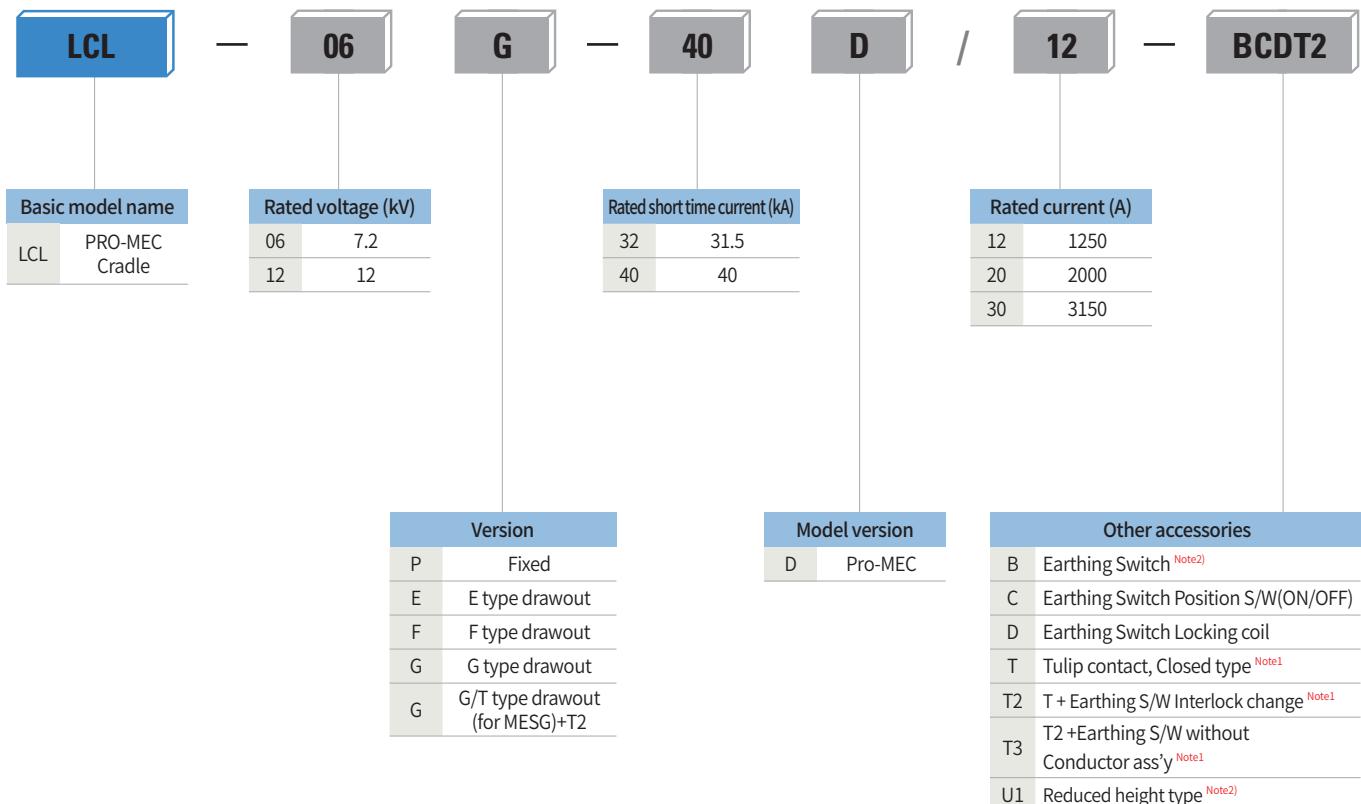**Cradle**

**Note)** 1. One out of T, T2 and T3 should be selected for G/T type(MCSG drawable type).  
 T2 is the standard and T (Product before Earthing S/W interlock change) is suitable for compatibility with existing products.  
 T3 is available only for 1250/2000A.

2. U1(Reduced height type) and B(Earthing S/W) can not be selected simultaneously.

# Types and ordering information

## 7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

### Breaker

VH	—	06	H	25	B	13
Basic model name		Rated voltage (kV)	Version	Rated short time current (kA)	Phase distance/Compatibility	Rated current (A)
VH	Susol VCB	06 7.2	P Fixed	25 25	A 150mm	12 1200A
		12 12	E E type drawout (for MESG)	32 31.5	B 210mm	13 1250A
		17 17.5	F F type drawout (for MESG)	40 40	D 275mm	20 2000A
		20 24	Fs Fs type drawout (Screw Type)	50 50	E 300mm	25 2500A
		25 25.8	G G type drawout (for MESG)	Note) 1. 25kA is for 24/36kV 2. 31.5/40kA is for 7.2/12/17.5/24/36kV 3. 50kA is for 7.2/12/17.5kV		32 3150A
		36 36	Gs Gs type drawout (Screw Type)			40 4000A
			K K type drawout (for MCSG compatible with Pro-MEC type)			50 5000A
			H H type drawout (for MCSG)			

Note) K can be selected for Pro-MEC G/T(T) compatible models ONLY and the phase distance is 150mm.

Note) Refer to the rating table for selecting rated current.

VH-06H25B13	—	M1	C1	T1	S02	U1	—	A	147
		Motor control voltage		Trip coil voltage		UVT			
		M1 DC 110V		T1 DC 110V		U0 Without UVT			
		M2 DC 220V~250V		T2 DC 220V~250V		U1 DC 110V			
		M3 DC 125V		T3 DC 125V		U2 DC 220V~250V			
		M5 DC 48V		T5 DC 48V		U3 DC 125V			
		M6 AC 48V		T6 AC 48V		U5 DC 48V			
		M7 AC 110V		T7 AC 110V		U6 AC 48V			
		M8 AC 220V		T8 AC 220V		U7 AC 110V			
						U8 AC 220V			

- Note)  
 1. If A1(Secondary trip coil), A4(Position S/W 2a2a), A7(Keylock) are selected, A147 is the type name in the ordering.  
 2. A1(Secondary trip coil), U1~U8(UVT) can not be selected simultaneously.  
 3. A3(Position S/W 1a3b), A4(Position S/W 2a2a), A5(Position S/W 2a2b) can not be selected simultaneously.  
 4. A8 (Button Padlock) and A9 (Button Cover) can not be selected simultaneously.  
 5. AC (Plug interlock), AD (H type Door interlock), AE (MOC) and AF (Locking magnet) are available only for H type.  
 6. A/Q-type connector is applicable to P/E/F/G/K type and Q-type connector to H type.  
 7. Lead Wire Special Color(blue) is available only for A type connector and the flame retardant is not applicable to it.  
 8. Locking magnet can be applied only to H type VCB - breaker and cradle.  
 9. Locking magnet of H type breaker use the same control power supply as motor.  
 10. In case of selecting UVT A6 (Latch checking S/W) is not allowed. A6 (Latch checking S/W) is installed by default to make electrical interlock with UVT.  
 11. Lead wire is enclosed in the breaker in case of ordering fixed type or H type breaker without cradle, installed of cradle in case of ordering the breaker with cradle. If user plug is selected it will be enclosed in the breaker.  
 12. When A1(Secondary trip coil) is selected the maximum available auxiliary contacts are 10a10b.  
 13. When A2(Secondary Trip coil with TCM Contact) is selected the maximum available auxiliary contacts are 4a3b, 10a9b.

Closing coil voltage		Connector and wire		Other accessories <small>Note)</small>	
C1	DC 110V	SA2	A type connector, 4a4b	1	Secondary Trip coil
C2	DC 220V~250V	SA4	A type connector, 10a10b	2	Secondary Trip Coil with TCM Contact
C3	DC 125V	Standard	Q type connector, 4a4b	3	Position S/W (Test: 1a1b, Service: 2b)
C5	DC 48V	SQ4	Q type connector, 10a10b	4	Position S/W (Test: 2a, Service: 2a)
C6	AC 48V	SA6	A type connector, 4a4b	5	Position S/W (Test: 1a1b, Service: 1a1b)
C7	AC 110V	SA8	A type connector, 10a10b	7	Key lock
C8	AC 220V	Flame retardant	Q type connector, 4a4b	8	Button Padlock
		SQ8	Q type connector, 10a10b	9	Button Cover

Optional	
CTD1	Condenser Trip Device(AC 110V)
CTD2	Condenser Trip Device(AC 220V)
UDC1	UVT Time Delay Controller(AC/DC 110V)
UDC2	UVT Time Delay Controller(AC/DC 220V)
UDC3	UVT Time Delay Controller(AC/DC 48V)
CTU	Coil Test Unit

Note) A is written only once in case of more than one.

## Cradle

<b>VCH</b>	—	<b>06</b>	<b>H</b>	<b>25</b>	<b>B</b>	<b>13</b>	—	<b>A</b>	<b>157</b>
<b>Basic model name</b>									
VCH Susol VCB Cradle									
<b>Rated voltage (kV)</b>		<b>Rated short time current (kA)</b>		<b>Rated current (A)</b>					
06	7.2	25	25	12	1200A				
12	12	32	31.5	13	1250A				
17	17.5	40	40	20	2000A				
20	24	50	50	25	2500A				
25	25.8			32	3150A				
36	36			40	4000A				
				50	5000A				

Version	
P	Fixed
E	E type drawout (for MESG)
F	F type drawout (for MESG)
Fs	Fs type drawout (Screw Type)
G	G type drawout (for MESG)
Gs	Gs type drawout (Screw Type)
K	K type drawout (for MCGS compatible with Pro-MEC type)
Ha	Ha type drawout (for MCGS)
Hb	Hb type drawout (for MCGS)
H	H type drawout (for MCGS)

- \* Only K-type cradle is available for 4000A.
- \* E/F/Fs/Gs/K-type (open type cradle)
- \* H-type (box type cradle)
- \* Applies Ha type
  - 1) 7.2/12kV 40kA 1250/2000A phase distance 150mm
  - 2) 7.2/12/17.5kV 40kA 3150A phase distance 210mm
  - 3) 7.2/12/17.5kV 40/50kA 4000A phase distance 275mm
  - 4) 7.2/12kV 40/50kA 5000A phase distance 320mm
- \* Applies Hb type
  - 1) 7.2/12kV 40/50kA 4000A phase distance 275mm

Phase distance/Compatibility	
A	150mm
B	210mm
D	275mm
E	300mm
J	Rotated bushing type (210mm)
L	320mm

Other accessories (H type)	
1	ES(Standard earthing Switch) without option
2	ES with position S/W(2a2b)
4	ES with position S/W(6a6b)
5	Key lock for ES
6	Locking magnet for ES: DC 110V
7	Locking magnet for ES: DC 220V
8	Locking magnet for ES: DC 125V
A	Locking magnet for ES: DC 48V
B	Locking magnet for ES: AC 48V
C	Locking magnet for ES: AC 110V
D	Locking magnet for ES: AC 220V
E	Shutter padlock
F	TOC (Truck Operating Cell S/W)
G	MOC (Mechanical Operating Cell S/W)
H	Door
J	Door Interlock
K	Door Emergency Push Button
L	Temperature Sensor
M	H type Lead wire 4a4b (Flame retardant wire)
N	H type Lead wire 10a10b (Flame retardant wire)
O	H type Lead wire 4a4b (Rated short time current)
Q	ANSI type Charge interlock
T3	Earthing S/W without conductor ass'y
LC	Earthing S/W Locking coil
U1	Earthing S/W Locking coil

Note) T3, LC, U1 are options for K type cradle  
ONLY(Compatible with previous Pro-MEC models)

### Optional

TM Temperature Monitoring

Note) A is written only once in case of more than one.

- Note)
1. Cradle accessories and the option TM are available only for H type(MCSG drawable type) and Locking magnet is available in DC110V, DC125V for those three types.  
K, Ha, Hb types can only be applied to A1.
  2. AJ and AK can not be selected without door (AH).
  3. H type lead wire - one of AM, AN or AO is required for cradle in case of H type breaker.
  4. If the H type breaker options A8(Button Padlock) and A9(Button Cover) are selected, the cradle option AK(Door Emergency Push Button) is not available.
  5. When Keylock(A5) is selected, Earthing Switch is included as standard.
  6. T3/SM/LC/U1 can be selected for K type ONLY.
  7. When A1 is selected for 4000A, 5000A cradle, ES Position S/W with 4a4b is applied as default.
  8. If TOC/MOC option is selected, cradle's height is increased (E/S equipped structure, Hb ONLY).
  9. Ha type is open-type MCSG Cradle with NO door related options included.
  10. Please contact us if you need IAC (Internal arc classification) of H type CB compartment.
  11. For 7.2/12kV 40kA 1250/2000 Ha type cradles, Shutter padlock (AE) can be selected, and A5, A6~AD can be selected only when Earthing Switch (A1~A4) is selected.  
(For 7.2/12/17.5kV 40kA 3150A Ha type cradle, Earthing Switch cannot be selected, only Shutter padlock (AE) can be selected.)

# Type of circuit breakers

**7.2/12/17.5/24/25.8/36kV (VL-06/12/17/20/25/36)**

Ur [kV]	Isc [kA]	Ir[A]					VCB		CRADLE		Connector
		p=130	p=150	p=210	p=265	p=275	Type	Version	Type	Version	
7.2	8	400					VL-06□08A04	P,E,F,G	VCL-06□08A04	E,F,G	A
							VL-06□08B04	P,E,F,G	VCL-06□08B04	E,F,G	A
							VL-06□13A06	P,E,F,G	VCL-06□13A06	E,F,G	A
							VL-06□13B06	P,E,F,G	VCL-06□13B06	E,F,G	A
	12.5	630					VL-06□20A(K)06	P,E,F,G,H	VCL-06□20A(K)06	E,F,G,K,H,Ha	P,E,F,G,K:A/Q,H:Q
							VL-06□20A(K)13	P,E,F,G,H	VCL-06□20A(K)13	E,F,G,K,H,Ha	P,E,F,G,K:A/Q,H:Q
							VL-06□20A20	P,E,F,G,H	VCL-06□20A20	E,F,G,H,Ha	P,E,F,G,A/Q,H:Q
	20		630				VL-06□25A(K)06	P,E,F,G,K,H	VCL-06□25A06	E,F,G,K,H,Ha	P,E,F,G,K:A/Q,H:Q
			1250				VL-06□25A(K)13	P,E,F,G,K,H	VCL-06□25A13	E,F,G,K,H,Ha	P,E,F,G,K:A/Q,H:Q
			2000				VL-06□25A(K)20	P,E,F,G,K,H	VCL-06□25A20	E,F,G,K,H,Ha	P,E,F,G,K:A/Q,H:Q
	25		630				VL-06□32A06	P,H	VCL-06H32A06	H,Ha	Q
			1250				VL-06□32A(K)13	P,E,F,Fs,G,Gs,K,H	VCL-06□32A13	E,F,Fs,G,Gs,K,H,Ha	P,E,F,Fs,G,Gs,K:A/Q,H:Q
			2000				VL-06□32A(K)20	P,E,F,Fs,G,Gs,K,H	VCL-06□32A20	E,F,Fs,G,Gs,K,H,Ha	P,E,F,Fs,G,Gs,K:A/Q,H:Q
12	20		630				VL-12□20A(K)06	P,K,H	VCL-12□20A06	K,H,Ha	K:A/Q,H:Q
			1250				VL-12□20A(K)13	P,K,H	VCL-12□20A13	K,H,Ha	K:A/Q,H:Q
			2000				VL-12H20A20	H	VCL-12H20A20	H,Ha	Q
			630				VL-12□20B06	P,E,F,H	VCL-12□20B06	E,F,H	P,E,F,A/Q,H:Q
			1250				VL-12□20B13	P,E,F,H	VCL-12□20B13	E,F,H	P,E,F,A/Q,H:Q
			2000				VL-12□20B20	P,E,F,H	VCL-12□20B20	E,F,H	P,E,F,A/Q,H:Q
			630				VL-12□20F06	E,F	VCL-12□20F06	E,F	A/Q
			1250				VL-12□20F13	E,F	VCL-12□20F13	E,F	A/Q
	25		630				VL-12□25A(K)06	P,K,H	VCL-12□25A06	K,H,Ha	K:A/Q,H:Q
			1250				VL-12□25A(K)13	P,K,H	VCL-12□25A13	K,H,Ha	K:A/Q,H:Q
			2000				VL-12□25A(K)20	K,H	VCL-12□25A20	K,H,Ha	K:A/Q,H:Q
			630				VL-12□25B06	P,E,F,H	VCL-12□25B06	E,F,H	P,E,F,A/Q,H:Q
			1250				VL-12□25B13	P,E,F,H	VCL-12□25B13	E,F,H	P,E,F,A/Q,H:Q
	31.5		630				VL-12□25B20	P,E,F,H	VCL-12□25B20	E,F,H	P,E,F,A/Q,H:Q
			1250				VL-12□25F06	E,F	VCL-12□25F06	E,F	A/Q
			2000				VL-12□25F13	E,F	VCL-12□25F13	E,F	A/Q
			630				VL-12□32A06	P,H	VCL-12H32A06	H,Ha	Q
			1250				VL-12□32A(K)13	P,Gs,K,H	VCL-12□32A13	Gs,K,H,Ha	Gs,K:A/Q,H:Q
			2000				VL-12□32A(K)20	Gs,K,H	VCL-12□32A20	Gs,K,H,Ha	Gs,K:A/Q,H:Q
			630				VL-12□32B06	P,H	VCL-12H32B06	H	Q
			1250				VL-12□32B13	P,H	VCL-12H32B13	H	Q
17.5	20		2000				VL-12□32B20	P,H	VCL-12H32B20	H	Q
			630				VL-17H20A06	H	VCL-17H20A06	H	Q
			1250				VL-17H20A13	H	VCL-17H20A13	H	Q
			2000				VL-17H20A20	H	VCL-17H20A20	H	Q
			630				VL-17□20B06	P,E,F,H	VCL-17□20B06	E,F,H	P,E,F,A/Q,H:Q
			1250				VL-17□20B13	P,E,F,H	VCL-17□20B13	E,F,H	P,E,F,A/Q,H:Q
			2000				VL-17□20B20	P,E,F,H	VCL-17□20B20	E,F,H	P,E,F,A/Q,H:Q
			630				VL-17□20F06	E,F	VCL-17□20F06	E,F	A/Q
			1250				VL-17□20F13	E,F	VCL-17□20F13	E,F	A/Q
	25		630				VL-17H25A06	H	VCL-17H25A06	H	Q
			1250				VL-17H25A13	H	VCL-17H25A13	H	Q
			2000				VL-17H25A20	H	VCL-17H25A20	H	Q
			630				VL-17□25B06	P,E,F,H	VCL-17□25B06	E,F,H	P,E,F,A/Q,H:Q
			1250				VL-17□25B13	P,E,F,H	VCL-17□25B13	E,F,H	P,E,F,A/Q,H:Q
			2000				VL-17□25B20	P,E,F,H	VCL-17□25B20	E,F,H	P,E,F,A/Q,H:Q
	31.5		630				VL-17□25F06	E,F	VCL-17□25F06	E,F	A/Q
			1250				VL-17□25F13	E,F	VCL-17□25F13	E,F	A/Q
			2000				VL-17□32A06	P,H	VCL-17H32A06	H	Q
			630				VL-17□32A13	P,H	VCL-17H32A13	H	Q
			1250				VL-17□32A20	H	VCL-17H32A20	H	Q
			2500				VL-17□32B06	P,H	VCL-17H32B06	H	Q
			2500				VL-17□32B13	P,H	VCL-17H32B13	H	Q
			2500				VL-17□32B20	P,H	VCL-17H32B20	H	Q
			2500				VL-17□32B25	P,H	VCL-17H32B25	H	Q
			2500				VL-17□32D25	P,H	VCL-17H32D25	H	Q

Ur [kV]	Isc [kA]	Ir[A]					VCB		CRADLE		Connector											
		p=130	p=150	p=210	p=265	p=275	Type	Version	Type	Version												
24	12.5			630			VL-20□13B06	G,K,H	VCL-20□13B06	G,K,H	G,K:A/Q, H:Q											
				1250			VL-20□13B13	G,K,H	VCL-20□13B13	G,K,H	G,K:A/Q, H:Q											
					630		VL-20□13F06	P,E,F,G,K	VCL-20□13F06	E,F,G,K	A/Q											
					630		VL-20□13G06	E,F	VCL-20□13G06	E,F	A/Q											
					1250		VL-20□13F13	P,E,F,G,K	VCL-20□13F13	E,F,G,K	A/Q											
					1250		VL-20□13G13	E,F	VCL-20□13G13	E,F	A/Q											
						630	VL-20H13D06	H	VCL-20H13D06	H	Q											
						1250	VL-20H13D13	H	VCL-20H13D13	H	Q											
				630			VL-20□16B06	G,K,H	VCL-20□16B06	G,K,H	G,K:A/Q, H:Q											
				1250			VL-20□16B13	G,K,H	VCL-20□16B13	G,K,H	G,K:A/Q, H:Q											
25.8	12.5			630			VL-20□16F06	P,E,F,G,K	VCL-20□16F06	E,F,G,K	A/Q											
				630			VL-20□16G06	E,F	VCL-20□16G06	E,F	A/Q											
				1250			VL-20□16F13	P,E,F,G,K	VCL-20□16F13	E,F,G,K	A/Q											
				1250			VL-20□16G13	E,F	VCL-20□16G13	E,F	A/Q											
					630		VL-20H16D06	H	VCL-20H16D06	H	Q											
					1250		VL-20H16D13	H	VCL-20H16D13	H	Q											
				630			VL-20□25B06	G,K,H	VCL-20□25B06	G,K,H	G,A/Q, H:Q											
				1250			VL-20□25B13	G,K,H	VCL-20□25B13	G,K,H	G,A/Q, H:Q											
				2000			VL-20□25B20	G,H	VCL-20□25B20	G,H	G,A/Q, H:Q											
					630		VL-20□25F06	P,E,F,G,K	VCL-20□25F06	E,F,G,K	A/Q											
36	25			630			VL-20□25G06	E,F	VCL-20□25G06	E,F	A/Q											
				630			VL-20□25F13	P,E,F,G,K	VCL-20□25F13	E,F,G,K	A/Q											
				1250			VL-20□25G13	E,F	VCL-20□25G13	E,F	A/Q											
					2000		VL-20□25F20	P,E,F,K	VCL-20□25F20	E,F,K	A/Q											
					2000		VL-20□25G20	E,F	VCL-20□25G20	E,F	A/Q											
					630		VL-20H25D06	H	VCL-20H25D06	H	Q											
					1250		VL-20H25D13	H	VCL-20H25D13	H	Q											
					2000		VL-20H25D20	H	VCL-20H25D20	H	Q											
					2500		VL-20H25D25	H	VCL-20H25D25-AS	H	Q											
Note) 1. Ur = Rated voltage		2. Isc = Rated short-circuit current																				
3. Ir = Rated normal current		4. p = Phase distance																				
5. E,F and G types are cradles for MESG(Metal Enclosed Switchgear) and H type for MCGS(Metal Clad Switchgear)																						
6. For the partial replacement of 7.2kV 8/12.5kA VCB, in case of using the existing old type cradle and replacing breaker only, please order type B (Compatible with existing breaker). Compatibile busbars are required for fixed version.																						
To replace VCB fully(breaker and cradle) please order type A for breaker and compatible cradle B.																						

Note) 1. Ur = Rated voltage

2. Isc = Rated short-circuit current

3. Ir = Rated normal current

4. p = Phase distance

5. E,F and G types are cradles for MESG(Metal Enclosed Switchgear) and H type for MCGS(Metal Clad Switchgear)

6. For the partial replacement of 7.2kV 8/12.5kA VCB, in case of using the existing old type cradle and replacing breaker only, please order type B (Compatible with existing breaker). Compatibile busbars are required for fixed version.

To replace VCB fully(breaker and cradle) please order type A for breaker and compatible cradle B.

# Type of circuit breakers

## 7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

Ur [kV]	Isc [kA]	Ir[A]					VCB		CRADLE		Connector
		p=150	p=210	p=254	p=275	p=320	Type	Version	Type	Version	
7.2	31.5	1250					VH-06□32A13	P,E,F,G	VCH-06□32A13	E,F,G	A/Q
							LVB-06□-32L/12	P,E,F,G,G/T	LCL-06□-32D/12	E,F,G,G/T	
	2000	2000					VH-06□32A20	P,E,F,G	VCH-06□32A20	E,F,G	A/Q
							LVB-06□-32L/20	P,E,F,G,G/T	LCL-06□-32D/20	E,F,G,G/T	
		3150					VH-06□32B32	P,E,F,Fs,Gs,K,H	VCH-06□32B32	E,F,Fs,Gs,K,H	P,E,F,K:A/Q, Fs,Gs,H:Q
							LVB-06□-32L/30	P,E,F,G/T	LCL-06□-32D/30	E,F,G,G/T	
	40	1250	1250				VH-06□40A13	P,E,F,Fs,G,Gs,K,H	VCH-06□40A13	E,F,Fs,G,Gs,K,H,Ha	P,E,F,Fs,G, Gs,K:A/Q,H:Q
							LVB-06□-40L/12	P,E,F,G,G/T	LCL-06□-40D/12	E,F,G,G/T	
		2000	2000				VH-06□40A20	P,E,F,Fs,G,Gs,K,H	VCH-06□40A20	E,F,Fs,G,Gs,K,H,Ha	P,E,F,Fs,G, Gs,K:A/Q,H:Q
							LVB-06□-40L/20	P,E,F,G,G/T	LCL-06□-40D/20	E,F,G,G/T	
		3150					VH-06□40B32	P,E,F,Fs,G,Gs,K,H	VCH-06□40B32	E,F,Fs,G,Gs,K,H,Ha	P,E,F,G,K:A/Q/ Fs,Gs,H:Q
							LVB-06□-40L/30	P,E,F,G/T	LCL-06□-40D/30	E,F,G,G/T	
	50	3150					VH-06□40D32	K,H	VCH-06□40D32	K,H	K:A/Q,H:Q
							VH-06□40D40	P,K,H	VCH-06□40D40	K,Ha,Hb	
		4000				5000	VH-06H40L50	H	VCH-06Ha40L50	Ha	Q
							VH-06□50B13	P,H	VCH-06H50B13	H	Q
							VH-06□50B20	P,H	VCH-06H50B20	H	Q
	31.5	2000					VH-06□50D25	P,H	VCH-06H50D25	H	Q
							VH-06□50D32	P,H	VCH-06H50D32	H	Q
		3150					VH-06□50D40	P,K,H	VCH-06□50D40	K,Ha,Hb	Q
							VH-06H50L50	H	VCH-06Ha50L50	Ha	Q
							LVB-12G-32L/12-T2	G/T	LCL-12G-32D/12-T2	G/T	A/Q
12	31.5	1250	1250				LVB-12G-32L/20-T2	G/T	LCL-12G-32D/20-T2	G/T	A/Q
							VH-12□32B32	Gs,K,H	VCH-12□32B32	Gs,K,H	K:A/Q,Gs,H:Q
		3150					LVB-12G-32L/30-T2	G/T	LCL-12G-32D/30-T2	G/T	A/Q
							VH-12□40A(K)13	Gs,K,H	VCH-12□40A(K)13	Gs,K,H,Ha	Gs,K:A/Q,H:Q
	40	1250	1250				LVB-12G-40L/12-T2	G/T	LCL-12G-40D/12-T2	G/T	A/Q
							VH-12□40A(K)20	Gs,K,H	VCH-12□40A(K)20	Gs,K,H,Ha	K:A/Q,Gs,H:Q
		2000	2000				LVB-12G-40L/20-T2	G/T	LCL-12G-40D/20-T2	G/T	A/Q
							VH-12□40B13	K,H	VCH-12□40B13	K,H	Q
		3150					VH-12□40B20	K,H	VCH-12□40B20	K,H	Q
							VH-12□40B32	Gs,K,H	VCH-12□40B32	Gs,K,H,Ha	K:A/Q,Gs,H:Q
	50	3150					LVB-12G-40L/30-T2	G/T	LCL-12G-40D/30-T2	G/T	A/Q
							VH-12H40D32	H	VCH-12H40D32	H	Q
		4000				3150	VH-12H40D40	P,K,H	VCH-12□40D40	K,Ha,Hb	Q
						4000	VH-12H40L50	H	VCH-12Ha40L50	Ha	Q
		50					VH-12H50L50	H	VCH-12Ha50L50	Ha	Q
							VH-12□50B13	P,H	VCH-12H50B13	H	Q
							VH-12□50B20	P,H	VCH-12H50B20	H	Q
							VH-12□50D25	P,H	VCH-12H50D25	H	Q
							VH-12□50D32	P,H	VCH-12H50D32	H	Q
17.5	31.5	3150					VH-12□50D40	P,K,H	VCH-12□50D40	K,Ha,Hb	Q
							VH-12H50L50	H	VCH-12Ha50L50	Ha	Q
	40	3150					VH-17H32B32	H	VCH-17H32B32	H,Ha	Q
							VH-17H32D32	H	VCH-17H32D32	H	Q
		3150					VH-17□40B13	K,H	VCH-17□40B13	K,H	K:A/Q,H:Q
							VH-17□40B20	K,H	VCH-17□40B20	K,H	K:A/Q,H:Q
							VH-17H40B32	H	VCH-17H40B32	H,Ha	Q
		3150				3150	VH-17K40C32	K	VCH-17K40C32	K	A/Q
						3150	VH-17H40D32	H	VCH-17H40D32	H	Q
		4000				4000	VH-17□40D40	P,K,H	VCH-17□40D40	Ha,HB	Q

Ur [kV]	Isc [kA]	Ir[A]				VCB		CRADLE		Connector
		p=150	p=210	p=275	p=300	Type	Version	Type	Version	
17.5	50	1250			VH-17□50B13	P,H	VCH-17H50B13	H	Q	
					VH-17□50B20	P,H	VCH-17H50B20	H	Q	
		2500			VH-17□50D25	P,H	VCH-17H50D25	H	Q	
					VH-17□50D32	P,H	VCH-17H50D32	H	Q	
					VH-17□50D40	P,H	VCH-17□50D40	Ha,Hb	Q	
		25		2500	VH-20□25D25	P,H	VCH-20H25D25	H	Q	
24	31.5	1250			VH-20□32B13	P,H	VCH-20H32B13	H	Q	
					VH-20□32B20	P,H	VCH-20H32B20	H	Q	
					VH-20□32D13	P,H	VCH-20H32D13	H	Q	
		2000			VH-20□32D20	P,H	VCH-20H32D20	H	Q	
					VH-20□32D32	P,H	VCH-20H32D32	H	Q	
					VH-20□40B13	P,H	VCH-20H40B13	H	Q	
	40	1250			VH-20□40B20	P,H	VCH-20H40B20	H	Q	
					VH-20□40D13	P,H	VCH-20H40D13	H	Q	
		2000			VH-20□40D20	P,H	VCH-20H40D20	H	Q	
					VH-20□40D32	P,H	VCH-20H40D32	H	Q	
25.8	25		2500	VH-25□25D25	P,H	VCH-25H25D25	H	Q		
	31.5	1250			VH-25□32B13	P,H	VCH-25H32B13	H	Q	
					VH-25□32B20	P,H	VCH-25H32B20	H	Q	
		2000			VH-25□32D13	P,H	VCH-25H32D13	H	Q	
					VH-25□32D20	P,H	VCH-25H32D20	H	Q	
					VH-25□32D32	P,H	VCH-25H32D32	H	Q	
	40	1250			VH-25□40B13	P,H	VCH-25H40B13	H	Q	
					VH-25□40B20	P,H	VCH-25H40B20	H	Q	
		2000			VH-25□40D13	P,H	VCH-25H40D13	H	Q	
					VH-25□40D20	P,H	VCH-25H40D20	H	Q	
					VH-25□40D32	P,H	VCH-25H40D32	H	Q	
36	25	1250			VH-36□25E13	P,H	VCH-36H25E13	H	Q	
				VH-36□25E20	P,H	VCH-36H25E20	H	Q		
				VH-36□25E32	P,H	VCH-36H25E32	H	Q		
	31.5	1250			VH-36□32E13	P,H	VCH-36H32E13	H	Q	
					VH-36□32E20	P,H	VCH-36H32E20	H	Q	
					VH-36□32E32	P,H	VCH-36H32E32	H	Q	
	40	1250			VH-36□40E13	P,H	VCH-36H40E13	H	Q	
					VH-36□40E20	P,H	VCH-36H40E20	H	Q	
					VH-36□40E32	P,H	VCH-36H40E32	H	Q	

Note) 1. Ur = Rated voltage

2. Isc = Rated short-circuit current

3. Ir = Rated normal current

4. p = Phase distance

5. H type is MCG style drawable type with a box type cradle for CB compartment construction.

6. G/T types are MCG style drawable types with a cradle for built-in in the switchgear, not a box type. (K of VCL type name indicates 4000A)

Example of G/T type : LVB-06G-32L/12-T2, LCL-06G-32D/12-T2

7. G/T types use LVB and LCL names.

8. E, F and G types provide cradles for MESG(Metal Enclosed Switchgear) and H, G/T types for MCSG(Metal Clad Switchgear).

9. In case of 7.2/12kV, 31.5kA/40kA H type: Please contact us.

# Ratings - 7.2kV 8/12.5kA 400/630A

## VL-06



Item	VL-06□08□04		VL-06□13□06
Rated voltage	Ur (kV)	7.2	
Rated normal current	Ir (A)	400	630
Rated frequency	fr (Hz)		50/60
Rated short-circuit current	Isc (kA)	8	12.5
Rated short-time withstand current	Ik/tk (kA/s)	8/3	12.5/3
Rated short-circuit breaking capacity	(MVA)	100	160
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)	
Rated breaking time	(cycle)	3	
Rated withstand voltage	Power frequency (1 min) Impulse ( $1.2 \times 50\mu s$ )	Ud (kV) Up (kV)	20 60
Rated operating sequence		O-0.3s-CO-15s-CO	
Control voltage	Closing coil Trip coil	(V)	AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48 AC/DC 100~130, AC/DC 200~250, DC 125, DC 24~30, DC 48~60, AC 48
Auxiliary contacts			2a2b, 4a4b, 6a6b
Rated opening time		(sec)	≤ 0.04
No-load closing time		(sec)	≤ 0.06
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 1) C2
Installation version	Fixed Drawout		P type E, F, G type (for MESG)
Phase distance		(mm)	130
Weight	Breaker (E, F, G type) Cradle (E, F, G type)	(kg)	37 18, 25, 32
Dimensions	Breaker (E, F, G type) Cradle (E, F, G type)		Page 97~98 Page 98~99
Standards			IEC 62271-100, JEC 2300/JIS C 4603, V-check(KESCO)

## VL-06/12/17



Item		VL-06□20/25□06/13/20			VL-12□20/25□06/13/20			VL-17□20/25□06/13/20					
Rated voltage	Ur (kV)	7.2			12			17.5					
Rated normal current	Ir (A)	630	1250	2000	630	1250	2000	630	1250	2000			
Rated frequency	fr (Hz)	50/60											
Rated short-circuit current	Isc (kA)	20, 25											
Rated short-time withstand current	Ik/tk (kA/s)	20/3, 25/3											
Rated short-circuit breaking capacity	(MVA)	250/310		410/520		600/750							
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)											
Rated breaking time	(cycle)	3											
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20		28		38						
	Impulse (1.2×50μs)	Up (kV)	60		75		95						
Rated operating sequence										O-0.3s-CO-15s-CO			
Control voltage	Closing coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250										
	Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250										
Auxiliary contacts										4a4b, 10a10b			
Rated opening time		(sec)	≤ 0.04										
No-load closing time		(sec)	≤ 0.06										
Type test class	Mechanical				M2								
	Electrical				E2 (List 3)								
	Capacitive current switching				C2								
Installation version *	Fixed				P type								
Drawout	E, F, G type (for MESG), H type (for MCGS)			E, F type (for MESG), H type (for MCGS)									
Phase distance **	(mm)	150			150 (210)			150 (210)					
Weight	Breaker (E, F, G, K type)	(kg)	100	100	130	115 (120)	115 (120)	130 (140)	115 (120)	115 (120)	130 (140)		
	Cradle (E, F, G, K type)	(kg)	170	170	180	170 (200)	115 (120)	180 (200)	170 (200)	170 (200)	180 (200)		
Dimensions	Breaker (P, E, F, G, K, H type)	Page 100~111			Page 100~111			Page 100~111					
	Cradle (E, F, G, K type)	Page 100~111			Page 100~111			Page 100~111					
	Cradle (K, H type)	Page 100~111			Page 100~111			Page 100~111					
Standards	IEC 62271-100, KERI/KEMA, V-check(KESCO)												

\* H type is a box type cradle with CB compartment style structure.

\*\* ( ) displays option of phase distance.

# Ratings - 7.2/12/17.5kV 31.5kA 630/1250/2000/2500A

**VL-06/12/17**



Item		VL-06□32□06/13/20			VL-12□32□06/13/20/25				VL-17□32□06/13/20/25												
Rated voltage	Ur (kV)	7.2			12				17.5												
Rated normal current	Ir (A)	630	1250	2000	630	1250	2000	2500	630	1250	2000	2500									
Rated frequency	fr (Hz)				50/60																
Rated short-circuit current	Isc (kA)				31.5																
Rated short-time withstand current	Ik/tk (kA/s)				31.5/3(4 <small>Note1</small> )																
Rated short-circuit breaking capacity	(MVA)	393		655		955															
Rated short-circuit making current	Ip (kA)				2.5×Isc (50Hz)/2.6×Isc (60Hz)																
Rated breaking time	(cycle)				3																
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV)	20		28		38														
		Up (kV)	60		75		95														
Rated operating sequence		O-0.3s-CO-15s-CO																			
Control voltage	Closing coil Trip coil	(V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250																		
Auxiliary contacts		4a4b, 10a10b																			
Rated opening time		(sec)	≤ 0.04																		
No-load closing time		(sec)	≤ 0.06																		
Type test class	Mechanical	M2																			
	Electrical	E2 (List 3)																			
	Capacitive current switching	C2																			
Installation version *	Fixed	P type			P type				P type												
	Drawout	H type (for MCGS)	E, F, Fs, G, Gs, K type (for MESG)	H type (for MCGS)	H type (for MCGS)	Gs, K type (for MESG)	H type (for MCGS)	H type (for MCGS)	H type (for MCGS)												
Phase distance **	(mm)	150			150 (210)			210 (275)	150 (210)			210 (275)									
Weight	Breaker (H type)	(kg)	100	100	130	115/120	115/120	130/140	160/175	115/120	115/120	130/140	160/175								
	Cradle (H type)	(kg)	170	170	200	170/200	170/200	170/200	260/290	170/200	170/200	170/200	260/290								
	Breaker (P, E, F, G, K type)	(kg)	85	85	100	85/100	85/100	100/115	120/135	85/100	85/100	100/115	120/135								
Dimensions	Breaker (P, E, F, Fs, G, Gs, K, H type)	Page 112~128			Page 129~161				Page 129~161												
	Cradle (E, F, Fs, G, Gs, K, H type)	Page 112~128			Page 129~161				Page 129~161												
Standards	IEC 62271-100, KERI, V-check(KESCO)																				

\* H type is a box type cradle with CB compartment style structure.

\*\* ( ) displays option of phase distance.

Note1) For Icw 4s, please contact us..

## VL-20/25



Item	VL-20, 25□13□06/13	VL-20, 25□16□06/13	VL-20, 25□25□06/13/20/25				
Rated voltage	Ur (kV)	24/25.8					
Rated normal current	Ir (A)	630      1250      630      1250      630      1250      2000      2500					
Rated frequency	fr (Hz)		50/60				
Rated short-circuit current	Isc (kA)	12.5	16	25			
Rated short-time withstand current	Ik/tk (kA/s)	12.5/3 <small>Note2</small>	16/3 <small>Note2</small>	25/3 <small>Note2</small>			
Rated short-circuit breaking capacity	(MVA)	520/560	665/715	1040/1120			
Rated short-circuit making current	Ip (kA)		2.5×Isc (50Hz)/2.6×Isc (60Hz)				
Rated breaking time	(cycle)		3				
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	50/60 125				
Rated operating sequence			O-0.3s-CO-15s-CO				
Control voltage	Closing coil Trip coil	(V) (V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250 DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250				
Auxiliary contacts			4a4b, 10a10b				
Rated opening time	(sec)		≤ 0.04				
No-load closing time	(sec)		≤ 0.06				
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2				
Installation version *	Fixed Drawout		P type E,F,G type (for MESG) / K, H type (for MCGS)			-	H type (for MCGS)
Phase distance **	(mm)		210/265/275			275	
Weight	Breaker (H type) Cradle (H type) Breaker (P, E, F, G, K type)	(kg) (kg) (kg)	120 (130) 200 (220) 110      115	130 (140) 120		150 (160) 135	-
Dimensions	Breaker (P, E, F, G, K, H type) Cradle (E, F, G, K type) Cradle (H type)		Page 162~171 Page 183~185 Page 186~190	Page 172~178 Page 183~185 Page 186~190		Page 178~182 Page 183~185 Page 186~190	
Standards				IEC 62271-100, KERI, V-check(KESCO)			

\* H type is a box type cradle with CB compartment style structure.

\*\* ( ) displays option of phase distance.

Note 1) 24/25.8kV 25kA 2000A(Phase distance 210mm): 60Hz available only

2) For lcw 4s, please contact us..

# Ratings - 36kV 25kA 630/1250/2000/2500A

## VL-36



Item		VL-36□25□06	VL-36□25□13	VL-36□25□20	VL-36□25□25
Rated voltage	Ur (kV)		36		
Rated normal current	Ir (A)	630	1250	2000	2500
Rated frequency	fr (Hz)		50/60		
Rated short-circuit current	Isc (kA)		25		
Rated short-time withstand current	Ik/tk (kA/s)		25/3(4 <small>Note1</small> )		
Rated short-circuit breaking capacity	(MVA)		1560		
Rated short-circuit making current	Ip (kA)		62.5/65		
Rated breaking time	(cycle)		3		
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	70 170		
Rated operating sequence			O-0.3s-CO-15s-CO		
Control voltage	Closing coil Trip coil	(V) (V)	DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250 DC 24~30, DC 48~60, DC 110, DC 125, DC 220~250, AC 48, AC 100~130, AC 220~250		
Auxiliary contacts			4a4b, 10a10b		
Rated opening time		(sec)	≤ 0.04		
No-load closing time		(sec)	≤ 0.07		
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2		
Installation version	Fixed Drawout		P type H type (for MCSG)		
Phase distance		(mm)	275		
Weight	Breaker (H type) Cradle (H type)	(kg) (kg)	260 440	260 440	280 450
Dimensions	Breaker (H type) Cradle (H type)			Page 191~196 Page 191~196	
Standards				IEC 62271-100	

Note1) For Icw 4s, please contact us.

## LVB-06/12



Item	LVB-06□-32□32	LVB-06□-40□12, 20, 32			LVB-12□-32□32	LVB-12□-40□12, 20, 32								
Rated voltage	Ur (kV)	7.2	7.2			12	12							
Rated normal current	Ir (A)	3150 *	1250	2000	3150 *	3150 *	1250	2000						
Rated frequency	fr (Hz)	50/60												
Rated short-circuit current	Isc (kA)	31.5	40		31.5	40								
Rated short-time withstand current	Ik/tk (kA/s)	31.5/3	40/3		31.5/3	40/3								
Rated short-circuit breaking capacity	(MVA)	393	499		655	831								
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)												
Rated breaking time	(cycle)	3												
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60		28	75								
Rated operating sequence	O-0.3s-CO-3min-CO													
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220								
Auxiliary contacts	4a4b, 10a10b													
Rated opening time	(sec)	≤ 0.04												
No-load closing time	(sec)	≤ 0.06												
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List 3) C2												
Installation version	Fixed Drawout *	P type E,F,G type (for MESG), MCSG Cradle			-									
Phase distance	(mm)	210	150		210	210	150							
Weight	Breaker (MESG, MCSG) Cradle (MESG, MCSG)	(kg)	210, 220 135, 160	135, 160 210, 220	210, 220 135, 155	220 155	164 110	165 117						
Dimensions	reaker (MESG, MCSG) Cradle (MESG, MCSG)	Page 201~202 Page 203~204		Page 197~198 Page 199~200	Page 201~202 Page 203~204	Page 201~202 Page 203~204	Page 197~198 Page 199~200	Page 201~202 Page 203~204						
Standards	IEC 62271-100													

\* MCSG style drawable type provide a cradle for building in the switchgear, not a box type for CB compartment. Ordering type is LVB.

Note 1) H type that is a box type cradle for enabling a CB compartment in MCSG is under development. Consult us for ordering.

2) Some LVB is the ordering name of the switchboard for export

# Ratings - 7.2/12/17.5kV 40kA 1250/2000A

## VH-06/12/17



Item		VH-06/12□40□13/20				VH-06/12/17□40□13/20																						
Rated voltage	Ur (kV)	7.2		12		7.2		12		17.5																		
Rated normal current	Ir (A)	1250	2000	1250	2000	1250	2000	1250	2000	1250	2000																	
Rated frequency	fr (Hz)	50/60																										
Rated short-circuit current	Isc (kA)	40																										
Rated short-time withstand current	Ik/tk (kA/s)	40/4																										
Rated short-circuit breaking capacity	(MVA)	499		831		499		831		1212																		
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)																										
Rated breaking time	(cycle)	3																										
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60	28 (42) 75	20 60	28 (42) 75	38 95																					
Rated operating sequence	O-0.3s-CO-3min-CO				O-0.3s-CO-15s-CO																							
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220 DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																									
Auxiliary contacts	4a4b, 10a10b																											
Rated opening time	(sec)	≤ 0.04																										
No-load closing time	(sec)	≤ 0.06																										
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List 3) C2																										
Installation version	Drawout	Fs, Gs, K, H type				K, H type																						
Phase distance	(mm)	150				210																						
Weight	Breaker (H type) Cradle (H type)	(kg)	165 205				215 226																					
Dimensions	Breaker (Fs, Gs, K, H type) Cradle (Fs, Gs, K, H type)	Page 208~223 Page 208~223				Page 208~223 Page 208~223																						
Standards	IEC 62271-100																											

## VH-06/12/17



Item		VH-06/12/17 □ 32/40 □ 32			
Rated voltage	Ur (kV)	7.2	12	17.5	
Rated normal current	Ir (A)		3150		
Rated frequency	fr (Hz)		50/60		
Rated short-circuit current	Isc (kA)		31.5/40		
Rated short-time withstand current	Ik/tk (kA/s)		40/4		
Rated short-circuit breaking capacity	(MVA)	393/499	655/831	955/1212	
Rated short-circuit making current	Ip (kA)		2.5 × Isc (50Hz)/2.6 × Isc (60Hz)		
Rated breaking time	(cycle)		3		
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	20 60	28 (42) 75	38 95
Rated operating sequence			O-0.3s-CO-15s-CO		
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220	
Auxiliary contacts			4a4b, 10a10b		
Rated opening time		(sec)	≤ 0.04		
No-load closing time		(sec)	≤ 0.06		
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2		
Installation version	Drawout	Fs, Gs, K, H type	Gs, K, H type	K, H type	K type
Phase distance	(mm)	210	210	210	254
Weight	Breaker (H type) Cradle (H type)	(kg)	240 235	240 235	280 250
Dimensions	Breaker (H type) Cradle (H type)		Page 208~223 Page 208~223		
Standards			IEC 62271-100		

# Ratings - 7.2/12/17.5kV 50kA 1250/2000/2500/3150A

## VH-06/12/17



Item		VH-06□50□13/20/25/32				VH-12□50□13/20/25/32				VH-17□50□13/20/25/32														
Rated voltage	Ur (kV)	7.2				12				17.5														
Rated normal current	Ir (A)	1250	2000	2500	3150	1250	2000	2500	3150	1250	2000	2500	3150											
Rated frequency	fr (Hz)	50/60																						
Rated short-circuit current	Isc (kA)	50																						
Rated short-time withstand current	Ik/tk (kA/s)	50/3																						
Rated short-circuit breaking capacity	(MVA)	623			2.5×Isc (50Hz)/2.6×Isc (60Hz)	1039			1515															
Rated short-circuit making current	Ip (kA)																							
Rated breaking time	(cycle)	3																						
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV)	20			28 (42) <small>Note1</small>			38															
	Up (kV)		60			75				95														
Rated operating sequence	O-0.3s-CO-15s-CO / O-0.3s-CO-3min-CO																							
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220				DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220																	
Auxiliary contacts	4a4b, 10a10b																							
Rated opening time	(sec)	≤ 0.04																						
No-load closing time	(sec)	≤ 0.06																						
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List 3) C2																						
Installation version *	Fixed Drawout	P type H type (for MCSG)																						
Phase distance	(mm)	210	275		210	275		210	275		210	275												
Weight	Breaker (H type) Cradle (H type)	(kg)	230	287	290	230	287	290	230	287	290	230	287	290										
Dimensions	Breaker (H type) Cradle (H type)	Page 224		Page 226		Page 224	Page 226		Page 224	Page 226		Page 224	Page 226											
		Page 225		Page 227		Page 225	Page 227		Page 225	Page 227		Page 225	Page 227											
Standards	IEC 62271-100, KERI/KEMA, V-check(KESCO)																							

\* H type is a box type cradle with CB compartment style structure.

Note1) Contact us.

## VH-06/12/17



Item		VH-06/12/17□40□40			VH-06/12/17□50□40		
Rated voltage	Ur (kV)	7.2	12	17.5	7.2	12	17.5
Rated normal current	Ir (A)			4000			
Rated frequency	fr (Hz)			50/60			
Rated short-circuit current	Isc (kA)		40			50	
Rated short-time withstand current	Ik/tk (kA/s)		40/4			50/4	
Rated short-circuit breaking capacity	(MVA)	499	831	1212	624	1040	1515
Rated short-circuit making current	Ip (kA)		104			130	
Rated breaking time	(cycle)			3			
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	20	28(42)	38	20	28(42)
	Impulse (1.2×50μs)	Up (kV)	60	75	95	60	75
Rated operating sequence				O-0.3s-CO-15s-CO			
Control voltage	Closing coil	(V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250			
	Trip coil	(V)		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250			
Auxiliary contacts				4a4b, 10a10b			
Rated opening time		(sec)		≤ 0.04			
No-load closing time		(sec)		≤ 0.06			
Type test class	Mechanical			M2			
	Electrical			E2 (List 1)			
	Capacitive current switching			C2			
Installation version	Fixed	-	-	P type	-	-	P type
	Drawout	H type	H type	H type	H type	H type	H type
Phase distance		(mm)		275			
Weight	Breaker (H type)	(kg)		395			
	Cradle (H type)	(kg)		200			
Dimensions	Breaker (Fs, Gs, K, H type)			Page 228~233			
	Cradle (Fs, Gs, K, H type)			Page 228~233			
Standards				IEC 62271-100			

# Ratings - 7.2/12kV 40/50kA 5000A

## VH-06/12



Item	VH-06H40, 50L50	VH-12H40, 50L50
Rated voltage	Ur (kV)	7.2
Rated normal current	Ir (A)	5000
Rated frequency	fr (Hz)	50/60
Rated short-circuit current	Isc (kA)	40/50
Rated short-time withstand current	Ik/tk (kA/s)	50/4
Rated short-circuit breaking capacity	(MVA)	624
Rated short-circuit making current	Ip (kA)	130
Rated breaking time	(cycle)	3
Rated withstand voltage	Power frequency (1 min) Impulse ( $1.2 \times 50\mu s$ )	Ud (kV) Up (kV)
	20 60	20 75
Rated operating sequence		O-0.3s-CO-15s-CO
Control voltage	Closing coil Trip coil	(V) (V)
		DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250 DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220~250
Auxiliary contacts		4a4b, 10a10b
Rated opening time	(sec)	$\leq 0.04$
No-load closing time	(sec)	$\leq 0.06$
Type test class	Mechanical Electrical Capacitive current switching	M2 E2 (List 1) C2
Installation version	Drawout	H type (for MCSG)
Phase distance	(mm)	320
Weight	Breaker (H type) Cradle (H type)	(kg) (kg)
		430 200
Dimensions	Breaker (H type) Cradle (H type)	Page 232~233 Page 232~233
Standards		IEC 62271-100

## VH-20/25



Item	VH-20,25□25□25	VH-20,25□32□13/20/32	VH-20,25□40□13/20/32
Rated voltage	Ur (kV)	24/25.8	
Rated normal current	Ir (A)	2500	1250 2000 3150
Rated frequency ***	fr (Hz)	50/60	60 50/60
Rated short-circuit current	Isc (kA)	25	31.5 40
Rated short-time withstand current	Ik/tk (kA/s)	25/3	31.5/3 40/3
Rated short-circuit breaking capacity	(MVA)	1039/1117	1309/1407 1662/1787
Rated short-circuit making current	Ip (kA)	2.5×Isc (50Hz)/2.6×Isc (60Hz)	2.6×Isc (60Hz) 2.5×Isc (50Hz)/2.6×Isc (60Hz)
Rated breaking time	(cycle)		3
Rated withstand voltage	Power frequency (1 min) Impulse (1.2×50μs)	Ud (kV) Up (kV)	50 (65) <small>Note1</small> 125
Rated operating sequence ****			0-0.3s-CO-15s-CO / 0-0.3s-CO-3min-CO
Control voltage	Closing coil Trip coil	(V)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220 DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220
Auxiliary contacts			4a4b, 10a10b
Rated opening time		(sec)	≤ 0.04
No-load closing time		(sec)	≤ 0.06
Type test class	Mechanical Electrical Capacitive current switching		M2 E2 (List 3) C2
Installation version *	Fixed Drawout		P type H type (for MCSG)
Phase distance **	(mm)	275	210 (275) 210 (275) 275 210 (275) 210 (275) 275
Weight	Breaker (H type) Cradle (H type)	(kg)	295 256 (273) 256 (273) 318 256 (273) 256 (273) 318 316 257 (284) 257 (284) 316 257 (284) 257 (284) 316
Dimensions	Breaker (H type) Cradle (H type)		Page 234 Page 236~239 Page 241 Page 236~239 Page 241 Page 235 Page 237, 240 Page 242 Page 237, 240 Page 242
Standards			IEC 62271-100, KERI/KEMA, V-check(KESCO)

\* H type is a box type cradle with CB compartment style structure.

\*\* ( ) displays option of phase distance.

\*\*\* Rated frequency(fr) 50Hz is certified only to 24kV.

\*\*\*\* Rated operating sequence O-0.3s-CO-15s-CO is certified only to 24kV 40kA.

Note1) Contact us.

# Ratings - 36kV 25/31.5/40kA 1250/2000/3150A

## VH-36



Item		VH-36 □ 25 □ 13/20/32			VH-36 □ 32 □ 13/20/32			VH-36 □ 40 □ 13/20/32				
Rated voltage	Ur (kV)	36			50/60			40				
Rated normal current	Ir (A)	1250	2000	3150	1250	2000	3150	1250	2000	3150		
Rated frequency	fr (Hz)	25			31.5			40				
Rated short-circuit current	Isc (kA)	25/3			31.5/3			40/3				
Rated short-time withstand current	Ik/tk (kA/s)	1559			1964			2494				
Rated short-circuit breaking capacity	(MVA)	2.5 × Isc (50Hz)/2.6 × Isc (60Hz)			3			0.3s-CO-3min-CO				
Rated breaking time	(cycle)	70 (95) <small>Note1</small>			170			DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220				
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			DC 48, DC 110, DC 125, DC 220~250, AC 48, AC 110, AC 220			Impulse (1.2×50μs) Up (kV)			
Rated operating sequence												
Control voltage	Closing coil	(V)	4a4b, 10a10b									
	Trip coil	(V)										
Auxiliary contacts												
Rated opening time	(sec)			≤ 0.04								
No-load closing time	(sec)			≤ 0.06								
Type test class	Mechanical	M2			E2 (List 3)			C2				
Installation version *	Fixed	P type			H type (for MCSG)							
Drawout												
Phase distance	(mm)			300								
Weight	Breaker (H type)	(kg)	400	490	400	490	400	490	400	490		
	Cradle (H type)	(kg)	700	750	700	750	700	750	700	750		
Dimensions	Breaker (H type)	Page 243		Page 245	Page 243	Page 245	Page 243	Page 245	Page 244	Page 245		
	Cradle (H type)	Page 244		Page 246	Page 244	Page 246	Page 244	Page 246	Page 244	Page 245		
Standards	IEC 62271-100, KERI/KEMA, V-check(KESCO)											

\* H type is a box type cradle with CB compartment style structure.

Note1) Contact us.

# Accessories

Susol VCB



Mounting Position	Type	Accessory	Supplied as			Remarks	page
			VL: 7.2kV 8/12.5kA	VL: 20/25kA	VH		
Breaker (Internal)	M	Motor	●	●	●	Attached at the factory	61
	CC	Closing Coil	●	●	●	Attached at the factory	62
	TC	Trip Coil	●	●	●	Attached at the factory	63
	A1	Secondary Trip Coil	Option	Option	Option	Attached at the factory	64
	A2	Secondary Trip Coil with TCM Contact	-	Option	Option	Attached at the factory	64, 80
	T9	Current Trip Coil	Option	Option	-	Attached at the factory	65
		Auxiliary Contact 2a2b	●	-	-	Attached at the factory	66
	SA (SQ)	Auxiliary Contact 4a4b	Option	●	●		
		Auxiliary Contact 6a6b	Option	-	-		
		Auxiliary Contact 10a10b	-	Option	Option		
	U	Under Voltage Trip Coil	Option	Option	Option	Attached at the factory	67
	A3	Position S/W(Test: 1a1b, Service: 2b)	Option	Option	Option	Attached at the factory	68
	A4	Position S/W(Test: 2a, Service: 2a)	Option	Option	Option	Attached at the factory	68
	A5	Position S/W(Test: 1a1b, Service: 1a1b)	Option	Option	Option	Attached at the factory	68
	A6	Latch Checking Switch	-	-	Option	Attached at the factory	69
	C	Counter	●	●	●	Attached at the factory	69
	A7	Keylock	Option	Option	Option	Attached at the factory	70
	A8	Button Padlock	Option	Option	Option	Attached at the factory	71
	A9	Button cover	Option	Option	Option	Attached at the factory	72
	AA	Lead Wire: A/Q type connector	Option	Option	Option	Attached at the factory	73
	AB	Plug/Terminal for Lead Wire	Option	Option	Option	Attached at the factory	73
	AC	Plug Interlock	-	Option	Option	Attached at the factory	77
	AD	Padlock (H type)	-	Option	Option	Attached at the factory	77
	AE	MOC(Mechanical Operated Cell Switch)	-	Option	Option	Attached at the factory	78
	AF	Locking Magnet	-	Option	Option	Attached at the factory	79
	AJ	Door Interlock	-	Option	Option	Attached at the factory	89
	AO	Lead Wire: A type connector (Special Color: Blue)	Option	Option	-	Attached at the factory	91
		Trip Coil Monitoring Contact	●	●	●	Attached at the factory	80
Breaker (External)	CTD1	Condenser Trip Device(AC110V)	Option	Option	Option	-	82
	CTD2	Condenser Trip Device(AC220V)	Option	Option	Option	-	82
	UDC1	UVT Time Delay Controller(AD110V)	Option	Option	Option	-	83
	UDC2	UVT Time Delay Controller(AD220V)	Option	Option	Option	-	83
	UDC3	UVT Time Delay Controller(AD48V)	Option	Option	Option	-	83
	CTU	Coil Test Unit	Option	Option	Option	-	81
	TM	Temperature Monitoring	-	Option	Option	-	84

\* ●: Basic Installation

# Accessories





Mounting Position	Type	Accessory	Supplied as			Remarks	page
			VL: 7.2kV 8/12.5kA	VL: 20/25kA	VH		
Cradle	A1	ES(Earthing Switch)\ without Option	-	Option	Option	Attached at the factory	85
	A2	ES(Earthing Switch) with Position Switch(2a2b)	-	Option	Option	Attached at the factory	85
	A4	ES(Earthing Switch) with Position Switch(6a6b)	-	Option	Option	Attached at the factory	85
	A5	Keylock for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A6	Locking magnet(DC110V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A7	Locking magnet(DC220V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A8	Locking magnet(DC125V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	A9	Locking magnet(DC24V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AA	Locking magnet(DC48V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AB	Locking magnet(AC48V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AC	Locking magnet(AC110V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AD	Locking magnet(AC220V) for ES(Earthing Switch)	-	Option	Option	Attached at the factory	86
	AE	Shutter padlock	-	Option	Option	Attached at the factory	87
	AF	TOC(Truck Operated Cell Switch)	-	Option	Option	Attached at the factory	87
	AG	MOC(Mechanical Operated Cell Switch)	-	Option	Option	Attached at the factory	86
	AH	Door	-	Option	Option	Attached at the factory	88
	AJ	Door Interlock	-	Option	Option	Attached at the factory	89
	AK	Door Emergency Push Button	-	Option	Option	Attached at the factory	89
	AL	Temperature Sensor	-	Option	Option	Attached at the factory	90
	AM	Type H Lead Wire 4a4b (Normal cable)	-	Option	Option	Attached at the factory	91
	AN	Type H Lead Wire 10a10b (Normal cable)	-	Option	Option	Attached at the factory	91
	AO	Type H Lead Wire 4a4b) (Flame retardant cable)	-	Option	Option	Attached at the factory	91
		Door padlock	-	Option	Option	Attached at the factory	91

## Motor: M

Installed inside of a breaker as standard


### VL type

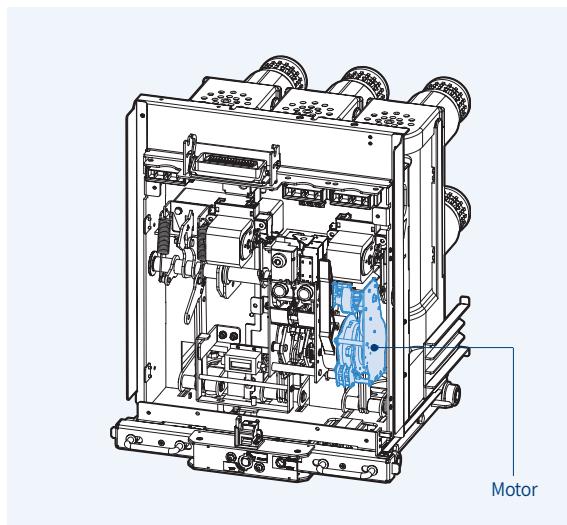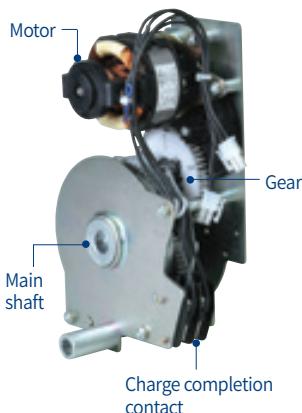

- Charge the closing spring of a circuit breaker by the external power source. When the charging is complete, control power of the motor will be "OFF" by the built-in Limit S/W. Without the external power source, charge manually.

- Operating voltage range (IEC 60947)  
85%~110%Vn

### VH type

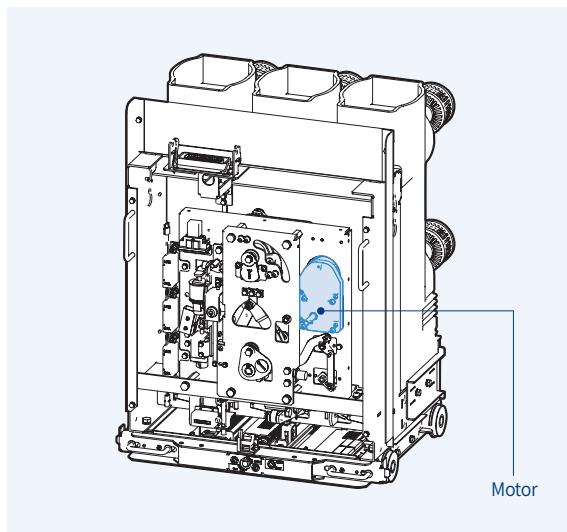

Item	VH Type							
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V	
Load current (A)	≤ 6	≤ 3	≤ 3	≤ 2.6	≤ 6	≤ 3	≤ 2.6	
Starting current (A)	5 times of load current							
Charge time	Within 12 sec.							


Note) Rated operation and control voltage range, see page 65.

# Accessories

## Closing Coil: C

Installed inside of a breaker as standard

### VL type

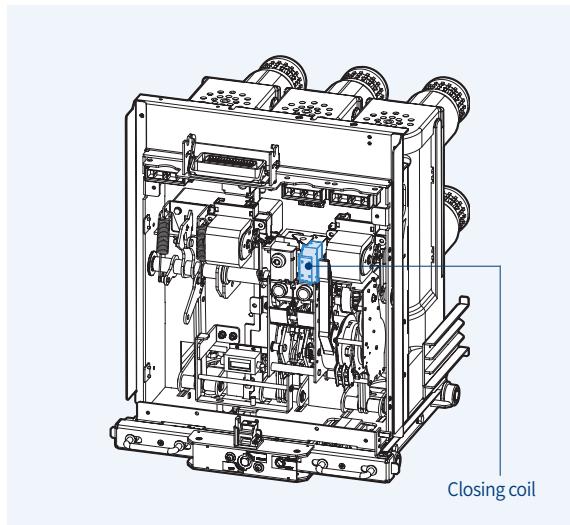


- It is a control device which closes a circuit breaker, when applying voltage continuously or instantaneously over 200ms to the coil control terminals.

Item	VL Type							
Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130V	AC 200~250V
Power consumption (inrush, W)								
Power consumption (steady, W)								
Rated current (A)	≤ 10	≤ 5	≤ 4	≤ 2			-	

Note) Rated operation and control voltage range, see page 65.

### VH type

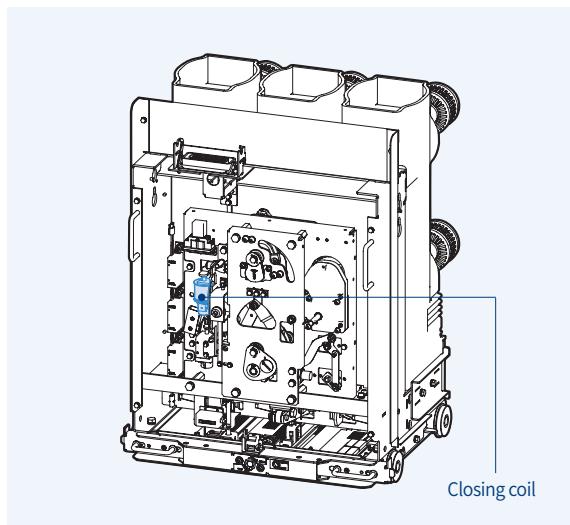

- It is a control device which closes a circuit breaker, when applying voltage continuously about 45ms to the coil control terminals. Electrical pumping preventing circuit is built in.


Item	VH Type							
Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V	
Rated current (A)	≤ 8	≤ 3	≤ 3.5	≤ 2.5	≤ 8	≤ 3	≤ 2.5	

Note) Rated operation and control voltage range, see page 65.

## Trip Coil: T

Installed inside of a breaker as standard

### VL type

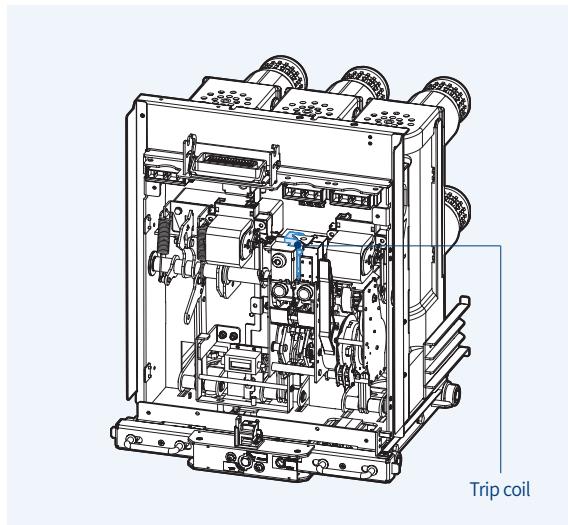


- It is a control device which trips a circuit breaker from remote place, when applying voltage continuously or instantaneously over 35ms to coil control terminals.
- When UVT coil is installed, its location is changed.

Item	VL Type							
	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130V	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	$\leq 5$							
Rated current (A)	$\leq 10$	$\leq 5$	$\leq 4$	$\leq 2$				-

Note) Rated operation and control voltage range, see page 65.

### VH type

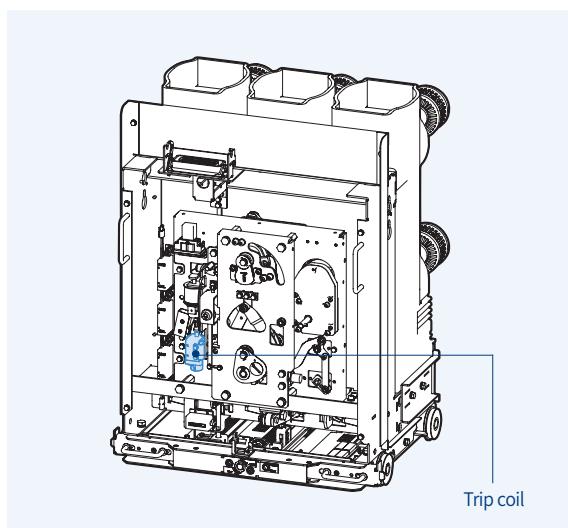

- It is a control device which trips a circuit breaker, when applying voltage continuously or instantaneously over 35ms to the coil control terminals.

Item	VH Type							
	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V	
Rated current (A)	$\leq 8$	$\leq 3$	$\leq 3.5$	$\leq 2.5$	$\leq 8$	$\leq 3$	$\leq 2.5$	


Note) Rated operation and control voltage range, see page 65.

# Accessories

## Secondary Trip Coil: A1 Secondary Trip Coil with TCM Contact : A2

Installed inside of a breaker as an option


**VL type**

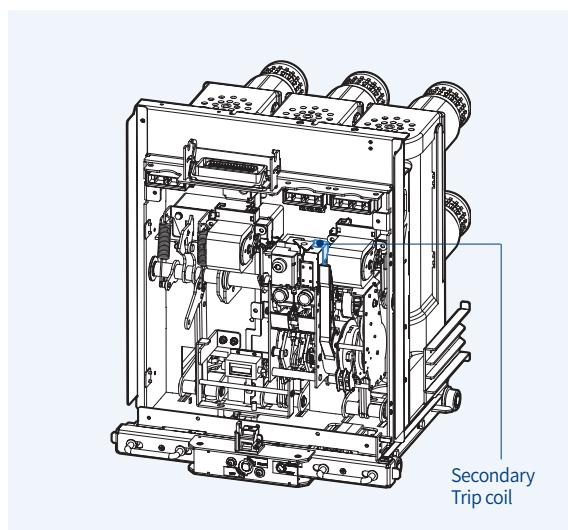

- It is a control device which trips a circuit breaker doubly from the outside. If the trip coil (T) fails, it can trip a circuit breaker safely.
- Trip coil: Install it at existing location.
- Secondary trip coil: Install it on the right side of the trip coil.
- It is not available with UVT coil when installing secondary trip coil.

Item	VL Type							
	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130V	AC 200~250V
Power consumption (inrush, W)	200							
Power consumption (inrush, W)	$\leq 5$							

**VH type**

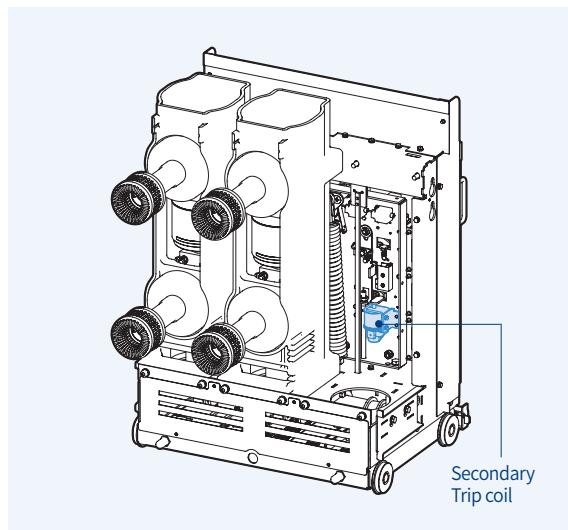

- It is a control device which trips a circuit breaker doubly from the outside. If the trip coil (T) fails, it can trip a circuit breaker safely.
- It is not available with UVT coil when installing secondary trip coil.

Item	VH Type							
	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V	
Rated current (A)	$\leq 8$	$\leq 3$	$\leq 3.5$	$\leq 2.5$	$\leq 8$	$\leq 3$	$\leq 2.5$	


## Rated operation and control voltage range

Item		Susol VCB			Remarks
		VL : 7.2kV8/12.5kA	VL : 20/25kA	VH	
Motor	AC	85~110%	85~110%	85~110%	
	DC	75~110%	85~110%	85~110%	
Closing	AC	85~110%	85~110%	85~110%	
	DC	75~125%	85~110%	85~110%	
Trip	AC	60~125%	85~110%	85~110%	
	DC	60~125%	70~110%	70~110%	
Applied standards		IEC62271-100(2012)KSC4611	IEC62271-100(2012)	IEC62271-100(2012)	

## Current Trip Coil

Installed inside of a breaker as an option

### VL type: T9

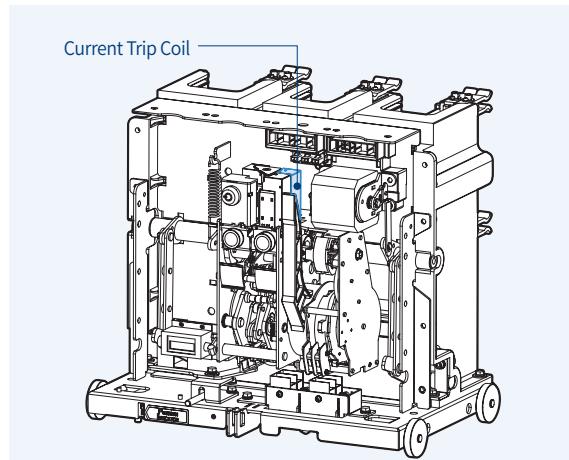

- This trip coil uses the output of the CT as its control power source and is used with over current relay in combination.
- Two current trip coils are supplied.



- Coil burden is 90VA.(T9)
- Coil impedance(Z) is like below
  - 3A: 10Ω or less, Operating current AC 3A (T9)
  - 1A: 160Ω or less, Operating current AC 1A (AV)
  - 5A: 6Ω or less, Operating current is AC 5A (AW)

- CT must be installed at load side.  
If it is installed at bus side there is the danger of malfunction or damage to CT.

- Don't disconnect the control power connector on main power is live condition at service position.  
Otherwise there is the danger of malfunction or damage to CT.

\* CT is recommended to use 15VA 5P10 and more.

### VL type: AV, AW

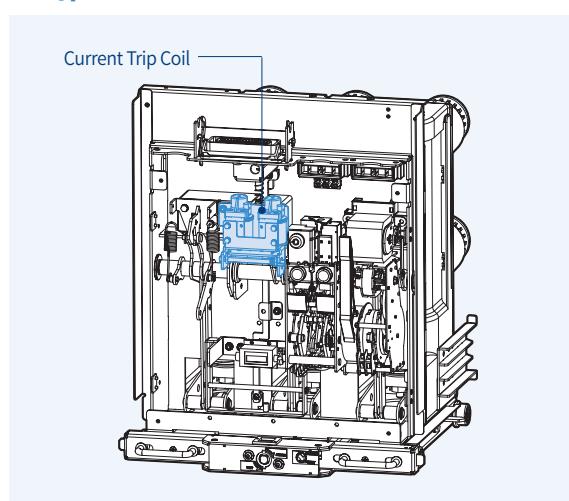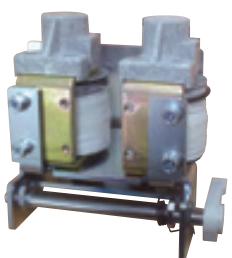


# Accessories

## Auxiliary Contact: SA

Installed inside of a breaker as an option



### VL type

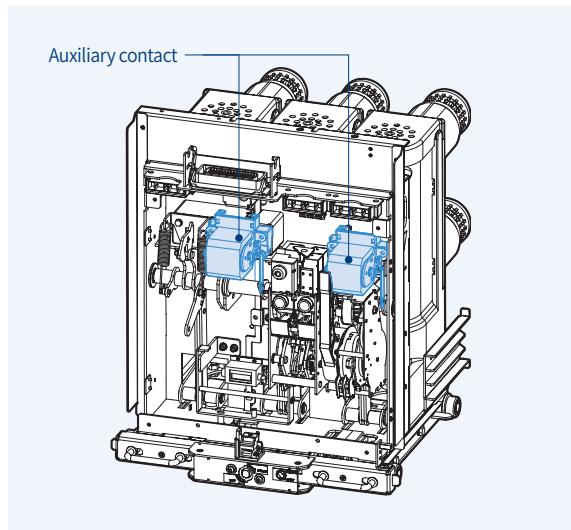

- It is a contact used to monitor ON/OFF status of a breaker from remote place.
- The auxiliary contacts supplied as standard configuration is 4a4b. 10a10b is also available on request.
- For 7.2kV 8/12.5kA VCB standard configuration is 2a2b. 4a4b and 6a6b are optional.

Item	VL: 7.2kV 8/12.5kA	VL: 20/25kA, VH
Standard	2a2b	4a4b
Optional	4a4b, 6a6b	10a10b

### VH type

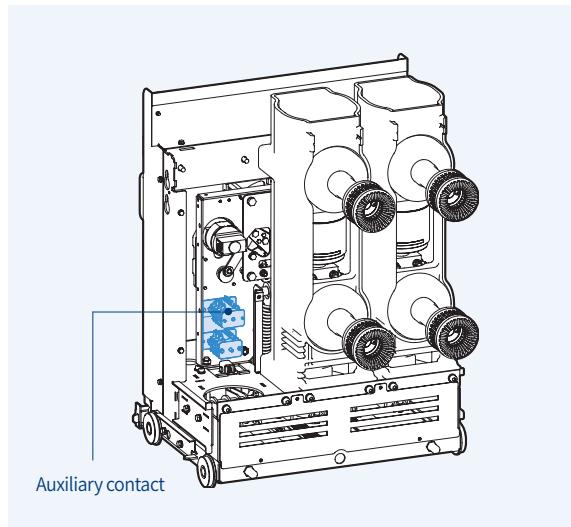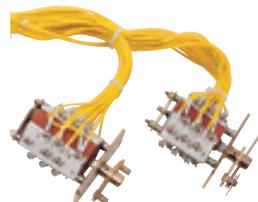

Item		VL/VH Type			Remarks
		Resistive load (A)	Inductive load (A)		
Contact configuration	AC	250V	10	5	For all models
		125V	10	5	
	DC	250V	10	5	
		125V	10	5	
		30V	10	5	


## Under Voltage Trip Coil: U

Installed inside of a breaker as an option



**VL/VH type**



VL type

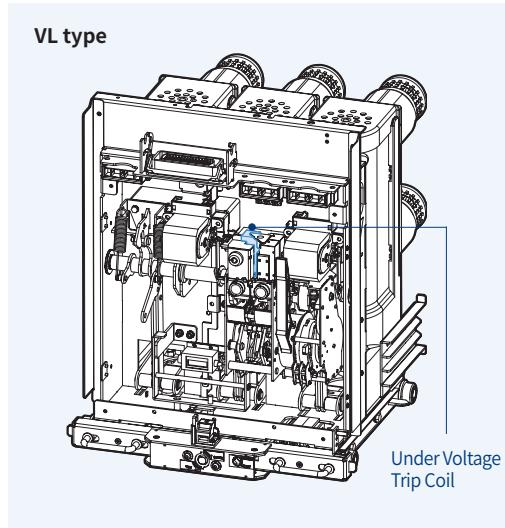

**VH type**

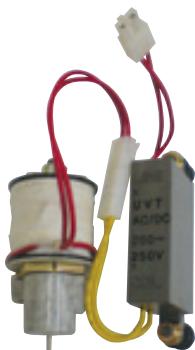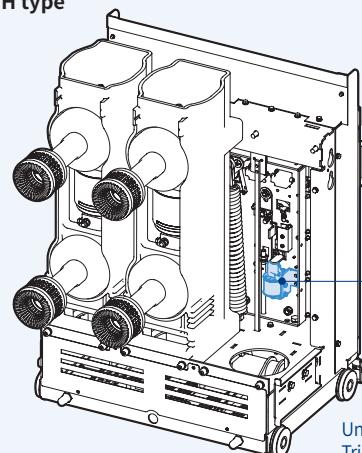

VH type

- It is installed inside of a breaker to trip when the main power or control power voltage drops below certain value. Instantaneous type is only available with UVT coil and Time delay type is available by connecting UVT coil and UVT time delay controller.
- The closing of a circuit breaker is impossible mechanically or electrically if control power is not supplied to UVT. To close the circuit breaker, 65~85% of rated voltage should be applied.
- UVT and secondary trip coil will not be selected together.

1. UVT rated voltage and characteristic

- Operating voltage range: Pick up 0.65~0.85Vn, Drop out 0.4~0.6Vn
- Operating voltage ranges based on the minimum value of each rated voltage (Vn)

Item	VL Type							
	Input voltage (Vn)	DC 24~30V	DC 48~60V	DC 110V	DC 125V	DC 220V	AC 48V	AC 100~130V
Power consumption (inrush, W)	200							
Power consumption (steady, W)	$\leq 5$							


Item	VH Type							
	Input voltage (Vn)	DC 48V	DC 110V	DC 125V	DC 220V	AC 48V	AC 110V	AC 220V
Power consumption (inrush, W)	350							
Power consumption (steady, W)	$\leq 10$							

# Accessories

## Position Switch: A3, A4, A5

Installed inside of a breaker as an option

### VL type E/F/G Cradle

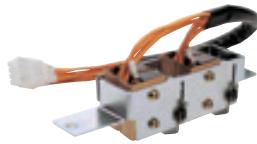


Small VCB (VL)




Medium VCB (VL)


VL: 7.2kV 8/12.5kA

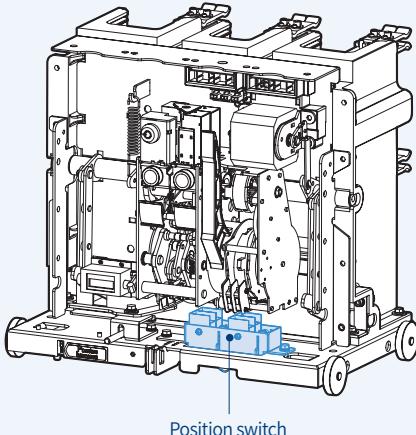

VL: 20/25kA

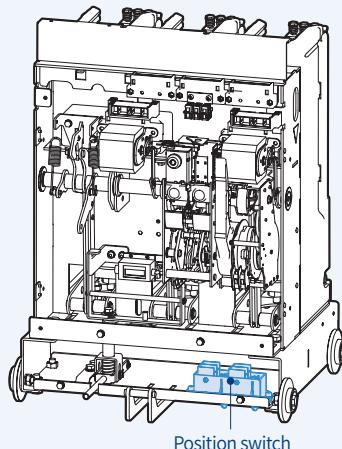


### VL/VH type H Cradle

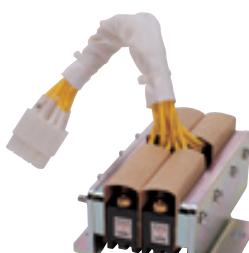


Large model (VH)




VL: 20/25kA

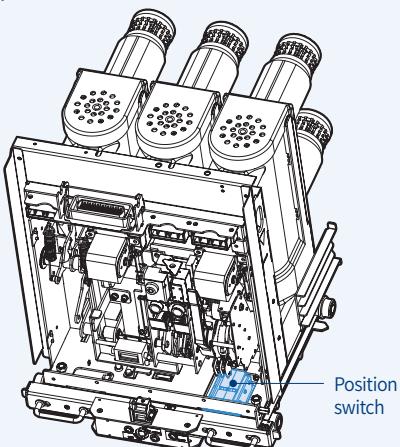

VH

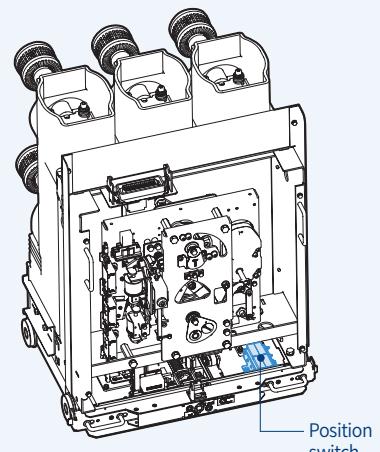


### Contact configuration

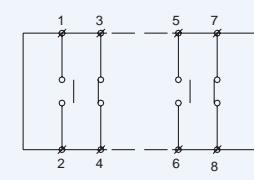

## Latch checking switch: A6

Installed inside of a breaker as an option

**VH type**

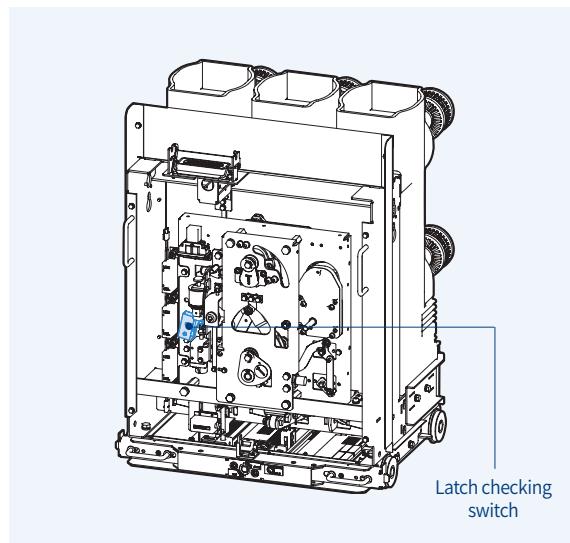

- This switch works in conjunction with the mechanism of the breaker. It checks if the breaker is ready to be closed.
- When the mechanism is OFF and the closing spring is at charged status the switch becomes "ON", which means the mechanism is ready to be closed.
- If the latch is not in a proper position the switch prevents the breaker from closing. In case of VH type it is connected internally in series with the closing coil.

## Counter: C

Installed inside of a breaker as standard

**VL/VH type**




- It displays the total number of ON/OFF operations of a breaker.

# Accessories

## Keylock: A7

Installed inside of a breaker as an option

**VL type**

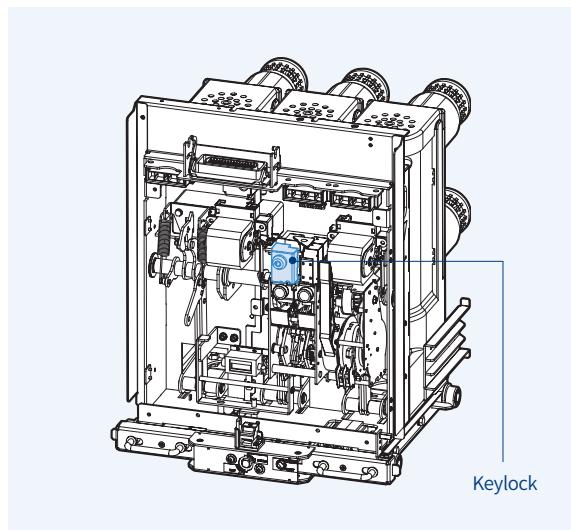


- The key is to unlock the locking device first to close the breaker electrically and mechanically.

\* How to operate

- It is not possible to pull out the key in the unlocked position, possible only in locked status.
- Pushing "OFF" switch of a breaker turn the key counter-clockwise to the locked position and pull it out.
- It is not possible to close the breaker electrically and mechanically in the locked position.
- Insert the key and turn clockwise and then the breaker can be closed electrically and mechanically.

**VH type**

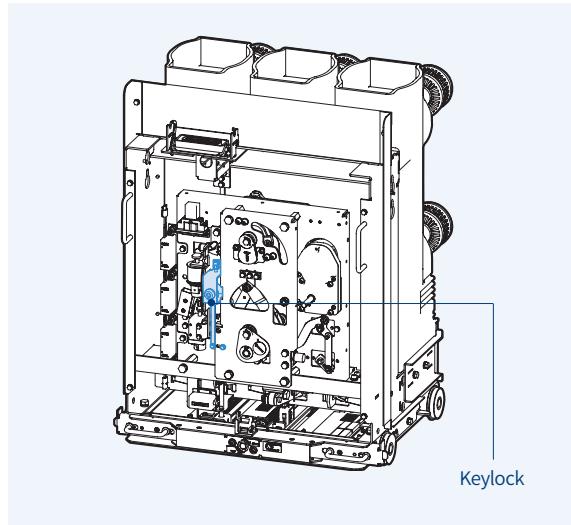


\*How to operate

- It is not possible to pull out the key in the unlocked position, possible only in locked status.
- Trip the breaker first and then turn the key counter-clockwise to the locked position and pull it out.
- It is not possible to close the breaker electrically and mechanically in the locked position.

## Button Padlock: A8

Installed inside of a breaker as an option


**VL type**

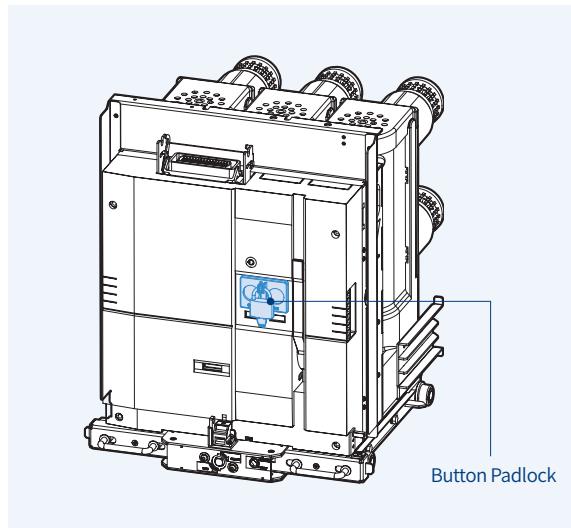

- It is to prevent manual operation of ON/OFF button due to user's wrong handling.
- It is not possible to handle ON/OFF operation under the "Button lock" status.

\* Key lock is not supplied.

**VH type**

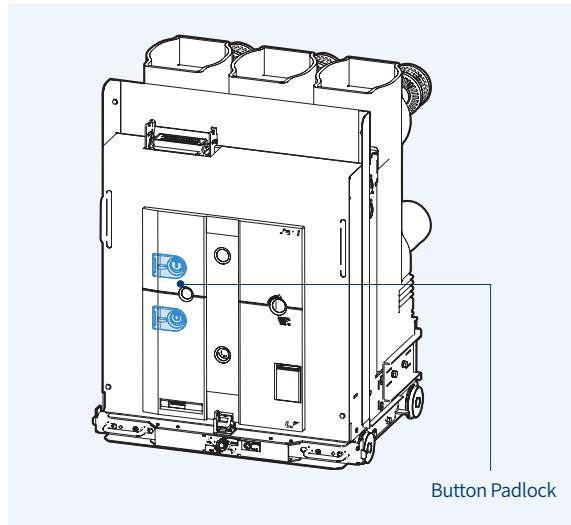

# Accessories


## Button Cover: A9

Installed inside of a breaker as an option

### VL type



Push Bar

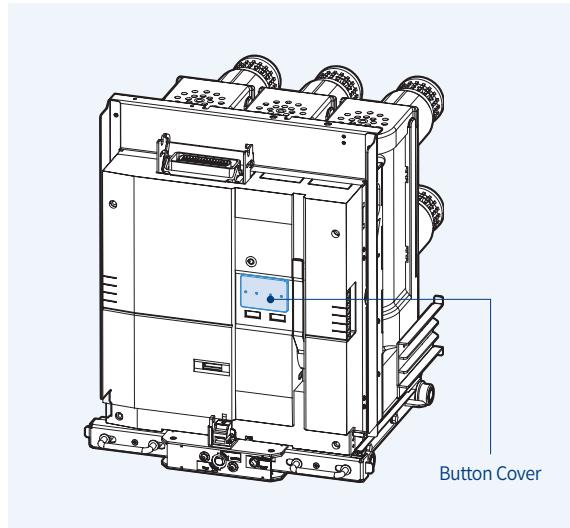


- It is a protection cover to prevent an accident due to unintended operation of ON/OFF button.
- Use the push-bar to operate the ON/OFF button.

### VH type



Push Bar

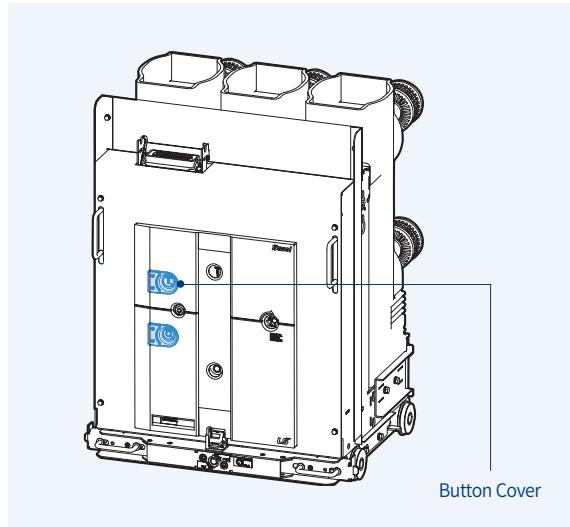

## Lead wire

Supplied separately from a breaker as an option


### VL/VH type




A type connector



Q type connector

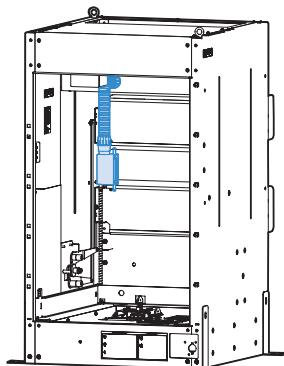

Installation of CB Compartment

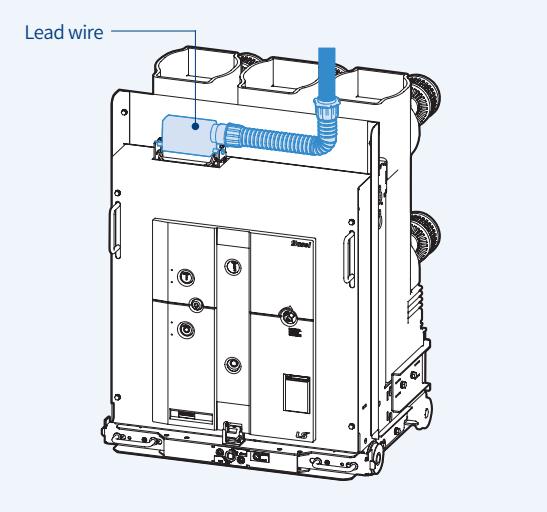

- The wiring for connecting the control circuit of the circuit breaker from the outside is supplied with 2m of wiring.
- A type connector is supplied for P/E/F/G type of VL VCB.
- Q type connector is supplied for P type of VH VCB.
- In case of H type breaker of VL and VH models the Lead wire is installed in the cradle when supplied.

### Supply ways of Lead wires by VCB model

VCB model	Cradle type	P	E	F	G	H
VL						Optional purchase or cradle shipment (optional)
VH						Optional purchase or cradle shipment (optional)

## Plug/Terminal for lead wire

Supplied separately from a breaker as an option

### VL/VH type



A type connector



Q type connector

- It is connector to connect with the connector installed in the breaker.  
(supply connectors and terminal only for lead wire)
- Type of connector is depends on the type of connector installed in the breaker- A or Q.

# Accessories

## Standard Lead Wire

Type	Detailed breaker type	Wiring type	Auxiliary contact connector	Flammability rating	Color	SA/SB Type *1)		SA/SQ Type *2)	
						Standard wiring (-)	Optional wiring (A1,A2,A3,A4,A5)	Standard wiring (-)	Optional wiring (A1,A2,A3,A4,A5)
VL-Type	VL-06□08,13□04,06	Lead wire	SA1	HB	yellow	70723171101	70723171102	70723171101	70723171102
				blue	70723171107	70723171108	70723171107	70723171108	
				XHHW	yellow	70723171113	70723171114	70723171113	70723171114
			SA2	blue	70723171120	70723171121	70723171120	70723171121	
				HB	yellow	70723171105	70723171106	70723171105	70723171106
				blue	70723171111	70723171112	70723171111	70723171112	
			SA3	XHHW	yellow	70723171117	70723171118	70723171117	70723171118
				blue	70723171122	70723171123	70723171122	70723171123	
				HB	yellow	70723171103	70723171104	70723171103	70723171104
		User plug	SA1 SA2 SA3	blue	70723171113	70723171114	70723171113	70723171114	
				XHHW	yellow	70723171115	70723171116	70723171115	70723171116
				blue	70723171124	70723171125	70723171124	70723171125	
VH-Type	VL-06,12,17,20,25□ 20,25,32□13,20,25	Lead wire	SA2	HB	yellow	70723172101	70723172102	70723172101	70723172102
				blue	70723172112	70723172113	70723172112	70723172113	
			XHHW	yellow	70723172116	70723172117	70723172116	70723172117	
				blue	70723172144	70723172145	70723172144	70723172145	
			SA4	HB	yellow	70723172103	70723172104	70723172103	70723172104
				blue	70723172114	70723172115	70723172114	70723172115	
			XHHW	yellow	70723172118	70723172119	70723172118	70723172119	
				blue	70723172146	70723172147	70723172146	70723172147	
		User plug	SQ2 (SB2)	HB	yellow	70723172107		70723172503	
				blue	70723172149		70723172519		
			SQ4 (SB4)	HB	yellow	70723172109		70723172505	
				blue	70723172150		70723172521		
		User plug	SQ4 (SB4)	HB	yellow	70723172108		70723172504	
				blue	70723172151		70723172520		
			SA2	XHHW	yellow	70723172170		70723172506	
				blue	70723172146		70723172522		
VH-Type	VH-06,12,17,20,25,36□ 32,40,50□13,20,25,32,40,50	Lead wire	SA4	HB	yellow	70723173109		70723172503	
				blue	70723173111		70723172519		
			XHHW	yellow	70723173119		70723172505		
				blue	70723173112		70723172521		
		User plug	SQ4 (SB4)	HB	yellow	70723173110		70723172504	
				blue	70723173113		70723172520		
			SQ2 (SB2)			70723173105		70723172511	
						70723173106		70723172512	
LVB-Type	LVB-06,12□-32,40□/12,20,30 VH-06,12□32,40□12,20,30 (Pro-MEC & Susol PI)	Lead wire	SA2	HB	yellow	70723143117	70723143117	70723143117	70723143117
				blue	70713143020	70713143020	70713143020	70713143020	
			XHHW	yellow	70713143012	70713143012	70713143012	70713143012	
				blue	70713143030	70713143030	70713143030	70713143030	
			SA4	HB	yellow	70723143118	70723143118	70723143118	70723143118
				blue	70713143021	70713143021	70713143021	70713143021	
			XHHW	yellow	70713143013	70713143013	70713143013	70713143013	
				blue	70713143031	70713143031	70713143031	70713143031	
			2M (2G)	HB	yellow	70713143024		70723143524	
				blue	70713143044		70723143544		
			XHHW	yellow	70713143049		70723143549		
				blue	70713143047		70723143547		
		User plug	2N (2H)	HB	yellow	70713143025		70723143525	
				blue	70713143045		70723143545		
			XHHW	yellow	70713143048		70723143548		
				blue	70713143046		70723143546		
			2B 2E 2M(2G) 2N(2H)			73263143007		73263143007	
						73263143008		73263143008	
						73263143030		70723143651	
						73263143031		70723143652	




\*1: If even one of the options A1, A2, A3, A4, A5 is applied to the VCB code, please order with the optional wiring code.

(ex. Wiring (HB/Yellow) code conforming to VL-06F13A06-M1C1T1SA2U0-A4: 70723171106

\*2: After April 2021, the B Type connector is changed to Q Type (VL/VH: SB->SQ, LVB: 2G, 2H->2M, 2N), please order with the appropriate wiring.


(ex. Wiring (HB/Yellow) code conforming to VL-06F25A06-M1C1T1SQ2U0: 70723172503

## Handle & Lifting Hook

Breaker type	Cradle	Racking handle		Spring charge handle		Lifting Hook			
		code	Appearance	code	Appearance	Breaker type	code	Appearance	
VL-06□08,13 VL-06,12, 17□20,25,31.5 VL-24,25□13, 16,25	P	N. A.				VH-06,12, 17□50□13, 20,25,32	75123173131		
		E, F, G	55223171101						
	H.K	P	N. A.				75123173132		
		E, F, G	55213143005						
		A type	55223172407	 For medium size CB [Short]		VH-20,25□25□25	75123173105		
		B type	55223172403	 For medium size CB [Long]			75123173106		
		C type	55223172405	 With universal joint and plastic grip		VH-36□25,32, 40□13,20,32	75123173165		
		D type	55223172406	 With universal joint			75123173166		

# Accessories



## Handle & Lifting Hook

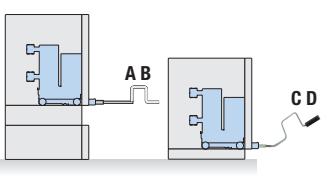Breaker type	Cradle	Racking handle		Spring charge handle		Lifting Hook				
		code	Appearance	code	Appearance	Breaker type	code	Appearance		
VH-06□32, 40(P,E,F,G) LVB-06, 12□32,40L(G/T)	P	N. A.		55213143006		VH-06,12, 17□40,50□40	75123173981			
		E, F, G	55213143005			VH-06,12□40, 50□,50	75123173982			
			55213143001			Earthing switch operating handle (Common)				
			55213143022							
			55213163003							
	G/T	With universal joint								
		P	N. A.							
		A type	55223172407			Right open (Standard handle)	55223172701			
		B type	55223172403				55223172703			
		C type	55223172405				55223172101			
		D type	55223172406							
										

## Plug interlock: AC

Installed inside of a breaker as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

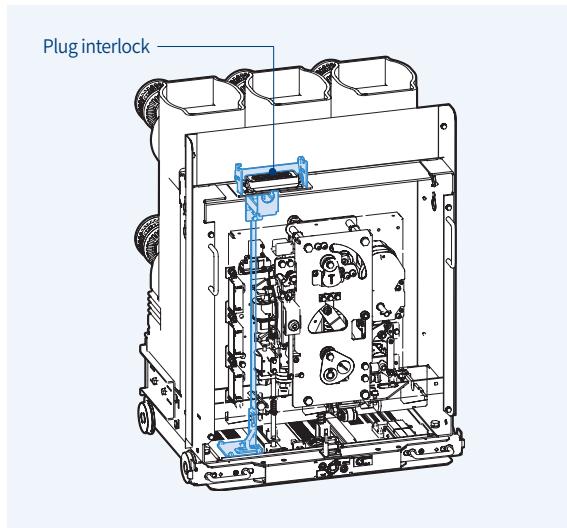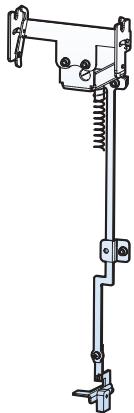


- It checks if the control power connector on the cradle (H type) is connected with the connecting terminal of the breaker before the proceeding of draw-in or out.
- It is not allowed to separate the control power connector from the breaker in the position of draw-in /out or SERVICE, but TEST position.

## Padlock/Door racking interlock: AD

Installed inside of a breaker as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

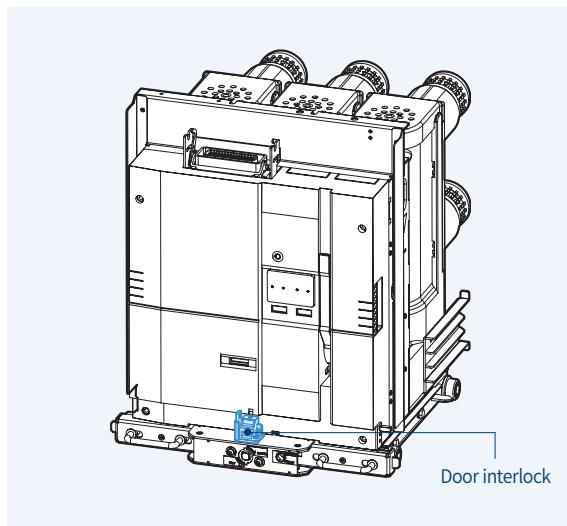



- With this door options for H type cradle draw-in/out is allowed only when the door is closed.
- If draw-in /out is necessary when the door is open, use the operation lever put in the slot of the breaker handle.  
Insert it into the hole in the bottom of door interlock.
- Padlock is also optional, which can lock to prevents the draw-in/out of the breaker in the position of TEST and SERVICE.

# Accessories

## MOC drive device: AE



Installed inside of a breaker as an option

**VL type**  
**(7.2kV 20/25kA 630A~)**

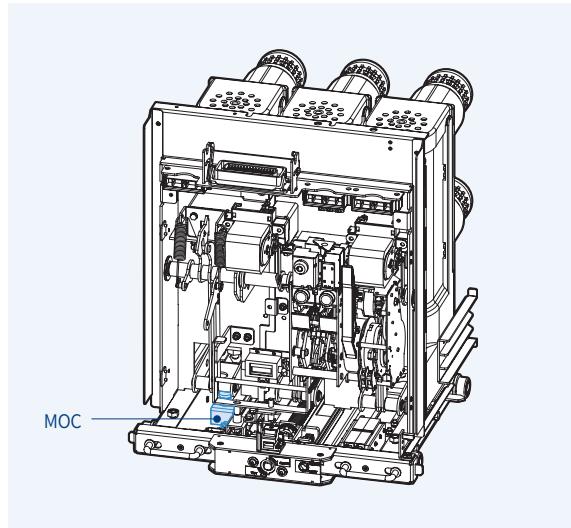

- It must be installed in the breaker to drive the MOC installed in H type cradle.
- MOC, Mechanically operated cell switch is the device to indicates the Closed/Trip status of VCB in 'SERVICE' position only.
- This MOC drive device in the breaker should be installed when MOC in the cradle is used.


**VH type**

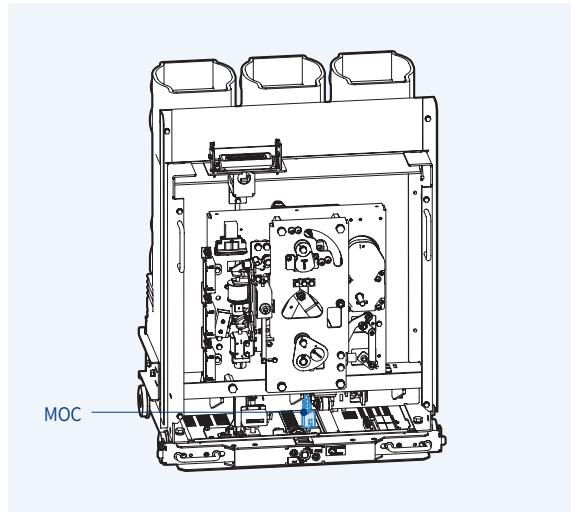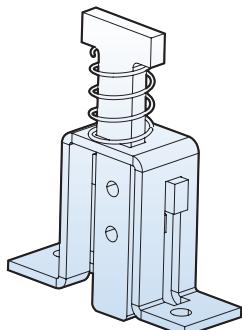

## Locking magnet: AF

Installed inside of a breaker as an option

**VL type**

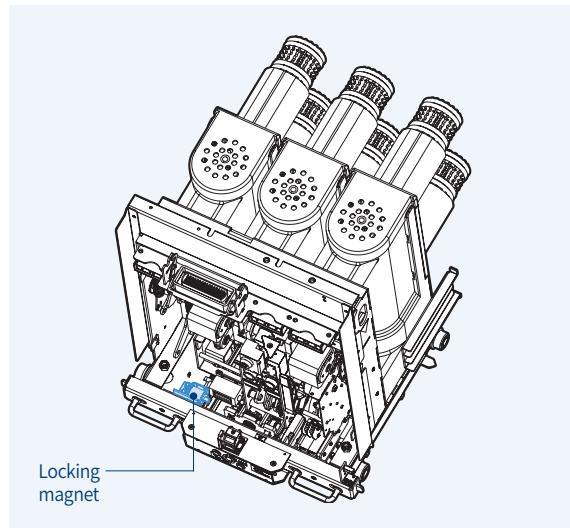


- It allows the drawing-in of the breaker in the TEST position under the condition that the control power connector on the cradle (H type) is connected with the connecting terminal of the breaker and the power is supplied.

- Constant power must be supplied to locking magnet until the draw-in/out operation is completed and operation handle is inserted

\* Control power rating is the same as that of a motor.

**VH type**

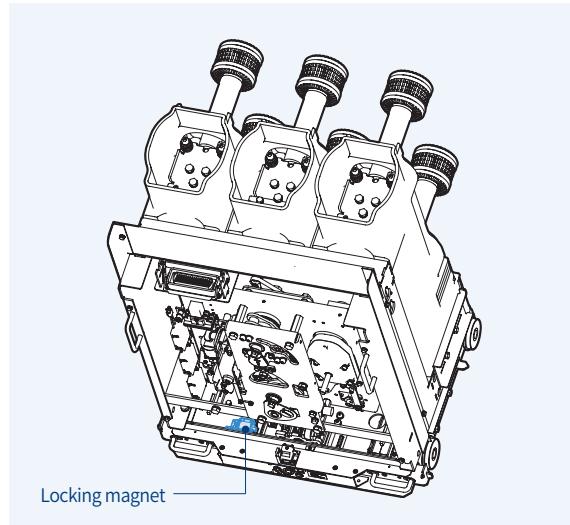


# Accessories


## Trip coil monitoring contact

Installed inside of a breaker as standard

### VL type

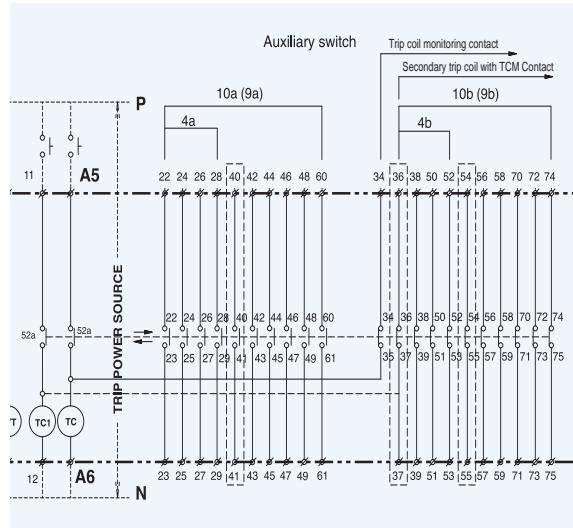


### VH type

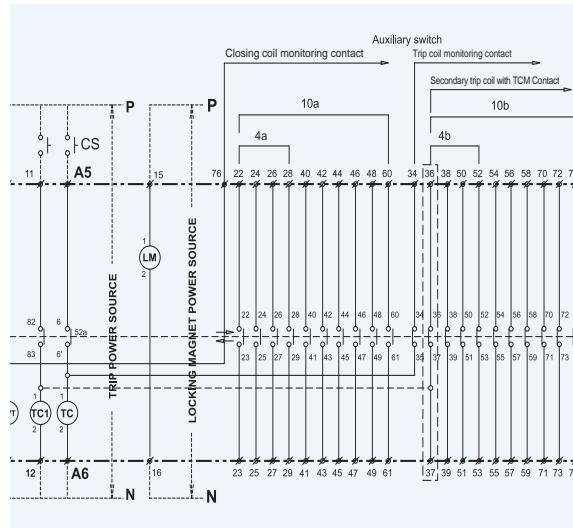

- Device for monitoring the functions of the trip coils.
- To monitor the trip coils connect its terminals with the trip coil monitoring relay as shown on the circuit diagram.
  - If the trip coil is normal: closed-circuit consisting
  - If the trip coil is damaged: open circuit
- 1) Terminal A5 and A6 monitor the trip coils(TC) in Closed position of the breaker
- 2) Terminal A6 and auxiliary contact terminal 34 monitor the trip coils(TC) in trip position of the breaker
- 3) Terminal 11 and 12 monitor the secondary trip coils(TC1) in Closed position of the breaker
- 4) Terminal 12 and auxiliary contact terminal 36 monitor the secondary trip coils(TC1) in trip position of the breaker
- Coil Test Unit is optional, which enable monitoring the coils by connecting in parallel with the trip coil operation switch.
- Trip coil monitoring contact is available only when trip coils T1, T2, T3, T4, T5 are selected.

## Coil Test Unit: CTU



Installed inside of a breaker as an option

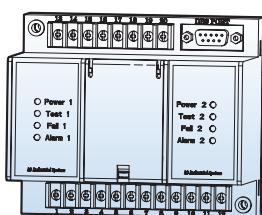

- When no current flows through the coil it gives the test current which does not cause the coil to operate to check whether the coil is disconnected or not.
  - If the test current flows normally: coil normal
  - If the test current does not flow through: coil disconnected

- ※ As it is connected in parallel with the control part of the coil the normal operation of the coil is not affected.
- ※ Monitoring of the running coils is not possible.
- ※ One test unit can monitor up to two coils.

1. Input voltage: AC/DC 75V~264V
2. Contact output
  - 1) 2× a contacts for Fail indication and 2× a contacts for Alarm
  - 2) 250Vac/10A Resistive, 30Vdc/10A Resistive
3. Disconnection test cycle is 12 seconds (Test LED blinks)
4. The default operation
  - If Fail happens (coil disconnected), Fail LED turns on and the Fail contacts become short state.
  - If Fail happens three times in series, Alarm LED turns on and the Alarm contacts become short state.
  - In order to clear the Alarm status push up DIP switch on the front and then push down it (Off → On → Off)

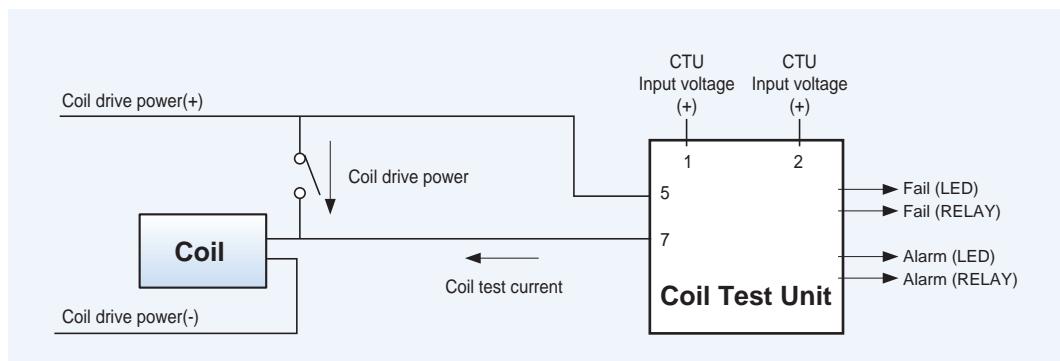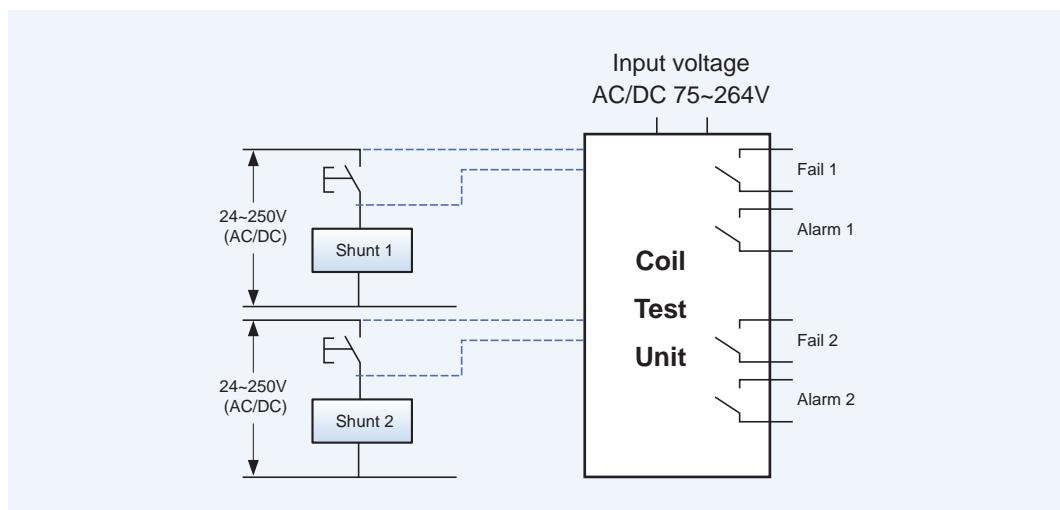

# Accessories

## Condenser trip device: CTD

Installed inside of a breaker as an option


### Ratings




Ratings	Specification	
Model	CB - T1	CB - T2
Rated input voltage (V)	AC 100/110	AC 200/220
Frequency (Hz)	50/60	50/60
Rated charge voltage (V)	140/155	280/310
Charging time	Within 10sec.	Within 10sec.
Trip possible time	Within 30sec.	Within 30sec.
Range of Input voltage	85%~110%	85%~110%
Condenser capacity ( $\mu\text{F}$ )	1,000	560

- It gets a circuit breaker tripped electrically within regular time when control power supply is broken down and is used with Shunt coil, SHT. In case there is no DC power, It can be used as the rectifier which supplies DC power to a circuit breaker by rectifying AC power.
- Tripping within 30 seconds on the power failure is possible. However after that automatic trip circuit must be configured separately in the switchgear.


### Terminal arrangement

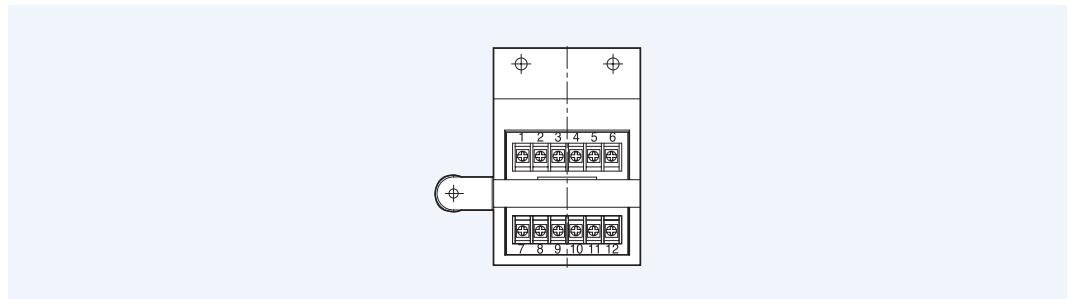

### External dimension

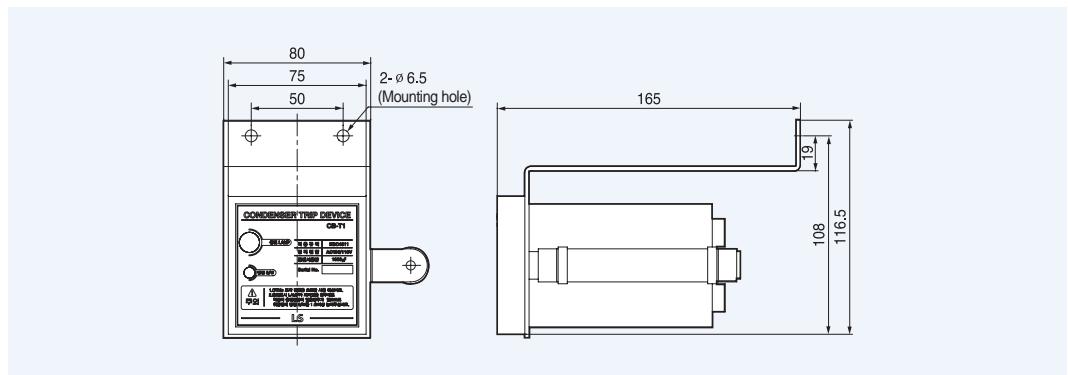

### Circuit diagram

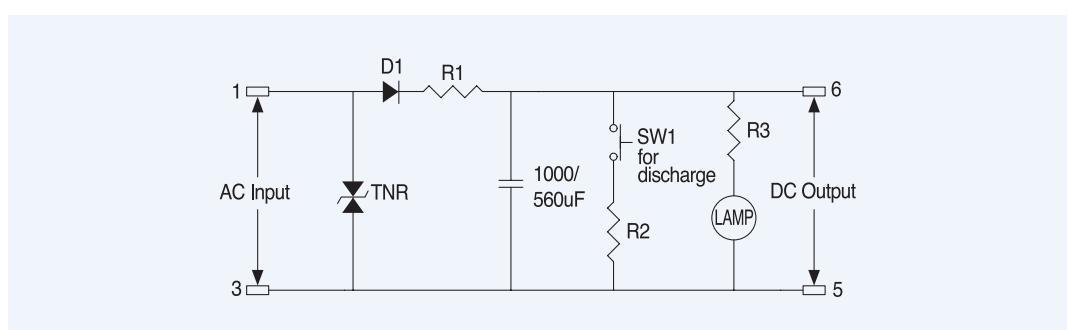

## UVT Time delay: UDC

Installed inside of a breaker as an option



- UVT time delay, UDC is to delay the trip signal from UVT.
- Without UDC the breaker will be tripped instantaneously by the trip signal from UVT installed inside of the breaker even in the the momentary power failure.
- UDC can delay the trip time to avoid this unintended instantaneous trip in the event of such power failure.
- It can be installed on the cradle or inside of the switchgear.
- UDC provides output contacts for indication of trip status due to the UVT coil inside of the breaker.  
b contact is closed at normal state and a contact is closed at trip.

### ■ Characteristics


Rated voltage (Vn)		Opration voltage range (V)		Consumption (VA or W)		Time delay (ms)
DC (V)	AC (V)	Pick up	Drop out	Inrush	Steady-state	
48~60	48					
100~130	100~130	0.65~0.85 Vn	0.4~0.65 Vn	200	≤ 5	0.5, 1, 1.5, 3
200~250	200~250					

- Operating voltage ranges are based on the minimum value of each rated voltage (Vn)

### ■ Ratings of output contacts

Rated voltage (V)	Rated current (A), Resistive load	Max. switching voltage (A)	Max. switching current (A)
24V DC	≤ 12		
120V AC	≤ 12	110V DC 250V AC	
250V AC	≤ 10		15

### ■ Wiring diagram


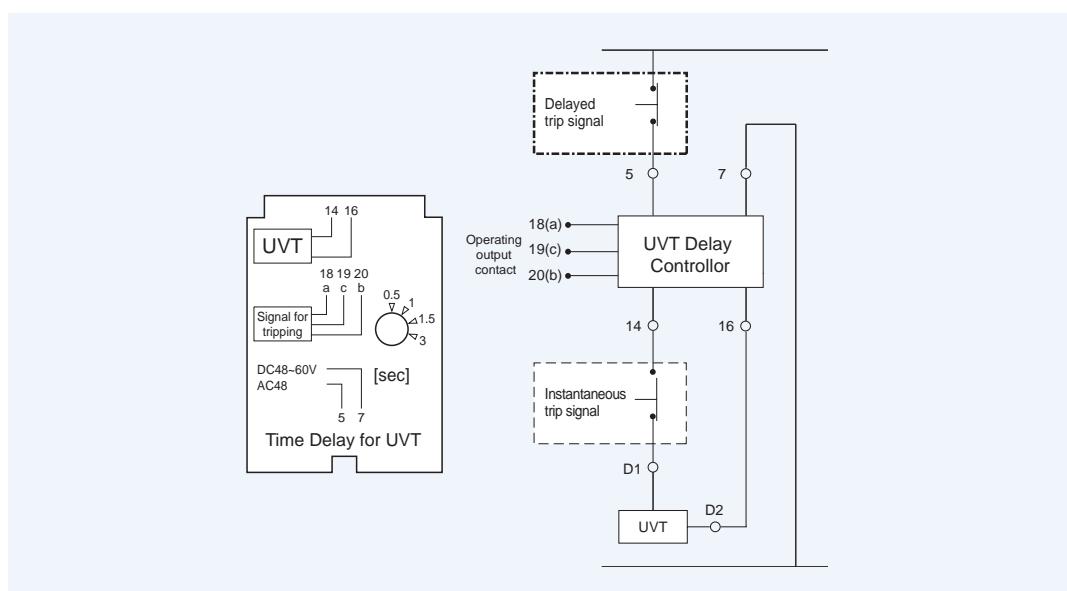


# Accessories

## Temperature sensor and monitoring unit TM

Installed inside of a breaker as an option

**VL/VH type  
(7.2kV 20/25kA 630A~)**

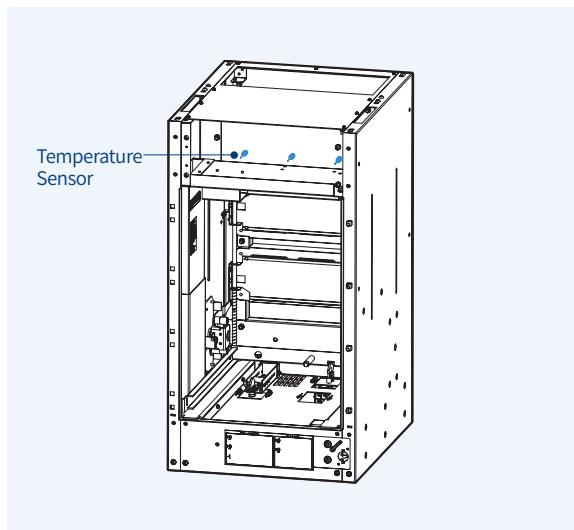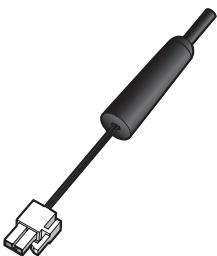

- Temperature Alarm Unit displays the input temperature detected through the temperature sensor installed in H-type cradle.

- Temperature sensor can be installed up to three (R, S, T phase).



- Temperature Alarm Unit converts the temperatures detected from the sensor in the cradle and displays the maximum value and can transmit it through communication.

- If the input temperature is above standard it may cause alarm.


Temperature Alarm Unit supports Modbus/RS-485 communication and contact us Profibus-DP communication.



Temperature sensor and monitoring unit

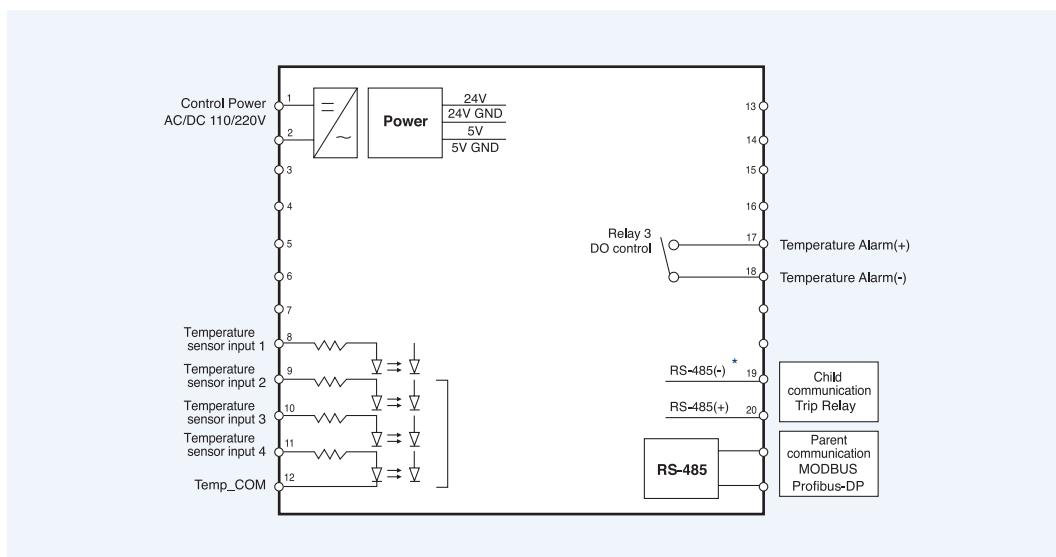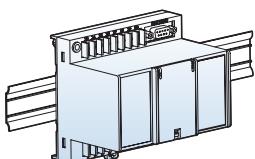



LED temperature display (°C):  
10 ~150°C, Warning  
Display maximum value  
of temperatures

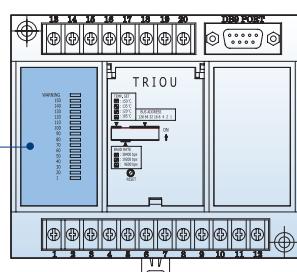

## Earthing Switch: A1

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

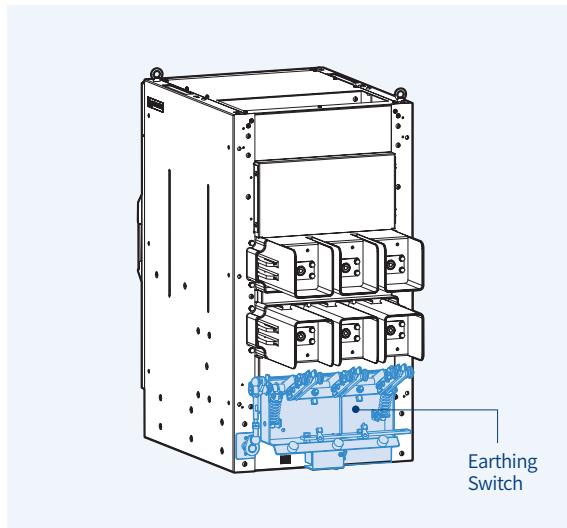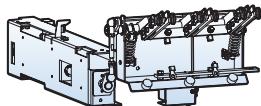


- For the safety during the maintenance of switchgear in the position of TEST/Drawout discharge the charging current in the load side of a VCB with this earthing switch.
- It is available only for H type drawout breaker.

\* Regarding the operations of earthing switch and related accessories see the instruction manual.

\* Applicable Standards: IEC 62271-102

## Position switch for Earthing Switch: A2, A4

Built-in a cradle as an option

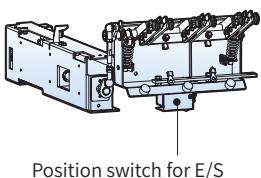


Position switch for E/S

- In case of using earthing switch it can be added to indicate the ON / OFF status of the earthing switch.

\*\* Contact configuration: 2a2b, 6a6b


## Circuit diagram

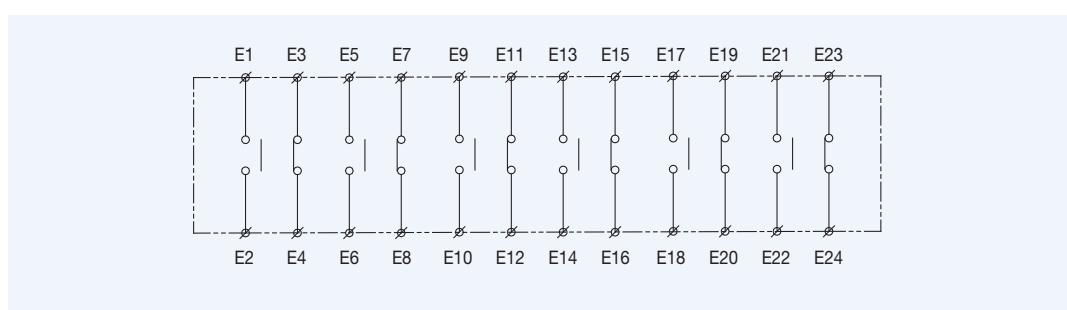

# Accessories

## Keylock for Earthing Switch: A5


Built-in a cradle as an option



- In case of using earthing switch it can be added for two types of interlocking.
  - 1) Interlock to keep opening
  - 2) Interlock to keep earthing

## Locking magnet for Earthing Switch: A6~AD

Built-in a cradle as an option





Locking magnet for  
Earthing Switch

- In case of using earthing switch it can be added to prevent the earthing switch from opening or earthing before it is energized.
- Verify if the locking magnet is energized before opening or earthing the earthing switch.
- Control voltage
  - DC 24V / DC 48V / DC 110V / DC 125V / DC 220V
  - AC 48V / AC 110V / AC 220V

## Shutter padlock: AE

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

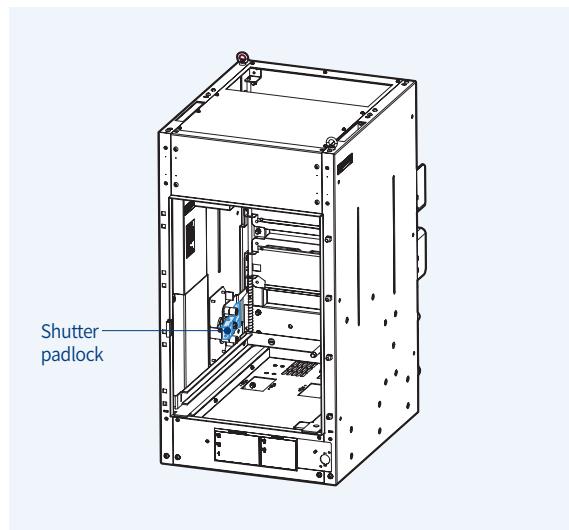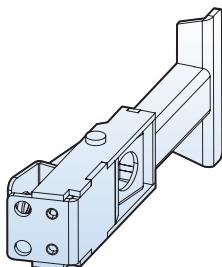


- It is the locking device to lock the primary and secondary shutter in closed state for safety while the breaker is drawn out for maintenance.
- When the breaker is drawn in, the shutter is automatically opened.
- There is a hole for padlock to lock the shutter.
- It can be applied only to H type cradle.


## Truck operated cell switch (TOC: AF)

Built-in a cradle as an option


**VL/VH type**  
**(7.2kV 20/25kA 630A~)**



VL type




VH Type

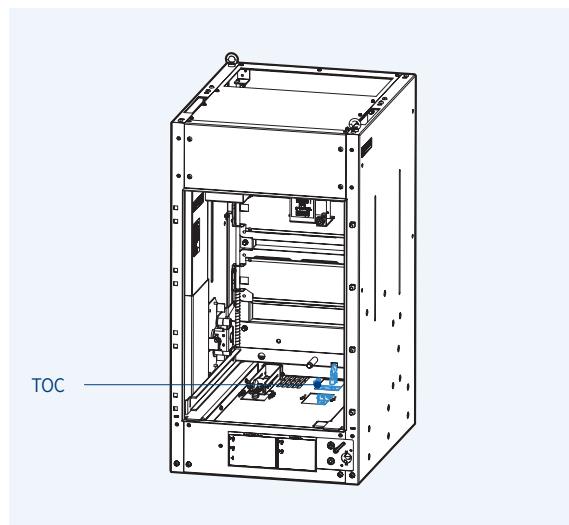

- This auxiliary switch is used to indicate the 'SERVICE' position of VCB. It is installed in the bottom of a H type cradle and operated by the frame of a breaker.
- TOC is consisted of 4 cell switches with changeover contacts as below diagram.

### ■ Circuit diagram

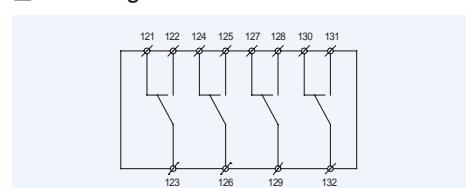

a Contact: 122-123, 125-126, 128-129, 131-132,


b Contact: 121-123, 124-126, 127-129, 130-132

# Accessories


## Mechanical Operated Cell Switch (MOC: AG)

Built-in a cradle as an option


**VL/VH type**  
**(7.2kV 20/25kA 630A~)**



VL type




VH Type

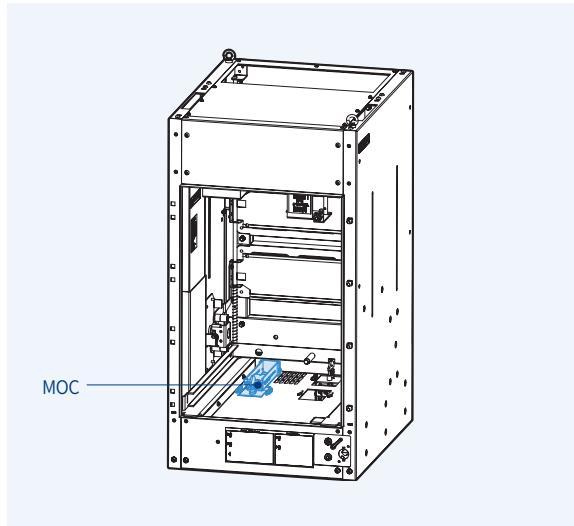

- This auxiliary switch is used to indicate the Close/Trip of VCB. It is operated mechanically at the SERVICE position and installed in the bottom of a H type cradle and operated by the frame of a breaker.
- MOC is consisted of 4 cell switches with changeover contacts as below diagram.

### ■ Circuit diagram

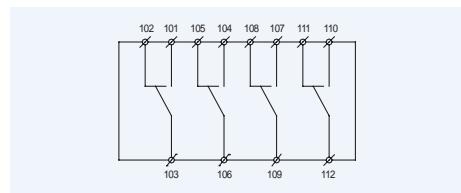


a Contact: 101-103, 104-106, 107-109, 110-112,  
b Contact: 102-103, 105-106, 108-109, 111-112

## Door: AH

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

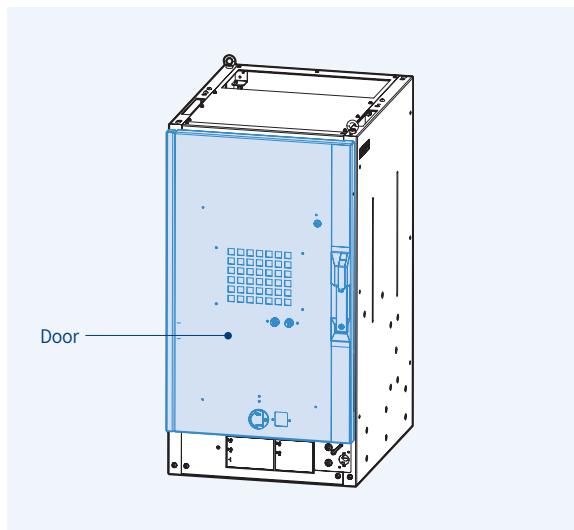


- It is outside door for H type cradle.
- Accessories are available for the door.

## Door Interlock: AJ

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

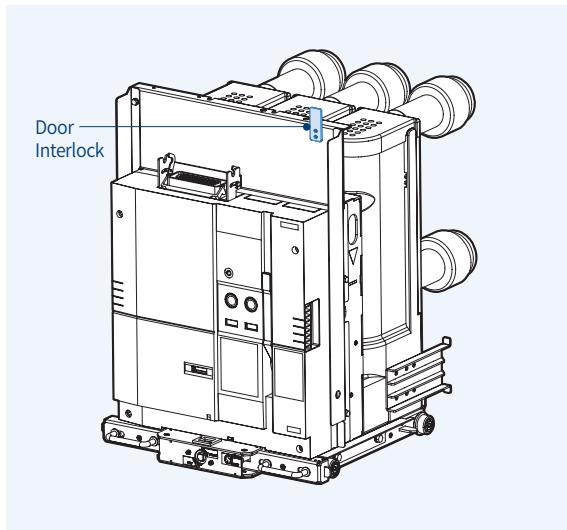


- When the Door is installed to H type cradle, this door interlock prevents opening it at SERVICE position.

## Door Emergency Push button: AK

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

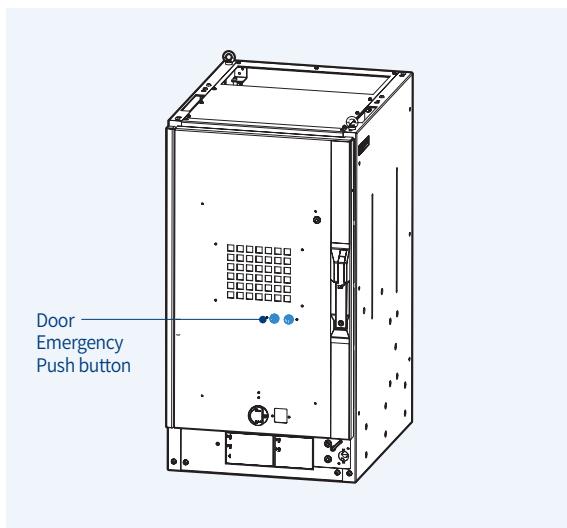


- It is used to enable the Close/Trip of the breaker manually from outside of the door installed to H type cradle during an emergency.
- Push the ON/OFF button by ON/OFF handle supplied separately.

# Accessories

## Temperature Sensor: AC

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

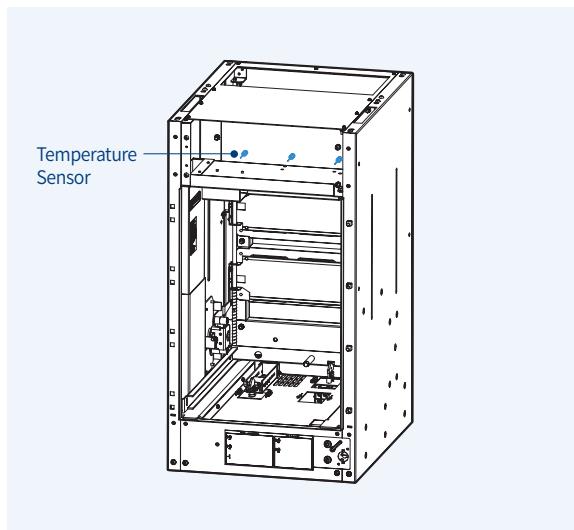


- This sensor is used to detect the temperature in H-type cradle combined with Temperature monitoring unit.
- It can be installed up to three (R, S, T phase).

## Racking In/Out handle

Susol VCB offers various kinds of handle suitable for each use of types and models.  
The order can be proceeded with the code below and ordering quantity is flexibly adjustable.

Type	Cradle	Racking in/out handle	Charging handle	Operating handle for earthing S/W	
VL-06□08, 13	E	55223171101	Not required	-	
	F				
	G				
VL-06□20, 25	E	55213143005	Not required	-	
	F				
	G				
VL-06□20, 25	A	55223172407	Not required		
		55223172401			
	B	55223172403			
		55223172405			
VH-06, 12, 17, 24, 35, 36□	K	55223172405	55213143006		
		55223172406			


### Racking in/out handle for H, K cradle

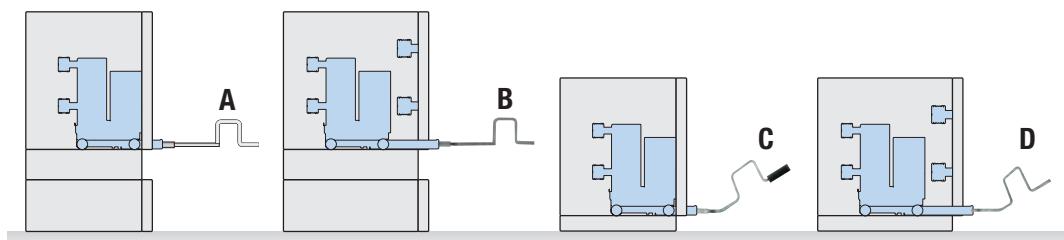

## Type H Cradle Lead Wire: AM~AO

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**


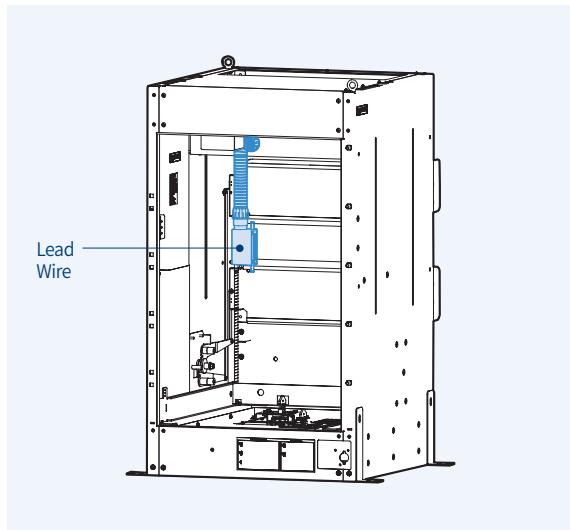


- In case of H type breaker of VL and VH models the Lead wire is installed in the cradle when supplied.
- 4a4b or 10a10b contacts are selectable according to the auxiliary contact of the breaker. Flame retardant cable is used for 4a4b.

## Door Padlock

Built-in a cradle as an option

**VL/VH type**  
**(7.2kV 20/25kA 630A~)**

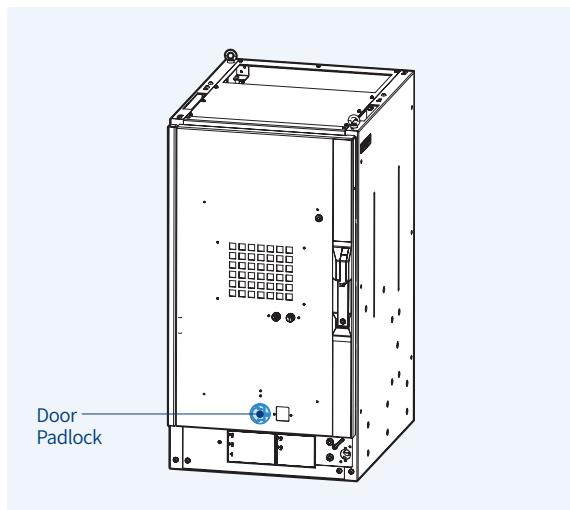

- It is supplied with a door for H type cradle as standard.
- It can be locked by separate padlock to prevent entering the manual handle.

# Accessories


## Auxiliary guide frame



- Auxiliary guide frame is provided in order to move safely 36kV breaker into the switchgear.
- It can be used in combination with the hand pallet which meets the requirement shown below.



### Applicable hand pallet

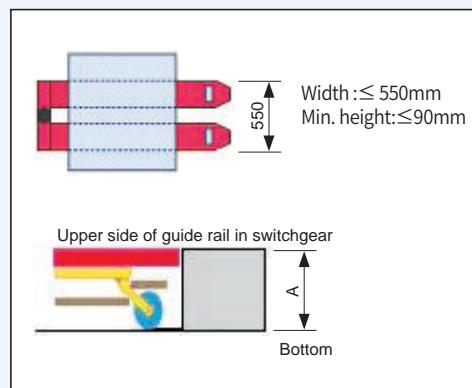

If dimension A in Fig. 1 is less than 120mm B type pallet can be used.  
In case of more than 120mm C type must be applied.




<Fig 1>

# Control circuit diagram - VL type


Susol VCB

**VL-06**

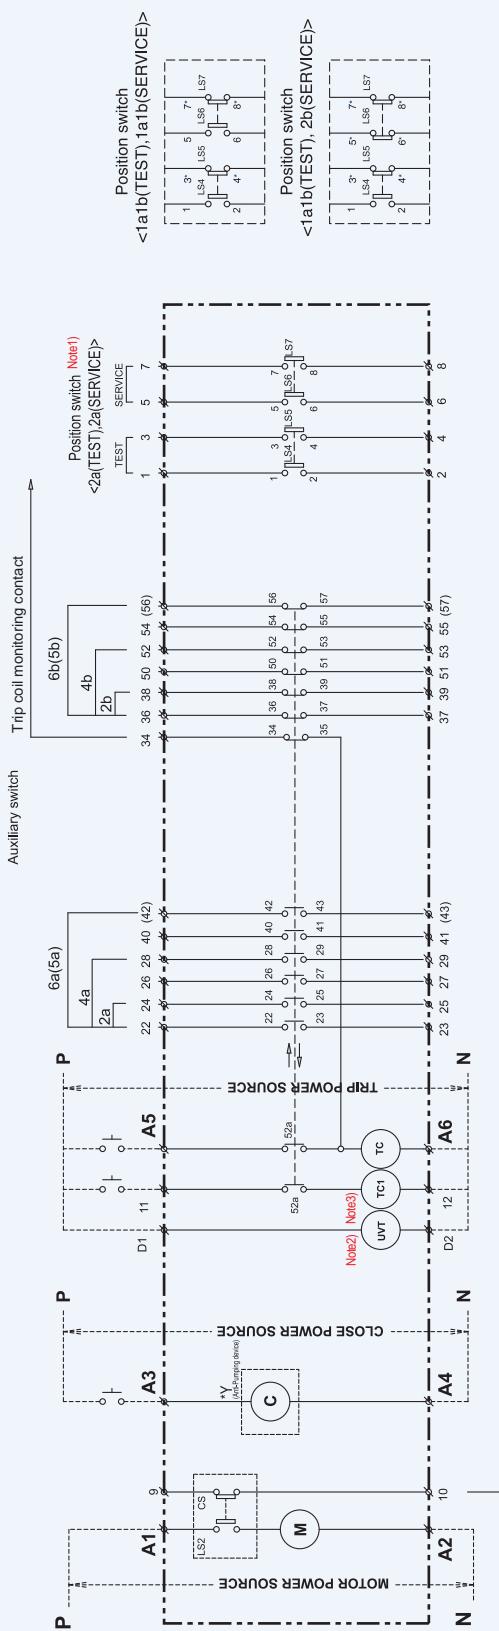

Closing Spring Contact (Charge completion indicating contact)

<Connecting terminal arrangement>

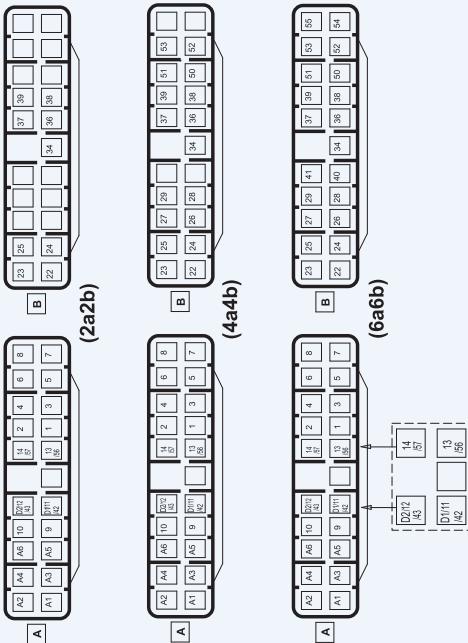

LS2: Motor stop, close spring charged indication limit switch

LS4, LS5: Position SW (close in TEST position)

LS6, LS7: Position SW (close in SERVICE position)

S/W No.	TEST: 1a1b		TEST: 2a		SERVICE: 1a1b		TEST: 1a1b		SERVICE: 1a1b	
	A3	A4	A3	A4	A5	A6	A5	A6	A5	A6
LS4	Close at TEST position	Close at TEST position	Close at TEST position	Open at TEST position	Open at TEST position	Open at TEST position	Open at TEST position	Open at TEST position	Open at TEST position	Open at TEST position
LS5	Open at TEST position	Open at TEST position	Open at TEST position	Close at SERVICE position	Close at SERVICE position	Close at SERVICE position	Close at SERVICE position	Close at SERVICE position	Close at SERVICE position	Close at SERVICE position
LS6	Open at SERVICE position	Open at SERVICE position	Open at SERVICE position	Close at SERVICE position						
LS7	Open at SERVICE position	Open at SERVICE position	Open at SERVICE position	Close at SERVICE position						

Q: External terminal of VCB  
52: Vacuum circuit breaker  
M: Spring charging motor  
TC: Trip coil  
TC1: Secondary trip coil  
C: Close coil  
UVT: Under voltage trip  
52a: Auxiliary switch (a)  
52b: Auxiliary switch (b)  
CTC: Current trip coil  
CTC1: Secondary Current trip coil  
CS: Closing/spring charged Limit Switch  
Y: Anti-Pumping Device  
Anti-Pumping Device is installed inside  
as standard EG6271-1003.6.128

Note 1: Position SW: TEST 2a, SERVICE 2a (Terminal No.: 1, 2, 3, 4, 5, 6, 7, 8)  
TEST position 1a1b, SERVICE position 1a1b/bare available  
(marked contact is b contact)

2. UVT: Under Voltage trip (terminal No.: D1, D2)

3. TCI: Secondary Trip Coil Spare trip coil (terminal No.: 11, 12) —

4. CTC: Current Trip Coil (terminal No.: A5, A6) —

5. Close and Trip coil is One Pulse type, excluding trip coil (DC10/220V)

6. In above optional accessories, UVT, CTC and TCI can not be selected simultaneously

7. UVT, TCI are selected, Maximum auxiliary switch is 4a4b

8. Above circuit diagram is based on OFF status of VCB and closing spring is charged


\*: Anti-pumping device

Anti-pumping device Y supply anti-pumping function to VCB as below. It is composed with circuit in close coil and mechanism.

In case the closing coil(C) becomes permanent energized, the circuit breaker remains in the open position after it has been opened, either by manual or electrical operation. The circuit breaker can be closed only if the closing coil(C) is momentarily de-energized.

# Control circuit diagram - VL type


VL-06/12/17/20/25/36

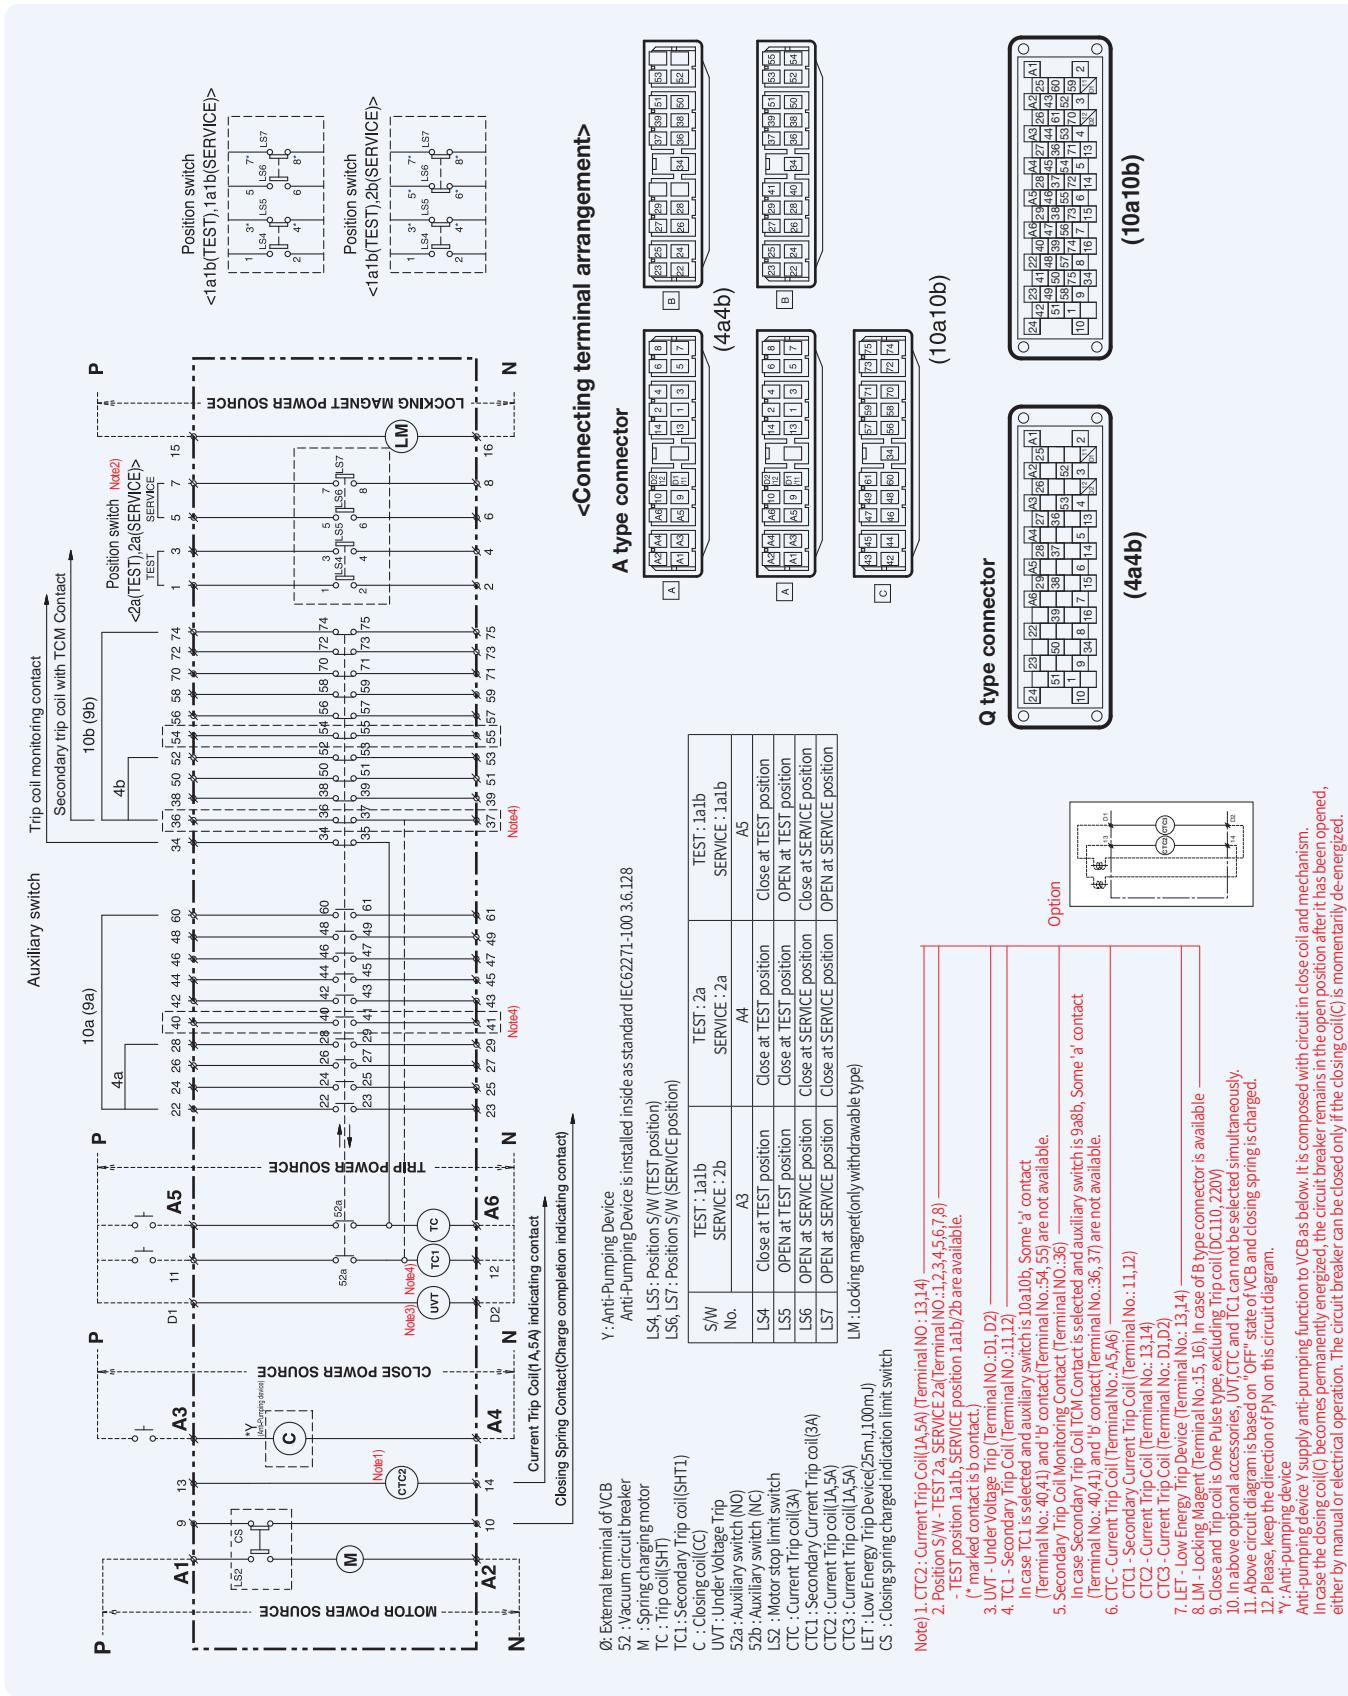



# Control circuit diagram - VH type

Susol VCB

VH-06/12/17/20/25/36

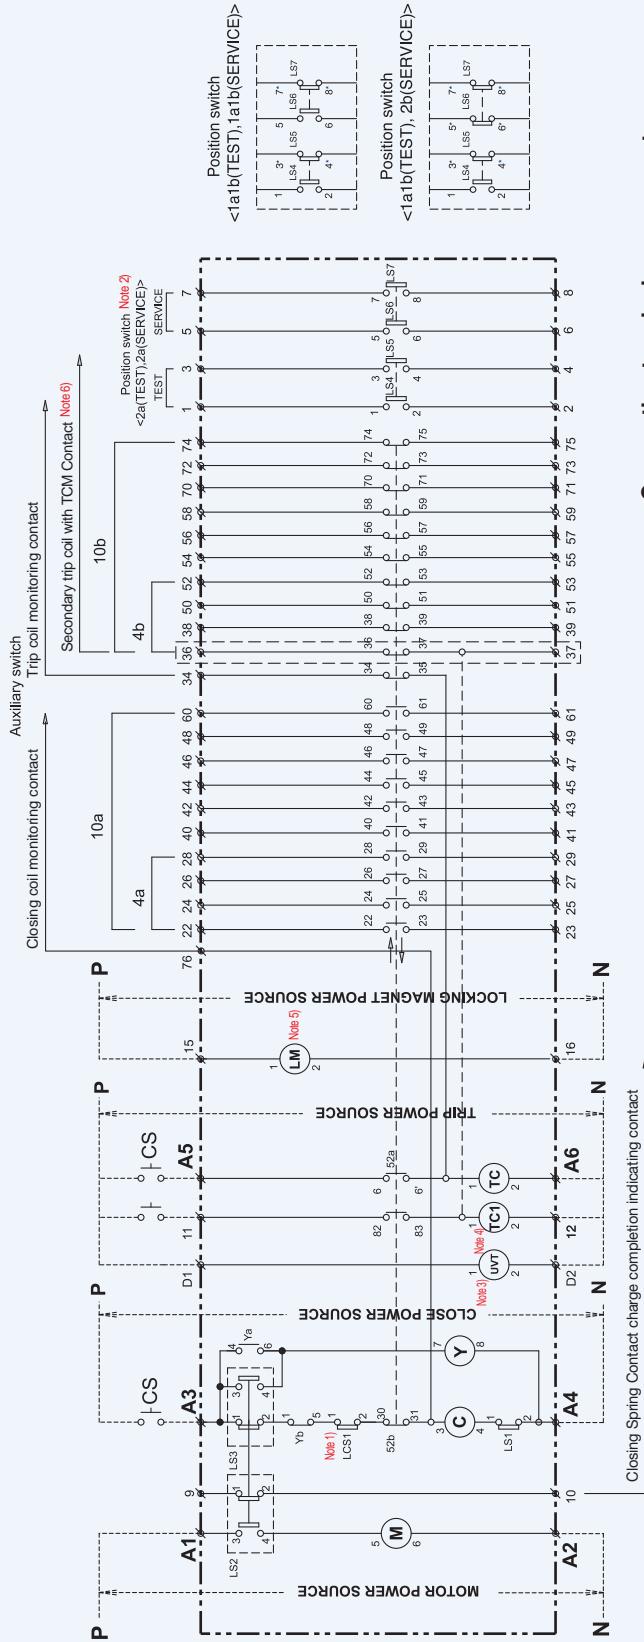

## <Connecting terminal arrangement>

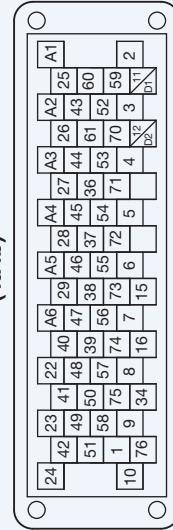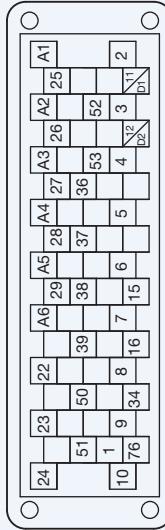

(4a)

(10a)

Option


S/W No.	TEST:1a/b		TEST:2a		TEST:1a/b	
	SERVICE:1a	SERVICE:2a	A4	A5	SERVICE:1a/b	SERVICE:1a/b
L54	Close at TEST position	Close at TEST position			Close at TEST position	Close at TEST position
L55	OPEN at TEST position	Open at TEST position			Open at TEST position	Open at TEST position
L56	OPEN at SERVICE position	Close at SERVICE position			Close at SERVICE position	Close at SERVICE position
L57	OPEN at SERVICE position	Close at SERVICE position			Open at SERVICE position	Open at SERVICE position

- 0: External terminal of VCB
- 52: Vacuum circuit breaker
- M: Spring charging motor
- T: Trip coil
- TC: Secondary trip coil
- C: Close coil
- Y: Anti-pump relay
- UVT: Under voltage trip
- 52a: Auxiliary switch (a)
- 52b: Auxiliary switch (b)
- L51: Close interlock limit switch (only withdrawable type)
- L52: Motor stop, close spring charged indication limit switch
- LM: Locking magnet (only withdrawable type)
- Note) 1. LCS1 : Latch Checking Switch —————— laib at TEST position and laib at SERVICE position are also available.  
(In case of laib "marked contact is b - normally open contact)
- 2. Position S/W - TEST 2a, SERVICE 2a(Terminal No. 1, 2, 3, 4, 5, 6, 7, 8)
- 3. UVT - Under-voltage Trip (Terminal No. D1, D2)
- 4. TC1 - Secondary Trip Coil (Spare trip coil, terminal No. 11, 12) ——————
- 5. LM - Locking Magnet (Terminal No. 15, 16), Type H only withdrawable type.  
b contact(36, 37) is not available if Trip coil monitoring contact is applied to Secondary trip Coil.
- 6. Secondary Trip Coil monitoring contact (Terminal No. 36) —————— b contact(36, 37) is not available if Trip coil monitoring contact is applied to Secondary trip Coil.
- 7. Above options TC1 and UVT can not be used simultaneously.
- 8. LS11(closing-interlock Limit switch) is not available for fixed version
- 9. Above circuit diagram is based on 'OFF' status of VCB and closing spring is charged.
- 10. Please make sure that keep the direction of P/N on this circuit diagram.

- Note) 1. LCS1 : Latch Checking Switch —————— laib at TEST position and laib at SERVICE position are also available.  
(In case of laib "marked contact is b - normally open contact)
2. Position S/W - TEST 2a, SERVICE 2a(Terminal No. 1, 2, 3, 4, 5, 6, 7, 8)
3. UVT - Under-voltage Trip (Terminal No. D1, D2)
4. TC1 - Secondary Trip Coil (Spare trip coil, terminal No. 11, 12) ——————
5. LM - Locking Magnet (Terminal No. 15, 16), Type H only withdrawable type.  
b contact(36, 37) is not available if Trip coil monitoring contact is applied to Secondary trip Coil.
6. Secondary Trip Coil monitoring contact (Terminal No. 36) —————— b contact(36, 37) is not available if Trip coil monitoring contact is applied to Secondary trip Coil.
7. Above options TC1 and UVT can not be used simultaneously.
8. LS11(closing-interlock Limit switch) is not available for fixed version
9. Above circuit diagram is based on 'OFF' status of VCB and closing spring is charged.
10. Please make sure that keep the direction of P/N on this circuit diagram.

# Control circuit diagram - VH type

## Compartment

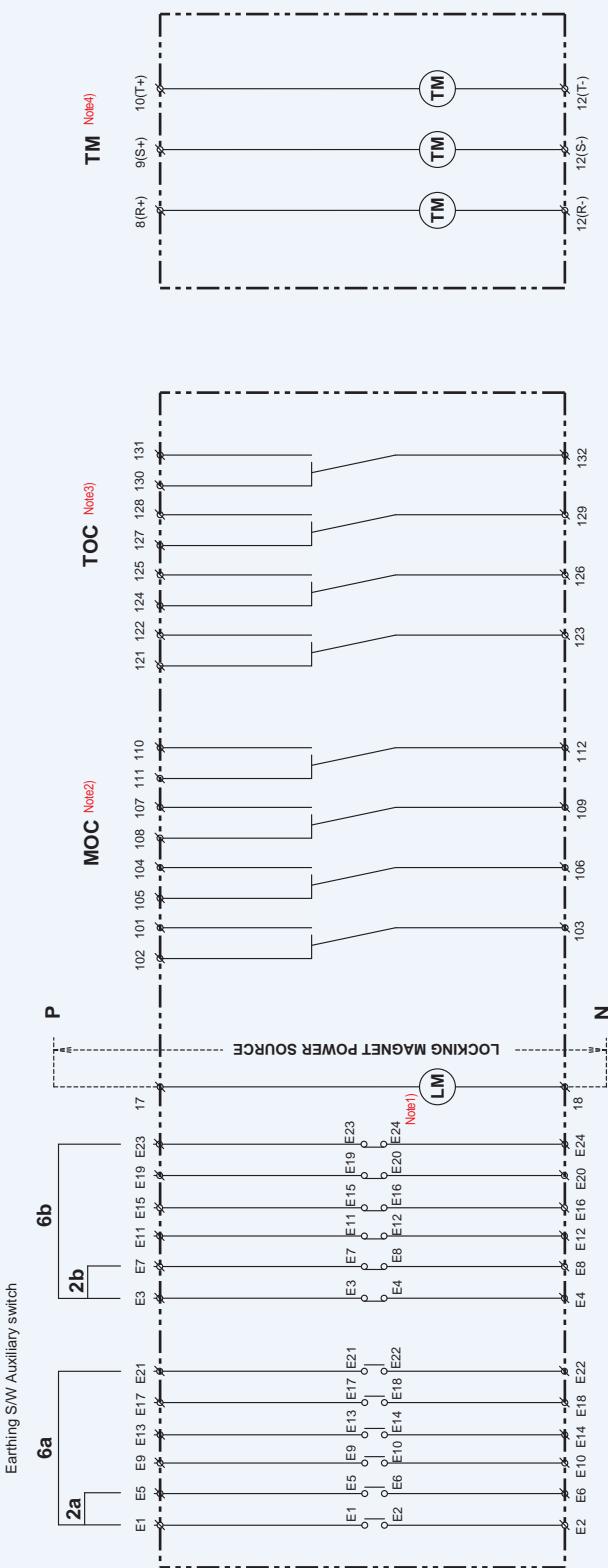

Ø: External terminals for auxiliary contacts and locking magnet  
 LM: Locking magnet for earthing switch  
 MOC: Mechanism operated cell switch (for H type cradle)  
 TOC: Truck operated cell switch (for H type cradle)  
 TM: Temperature alarm (for H type cradle)

Note) 1. LM - If it is energized with the rated power the earthing switch can be closed or opened (for H type cradle)

2. MOC: This auxiliary switch is used to indicate the Close/Open of VCB (for H type cradle)  
 It is composed of 4 cell switches with 4 changeover contacts.

3. TOC - This auxiliary switch is used to indicate the 'SERVICE' position of VCB (for H type cradle)  
 It is composed of 4 cell switches with 4 changeover contacts.

4. TM - Temperature Alarm Unit displays the input temperature detected through the temperature sensor installed in H-type cradle. Temperature sensor can be installed in each phase and can be connected with the temperature module.

5. Please make sure that keep the direction of P, N on this circuit diagram.

\* Above circuit diagram is based on the status that the earthing S/W is Open and the breaker is at Test or between Test and Service position. MOC indicates the Open of the breaker. If the breaker is Closed from Service, the contacts configuration is displayed on the contrary.

Option




# Dimensions - VL type (VL-06)

Susol VCB

## 7.2kV, 8/12.5kA, 400/630A




### Fixed

#### ■ P type, phase distance 130mm

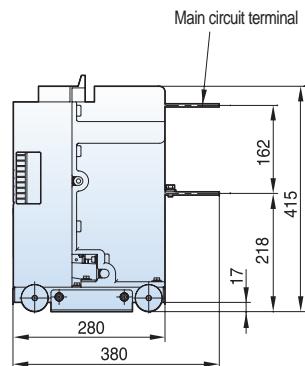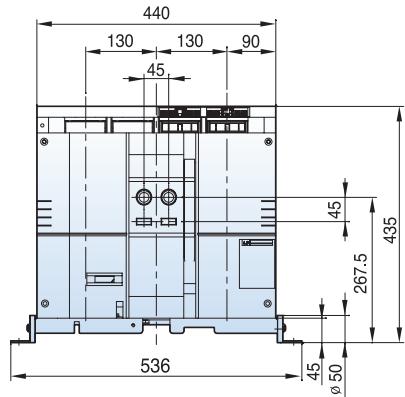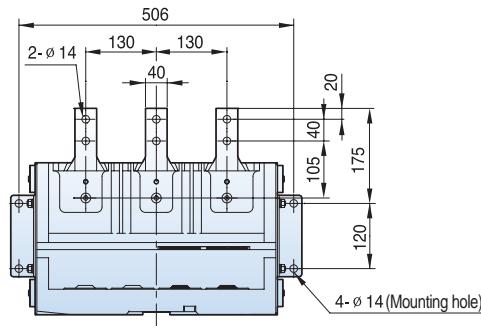

### Withdrawable

#### ■ Standard breaker E/F/G type, phase distance 130mm

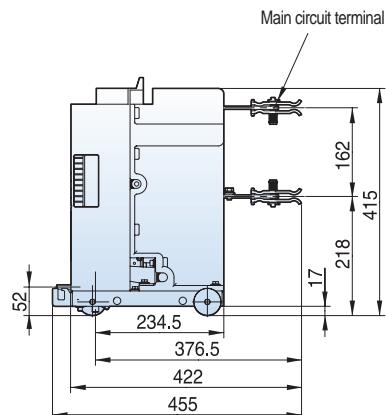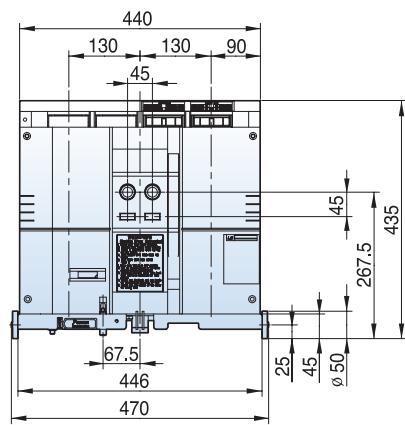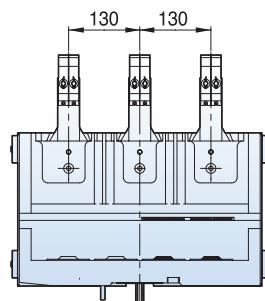


# Dimensions - VL type (VL-06)

**7.2kV, 8/12.5kA, 400/630A**


**Withdrawable**

■ Compatible with existing breaker E/F/G type, phase distance 130mm

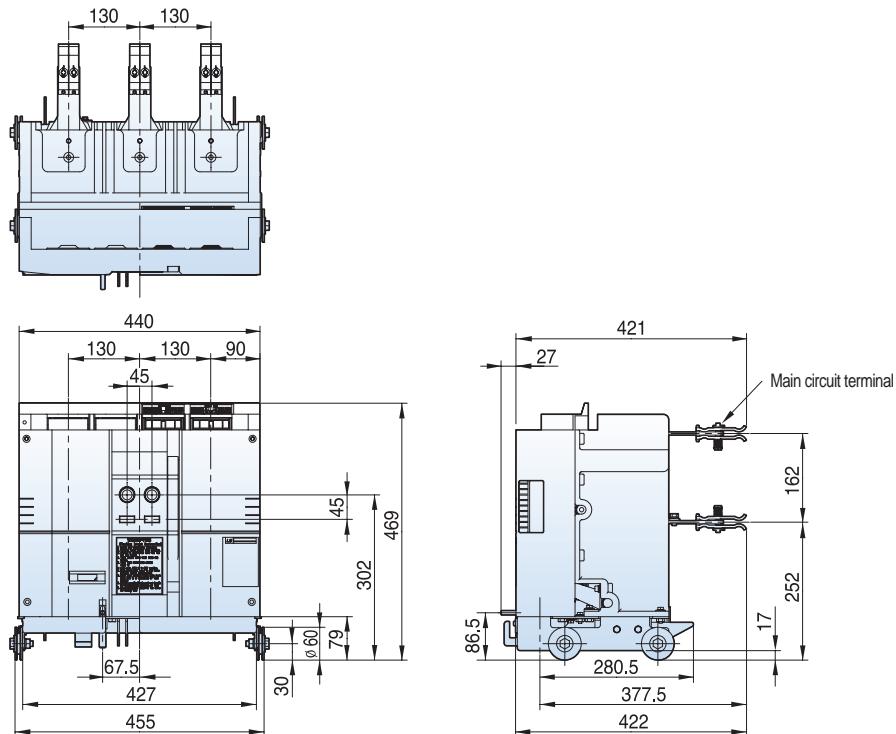

**Withdrawable**


■ E type cradle, phase distance 130mm

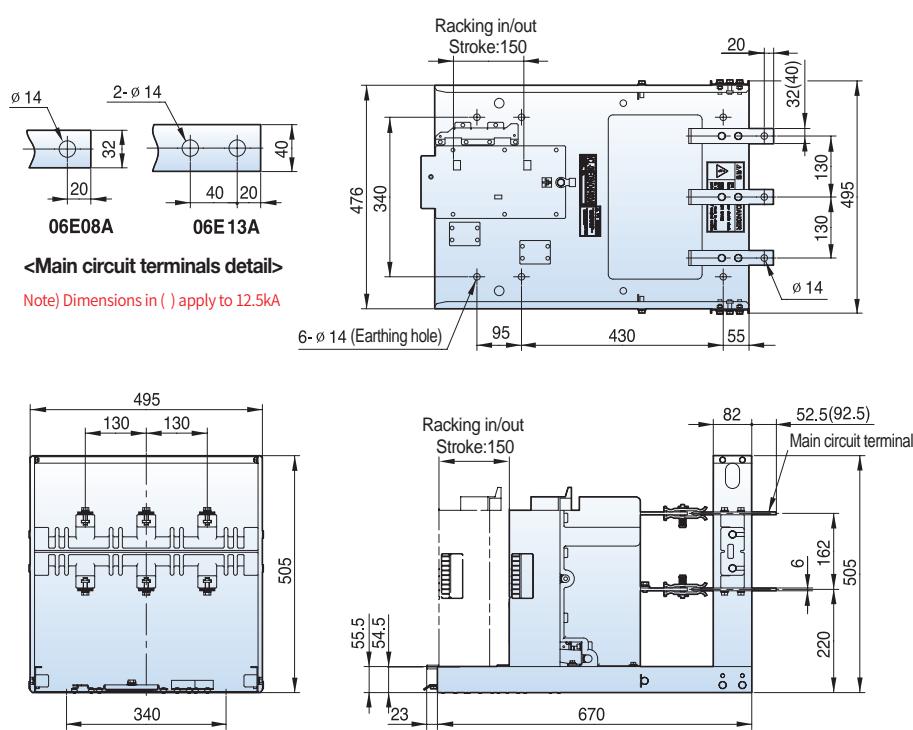

## 7.2kV, 8/12.5kA, 400/630A


### Withdrawable

#### ■ F type cradle, phase distance 130mm

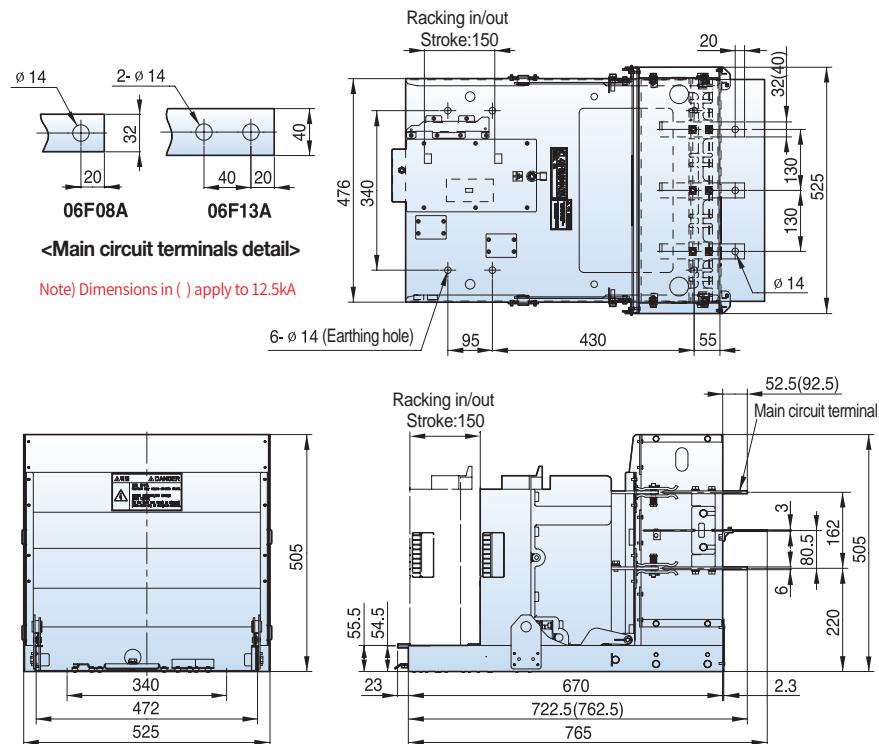

### Withdrawable

#### ■ G type cradle, phase distance 130mm

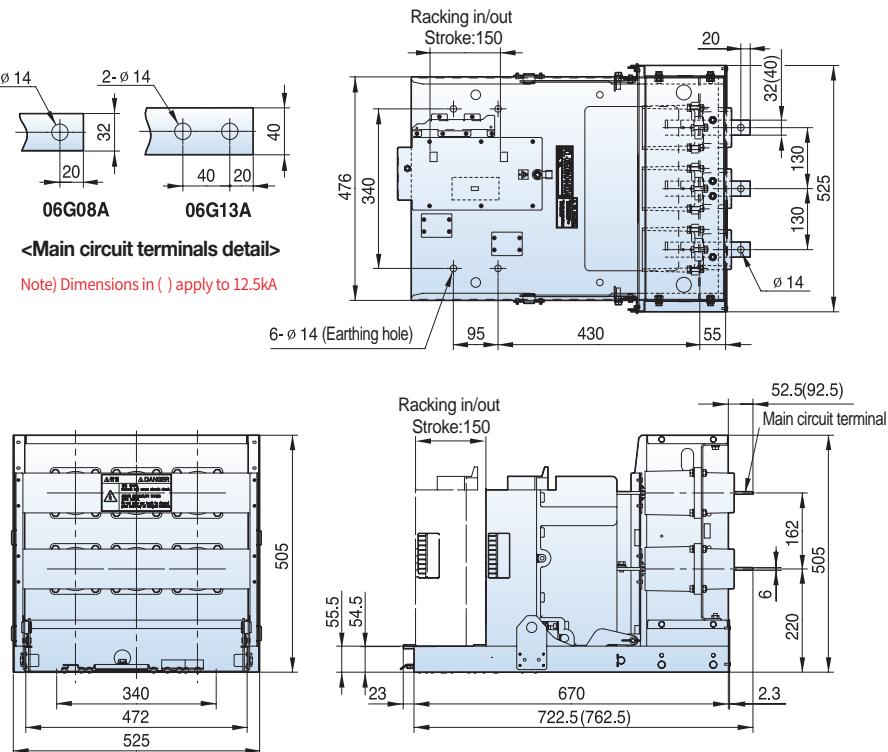


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 630/1250A**

## Fixed


### ■ P type, phase distance 150mm

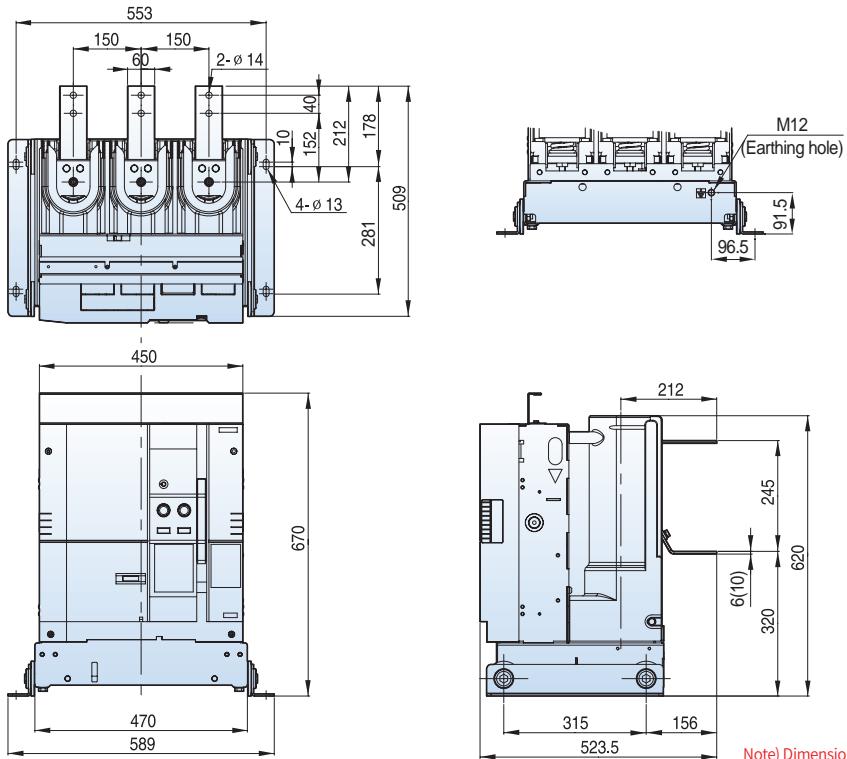

Note) Dimensions in ( ) apply to 1250A

## Withdrawable

### ■ E type unit, phase distance 150mm

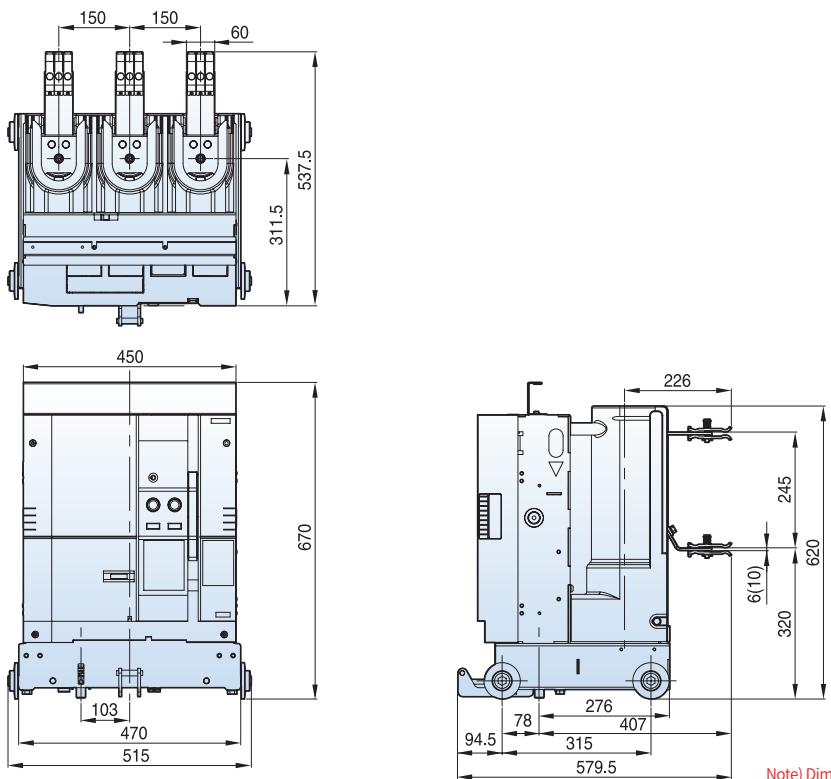


Note) Dimensions in ( ) apply to 1250A

## 7.2kV, 20/25kA, 630/1250A

### Withdrawable


#### ■ F type unit, phase distance 150mm

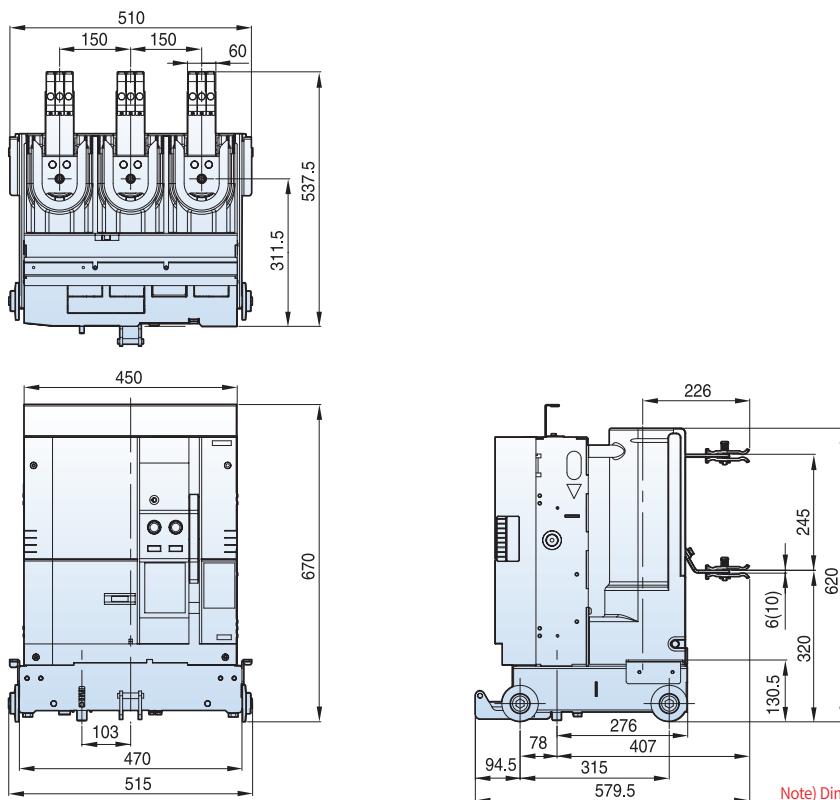

Note) Dimensions in ( ) apply to 1250A

### Withdrawable

#### ■ G type unit, phase distance 150mm

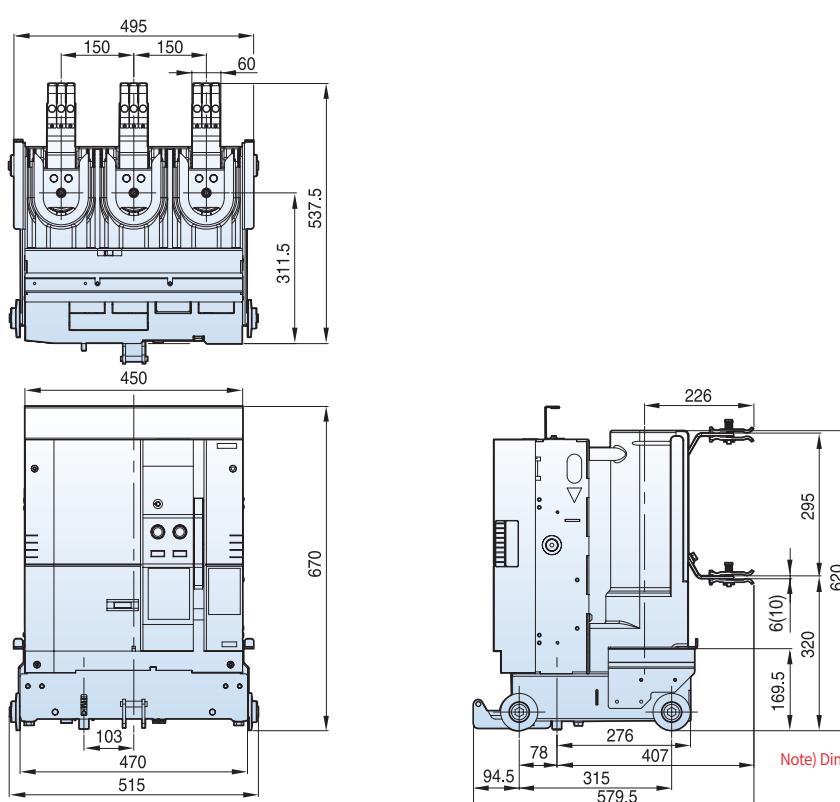




Note) Dimensions in ( ) apply to 1250A

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 630/1250A**




**Withdrawable**

■ K type unit T type, phase distance 150mm

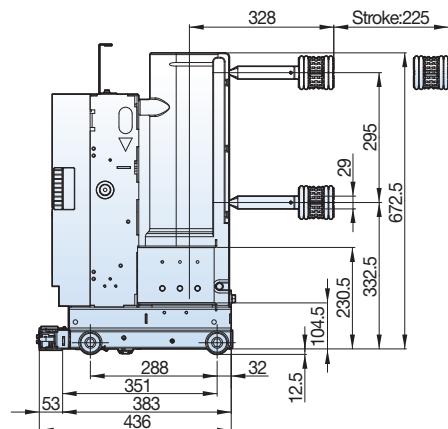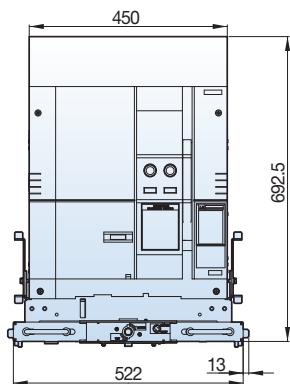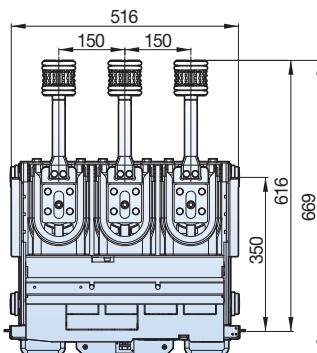

**Withdrawable**

■ K type unit T2 type, phase distance 150mm

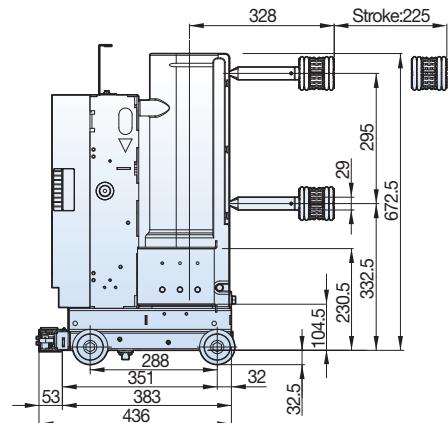
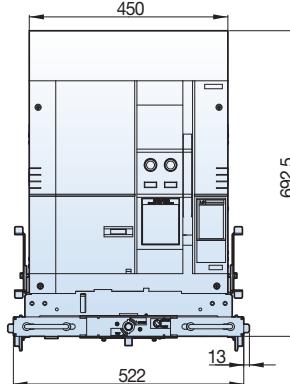
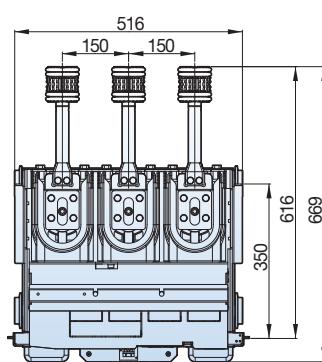


## 7.2kV, 20/25kA, 630/1250A

### Withdrawable

#### E type cradle, phase distance 150mm

Rating	630A	1250A
A	6	10
B	55	60
C	95	90

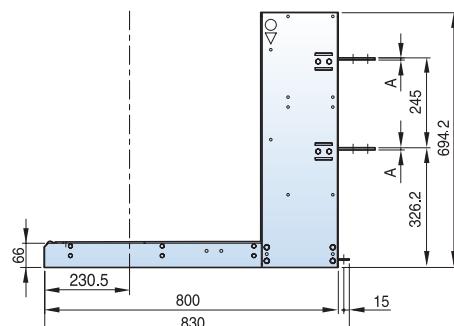
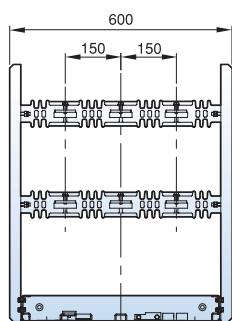
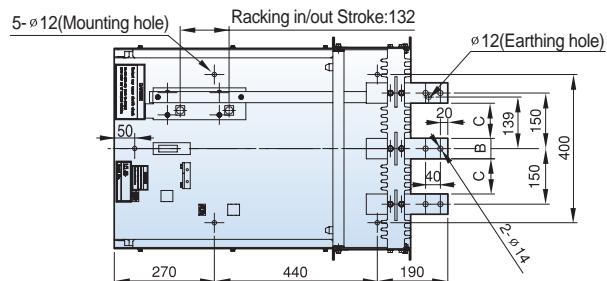


\* Please be informed that the switchgear IP cover has to be back of —— mark.

### Withdrawable

#### F type cradle, phase distance 150mm

Rating	630A	1250A
A	6	10
B	55	60
C	95	90

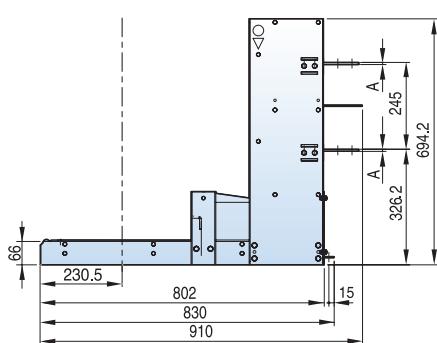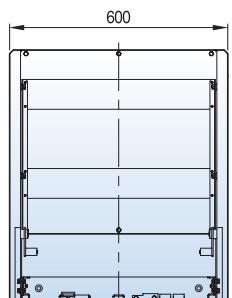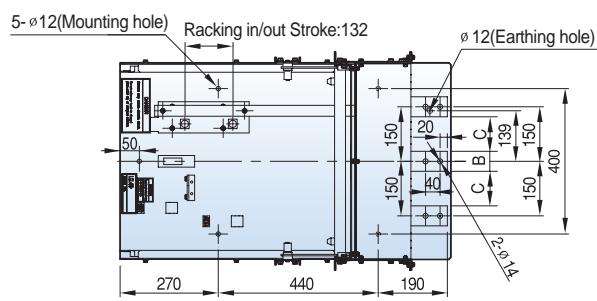


\* Please be informed that the switchgear IP cover has to be back of —— mark.

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 630/1250A**

## Withdrawable


### G type cradle, phase distance 150mm

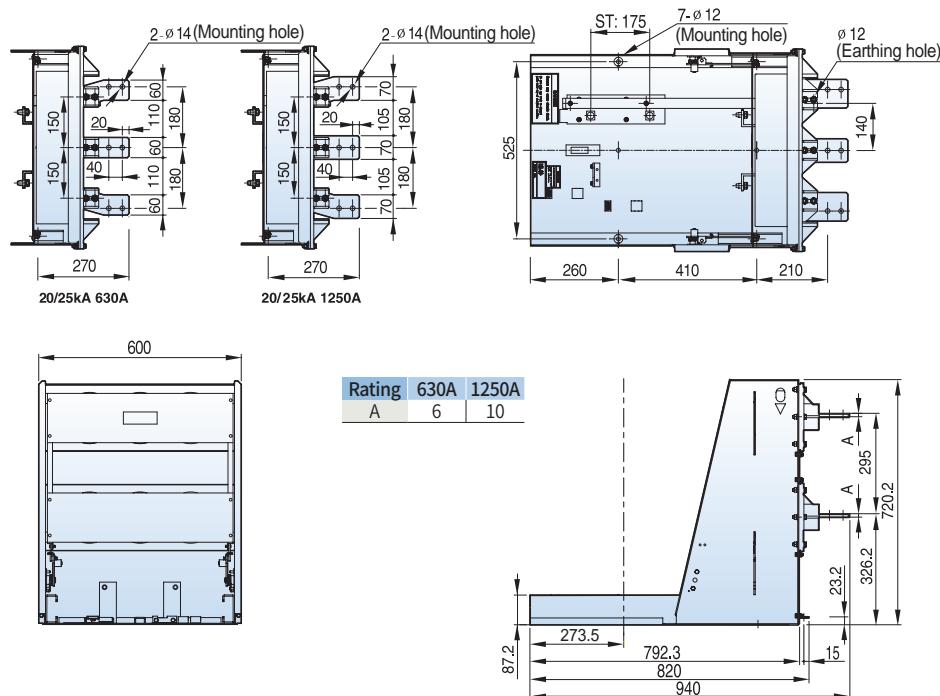

\* Please be informed that the switchgear IP cover has to be back of —— mark.

## Withdrawable



### H type unit, phase distance 150mm

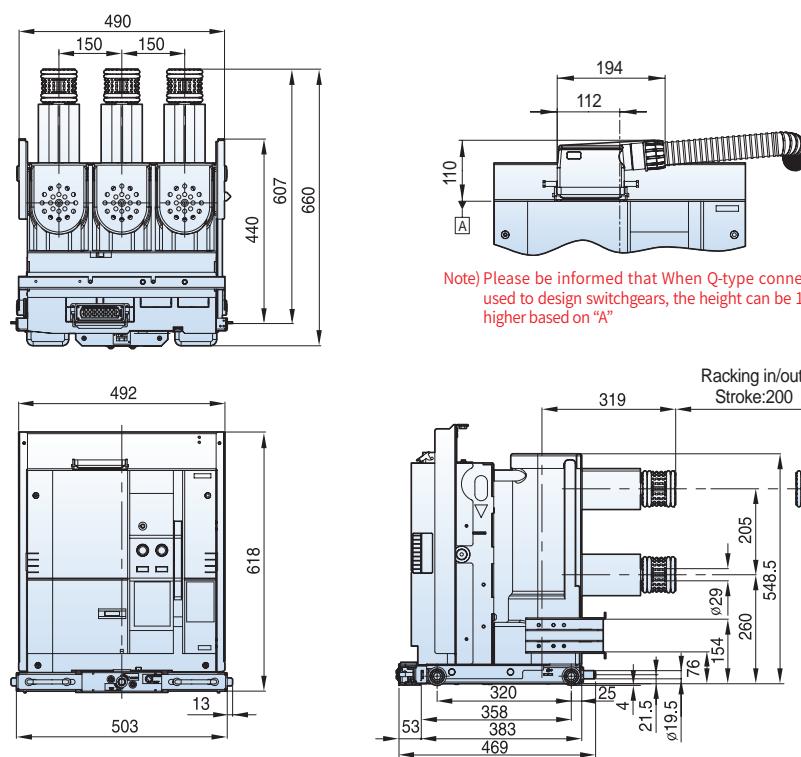

Note) Please be informed that When Q-type connector is used to design switchgears, the height can be 110mm higher based on "A"

**7.2kV, 20/25kA, 630/1250A****Withdrawable****■ Ha type cradle, phase distance 150mm**

Type
VCL-06Ha20A06
VCL-06Ha20A13
VCL-06Ha25A06
VCL-06Ha25A13

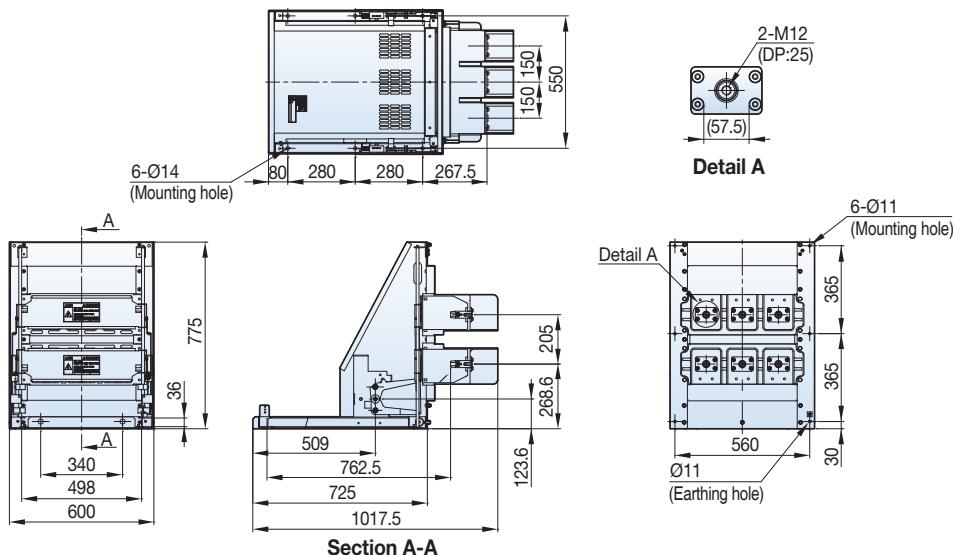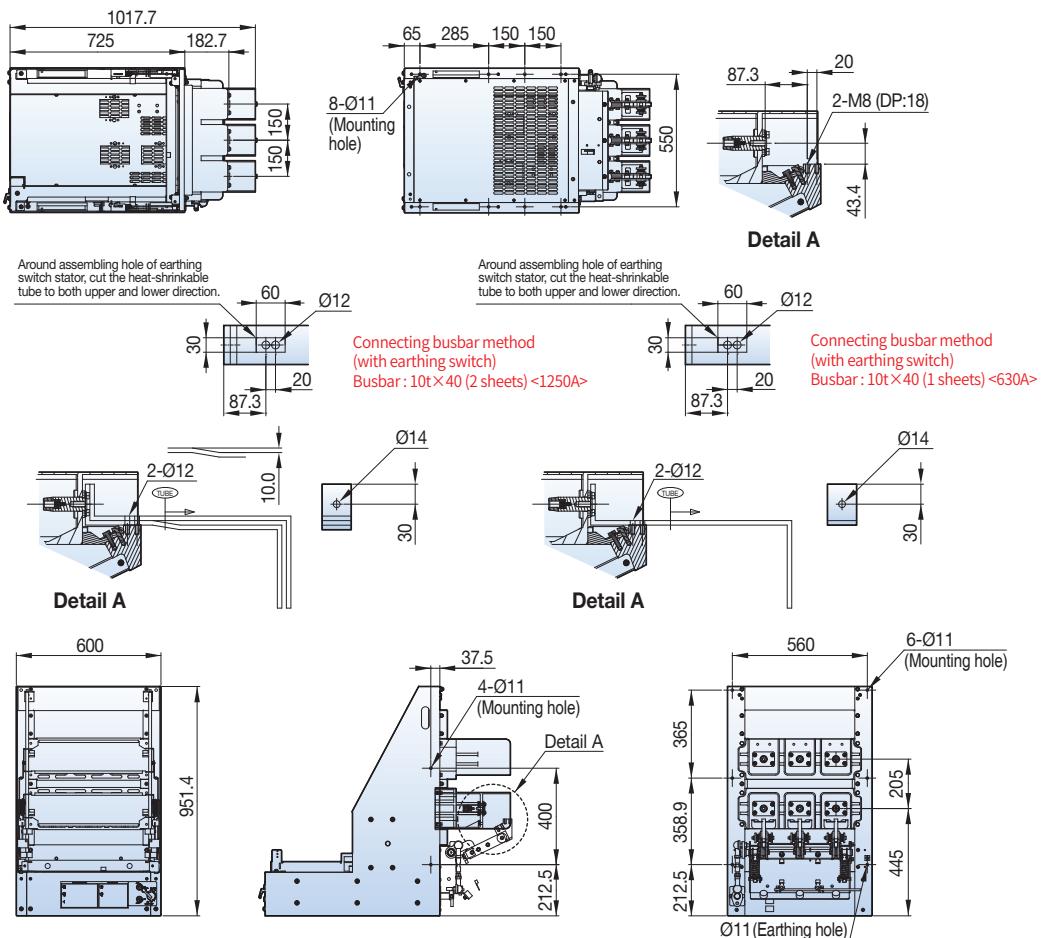
**■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 630/1250A**

**Withdrawable**


■ H type cradle, phase distance 150mm

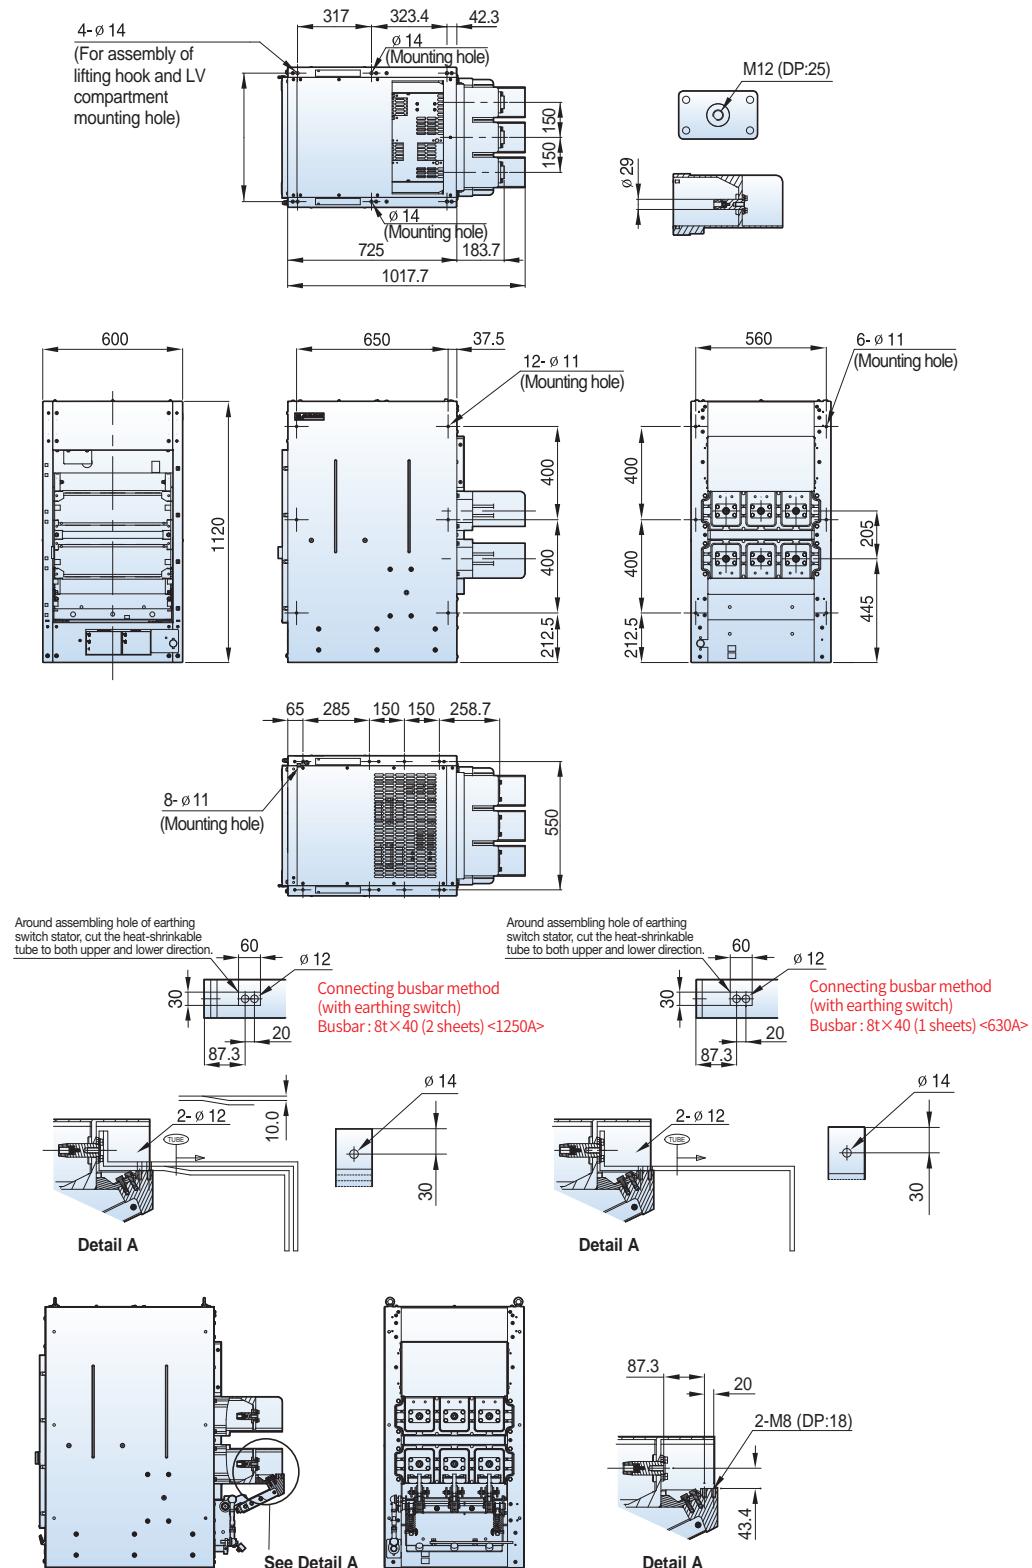

## 7.2kV, 20/25kA, 2000A


**Fixed**

■ P type, phase distance 150mm

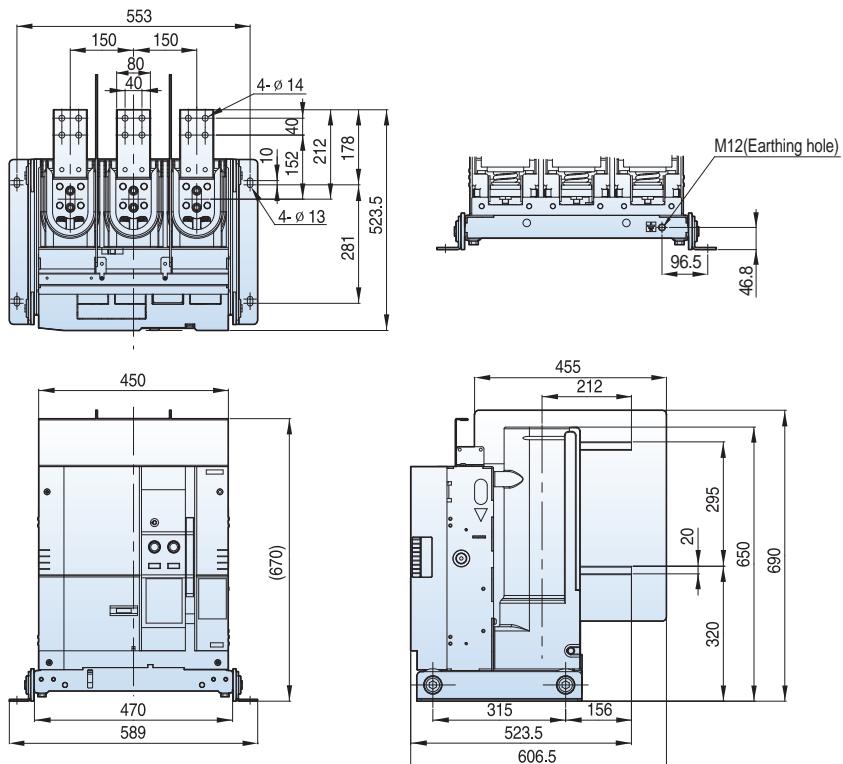

**Withdrawable**

■ E type unit, phase distance 150mm



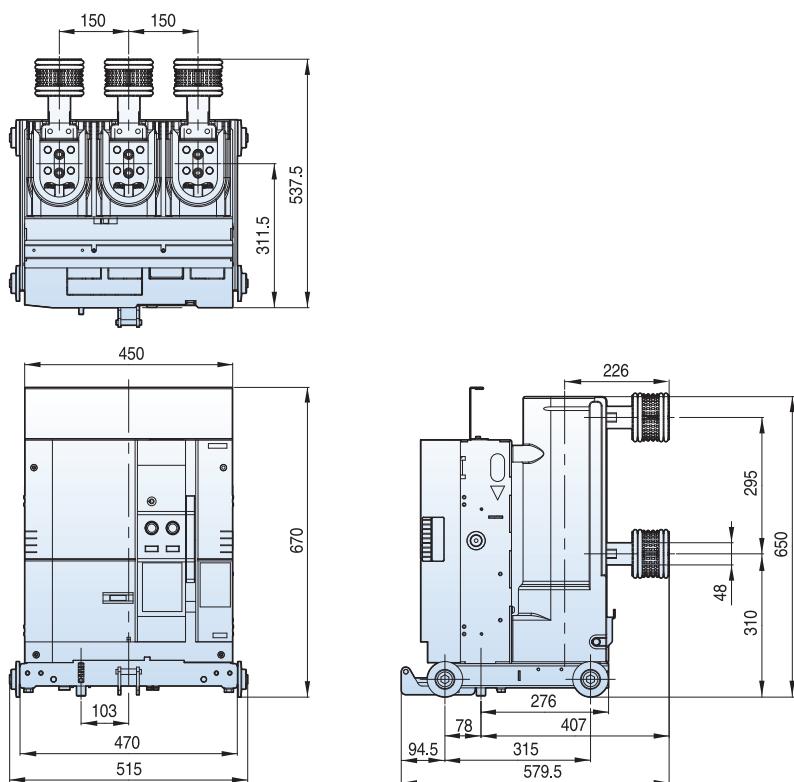


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 2000A**




**Withdrawable**

■ F/G type unit, phase distance 150mm

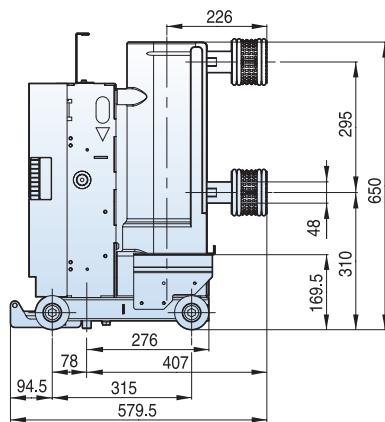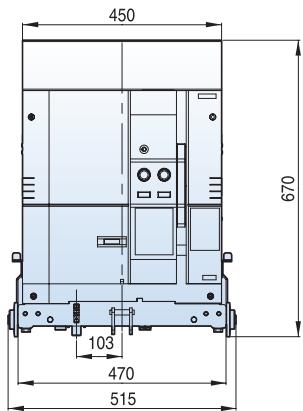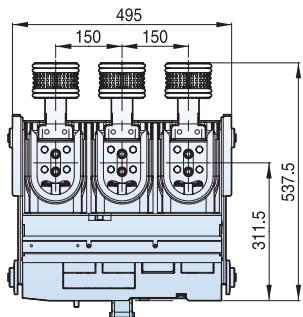

**Withdrawable**




■ K type unit T type, phase distance 150mm

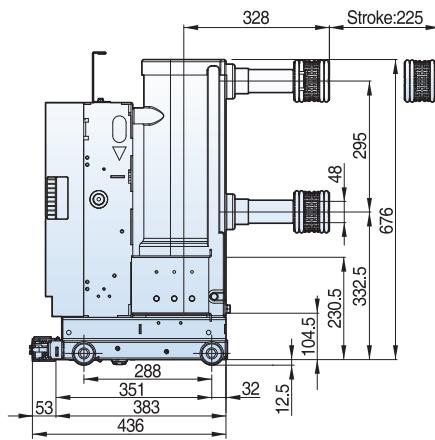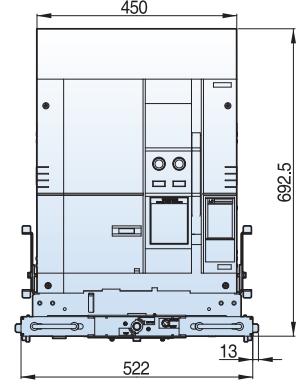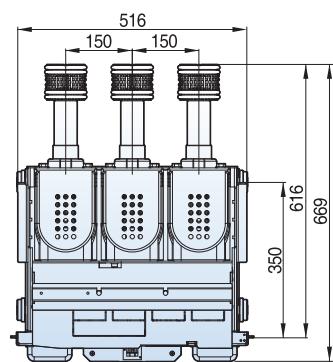

## 7.2kV, 20/25kA, 2000A





**Withdrawable**

■ K type unit T2 type, phase distance 150mm

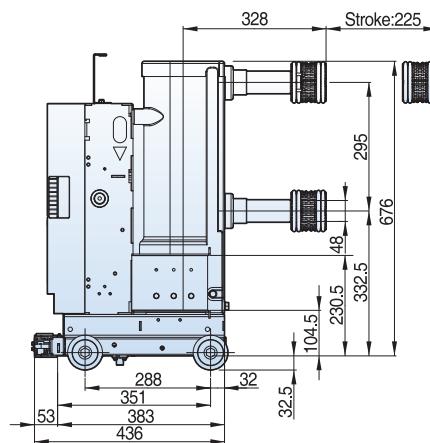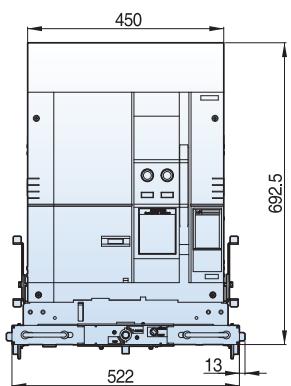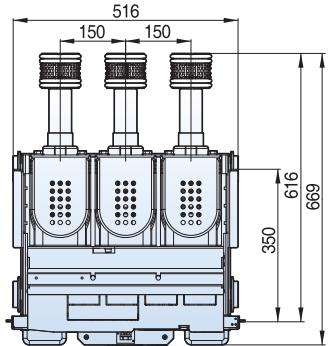

**Withdrawable**

■ E type cradle, phase distance 150mm

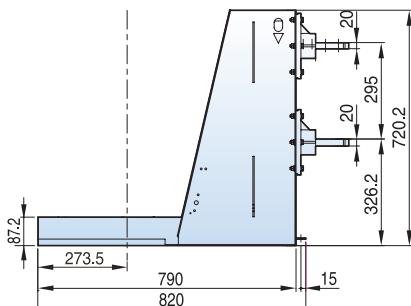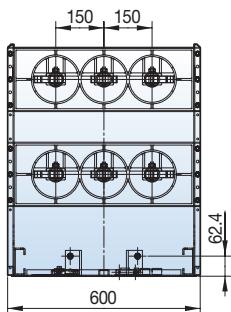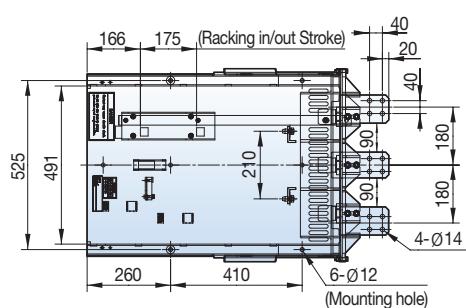





\* Please be informed that the switchgear IP cover has to be back of —— mark.

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 2000A**

## Withdrawable





### ■ F type cradle, phase distance 150mm

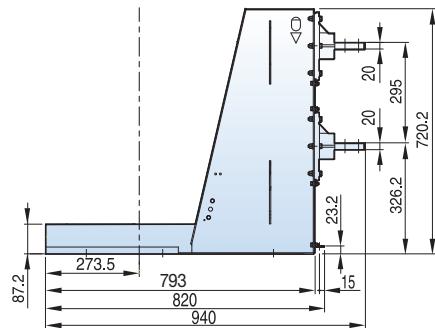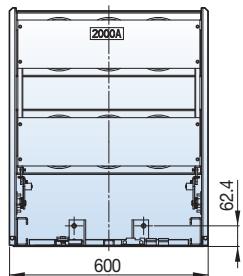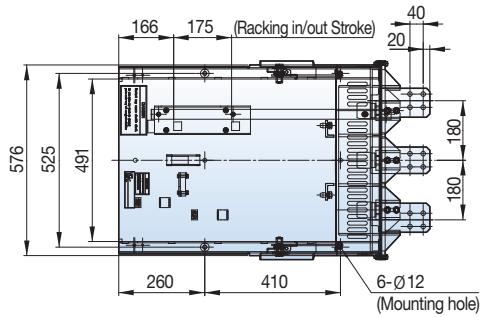

\* Please be informed that the switchgear IP cover has to be back of —— mark.

## Withdrawable

### ■ G type cradle, phase distance 150mm

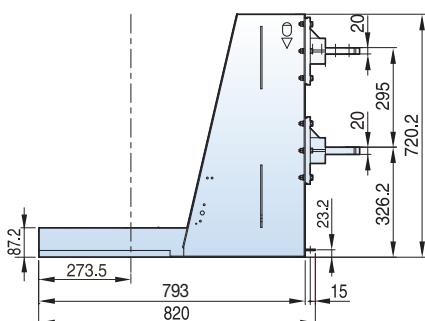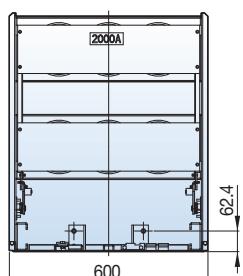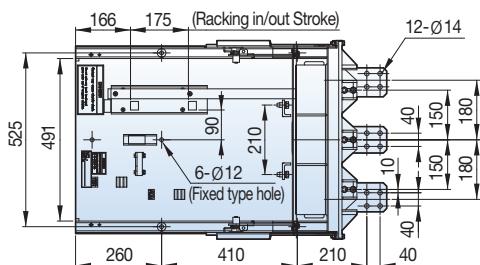
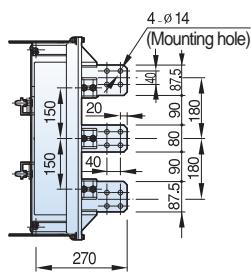


\* Please be informed that the switchgear IP cover has to be back of —— mark.



## 7.2kV, 20/25kA, 2000A

**Withdrawable**

■ H type unit, phase distance 150mm

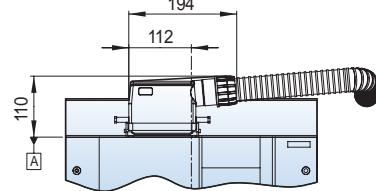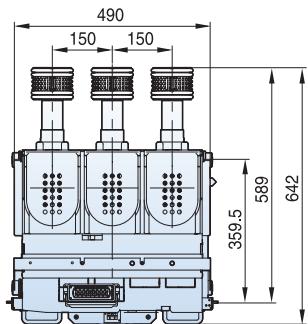

Note) Please be informed that When Q-type connector is used to design switchgears, the height can be 110mm higher based on "A"

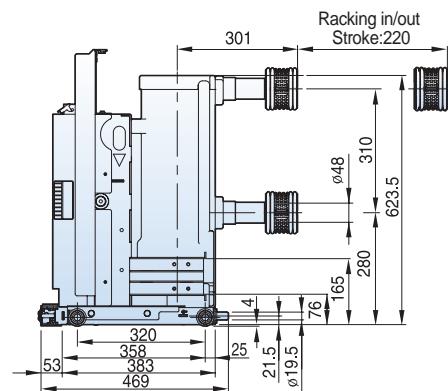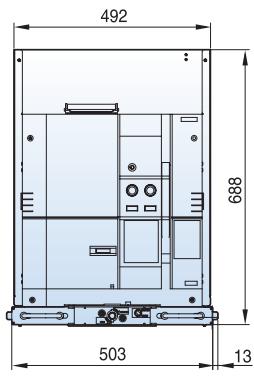


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 20/25kA, 2000A**


## Withdrawable

### ■ Ha type cradle, phase distance 150mm

Type
VCL-06Ha20A20
VCL-06Ha25A20

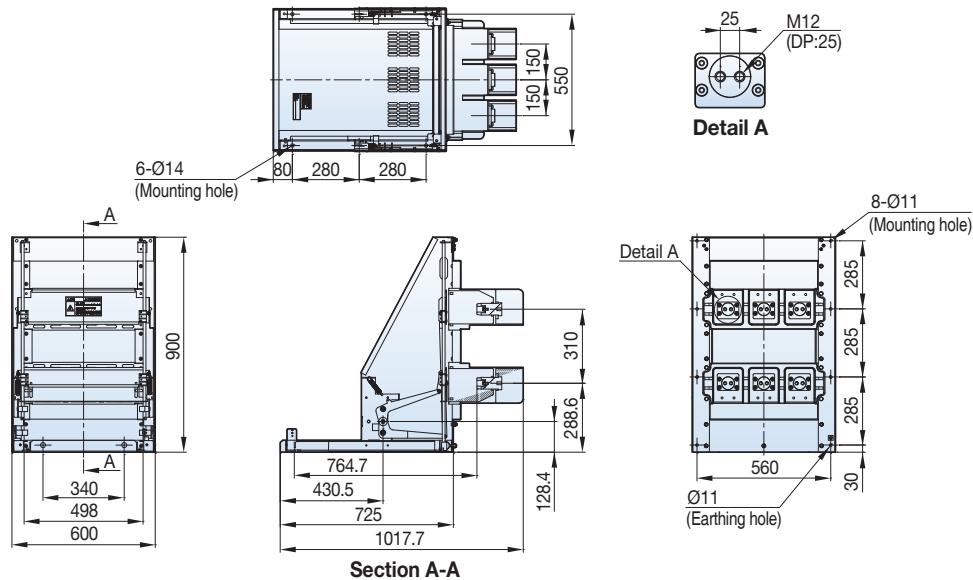


### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

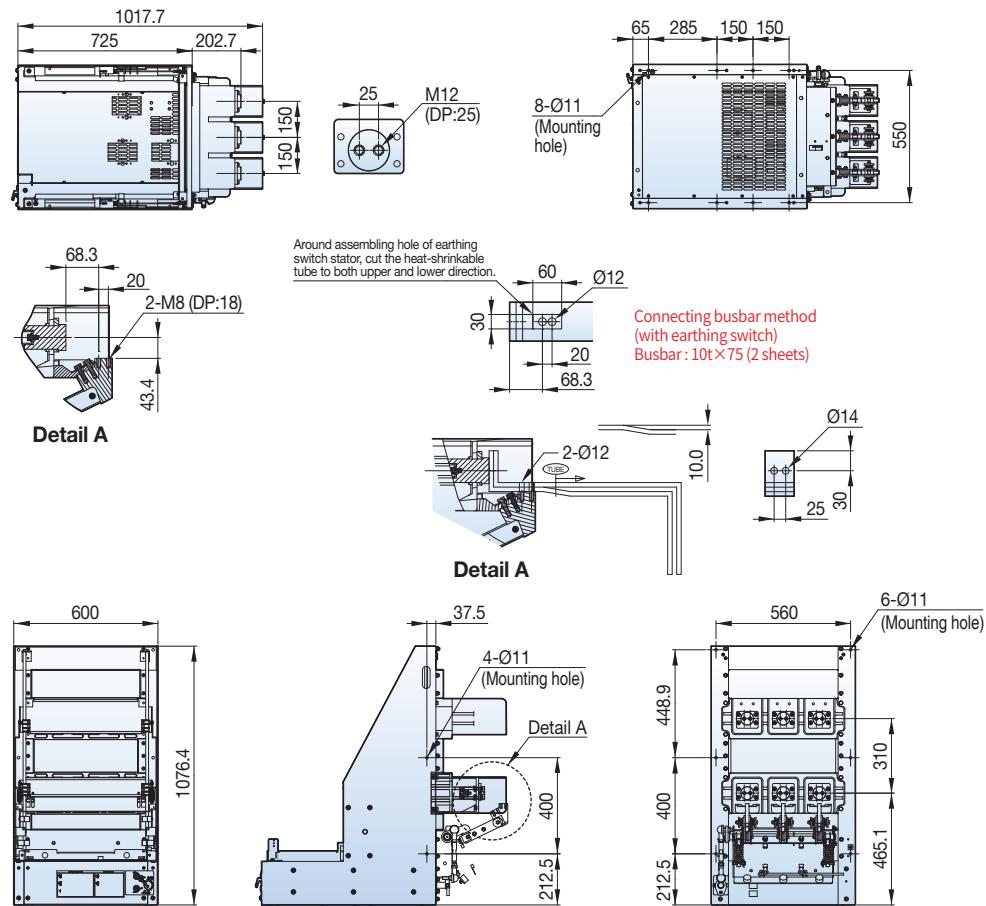

## 7.2kV, 20/25kA, 2000A

### Withdrawable

#### H type cradle, phase distance 150mm

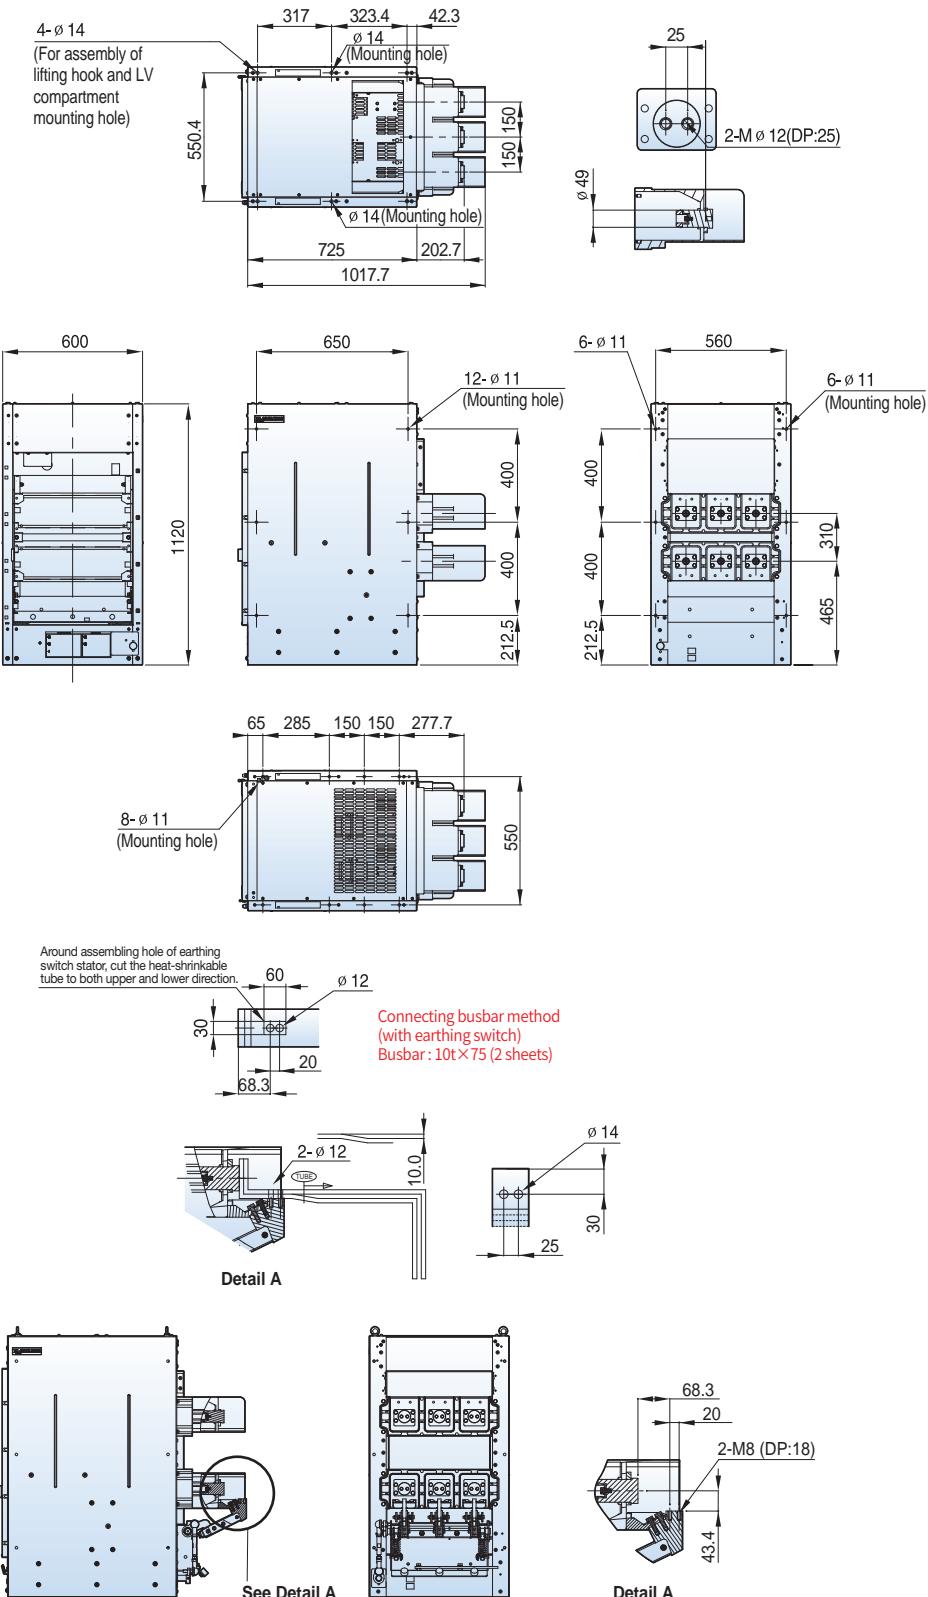


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 630A**



## Fixed

### ■ P type, phase distance 150mm

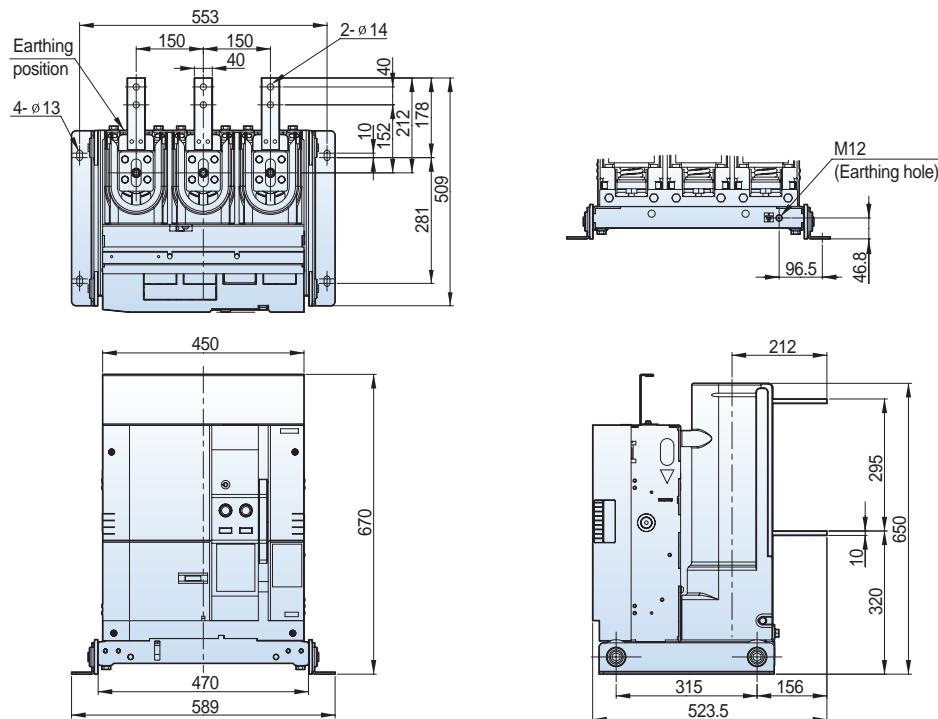

## Withdrawable

### ■ H type unit, phase distance 150mm

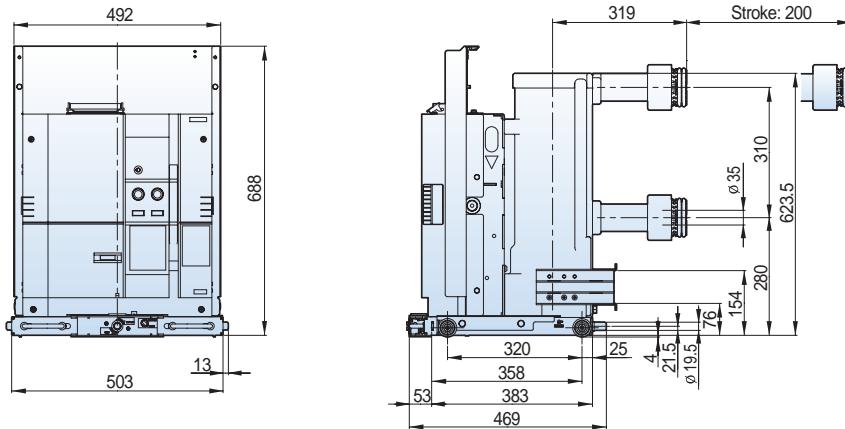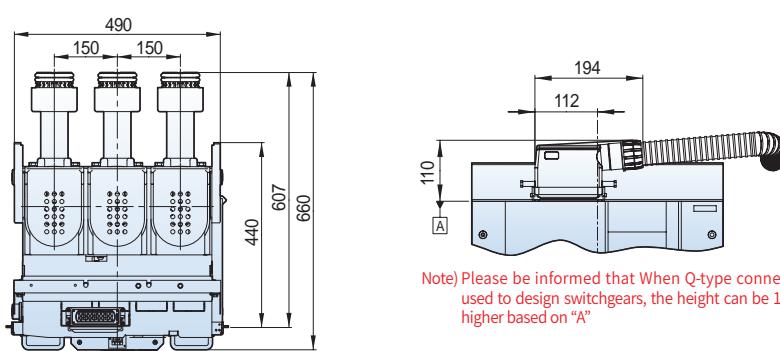


## 7.2kV, 31.5kA, 630A


### Withdrawable

#### ■ Ha type cradle, phase distance 150mm

Type  
VCL-06Ha32A06

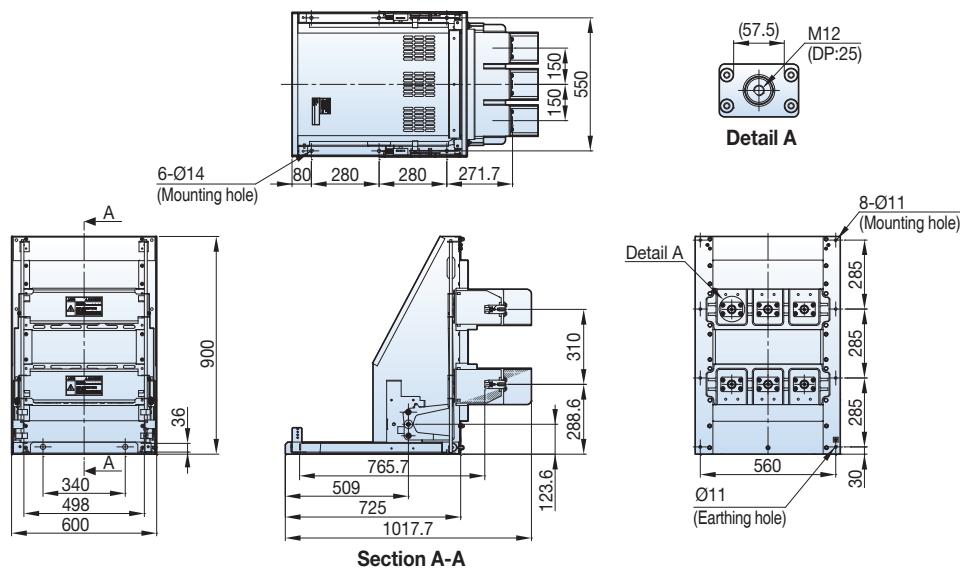

#### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

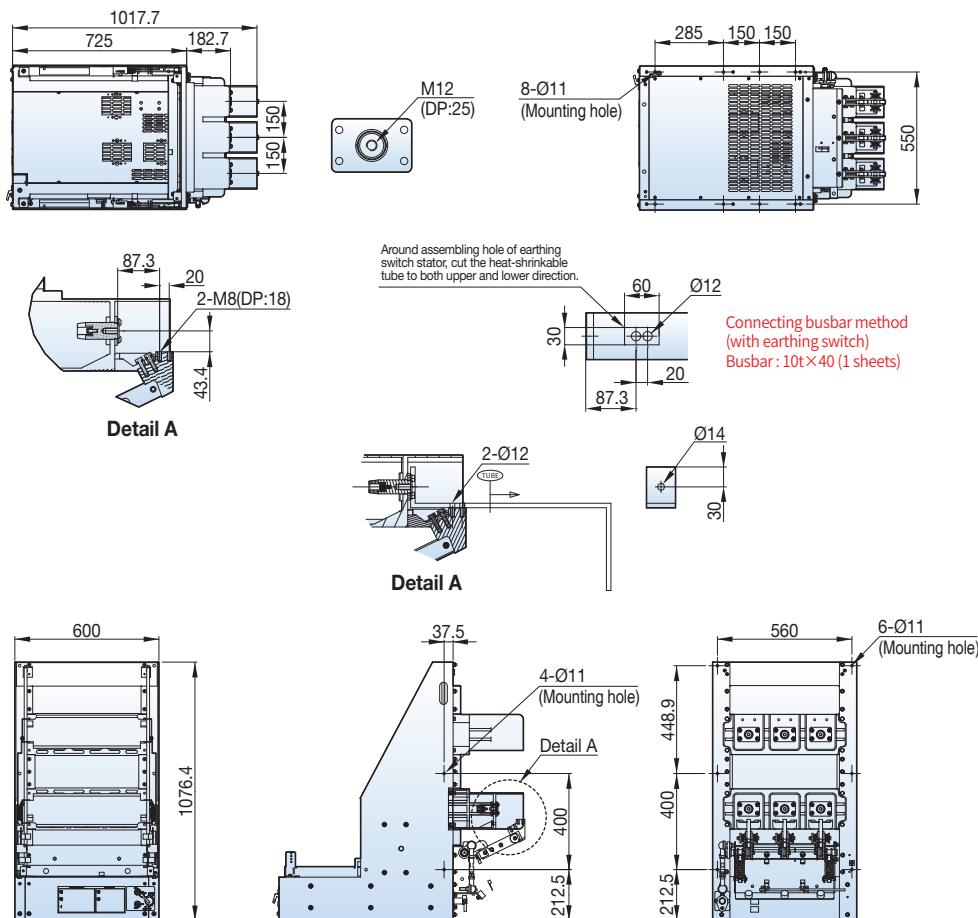




# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 630A**

**Withdrawable**

■ H type cradle, phase distance 150mm

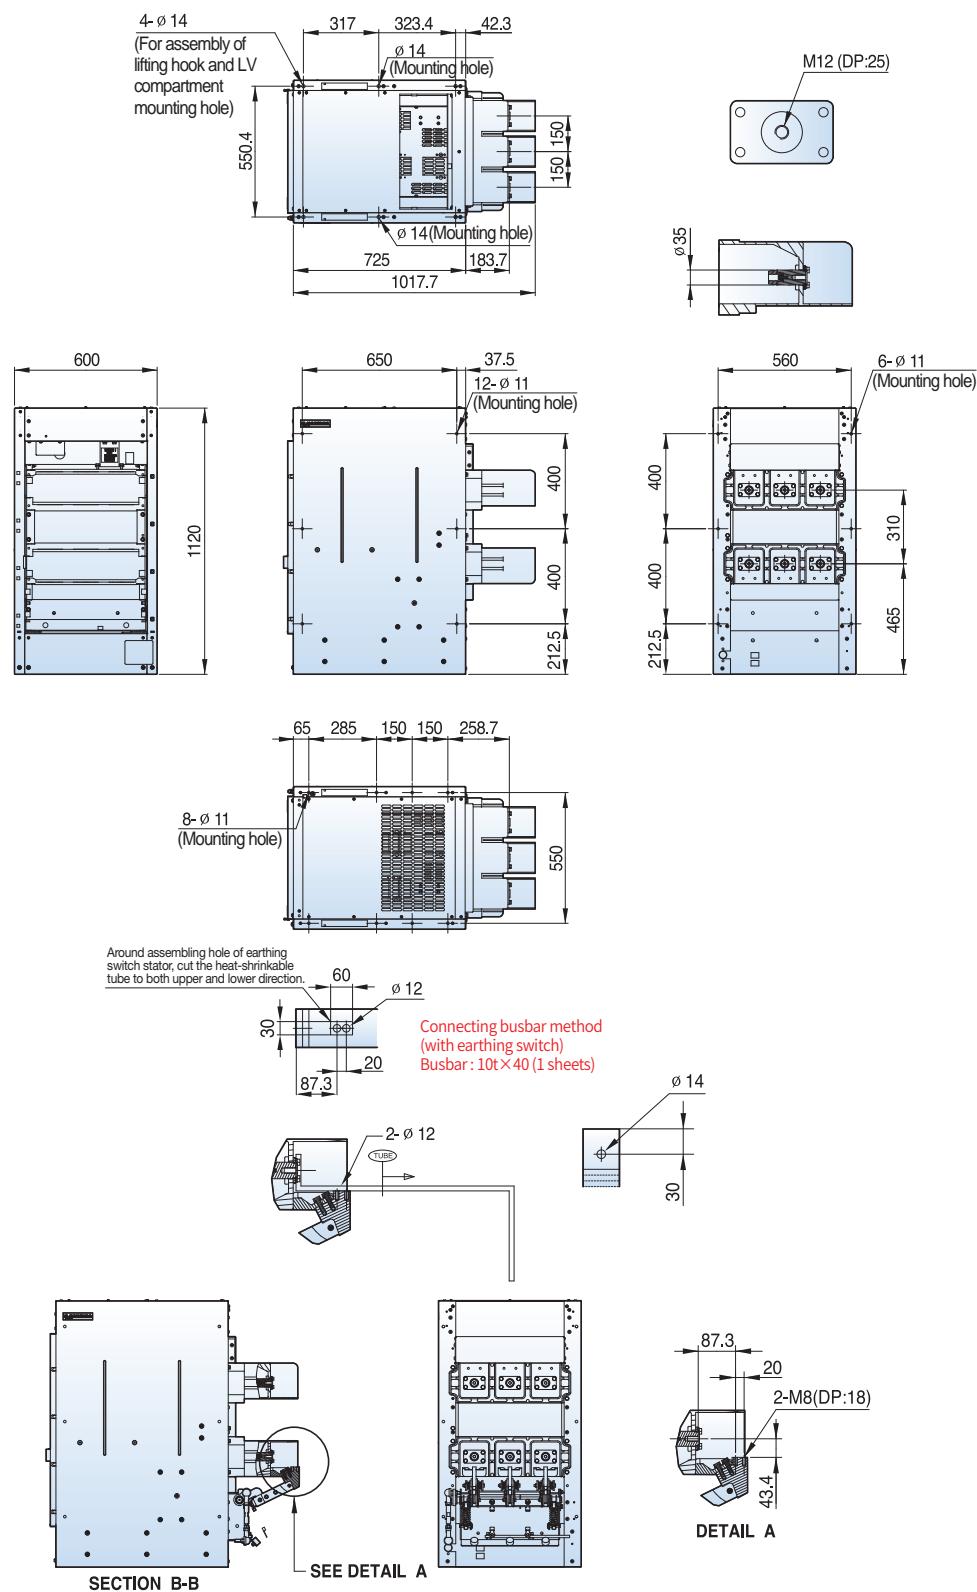


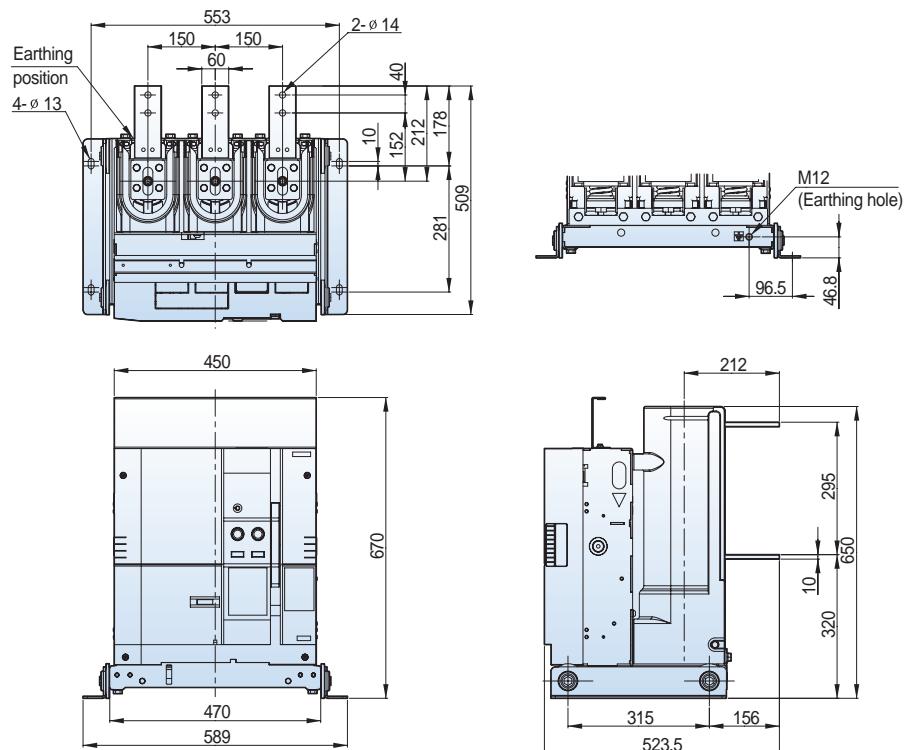
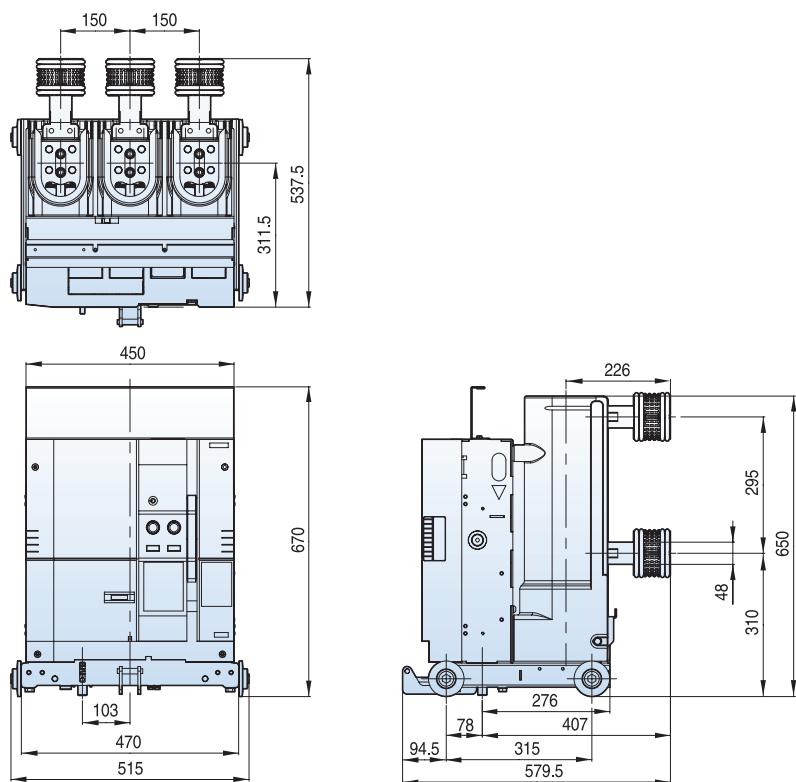
**7.2kV, 31.5kA, 1250A****Fixed****■ P type, phase distance 150mm****Withdrawable****■ E type unit, phase distance 150mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 1250A**





**Withdrawable**

■ F/G type unit, phase distance 150mm

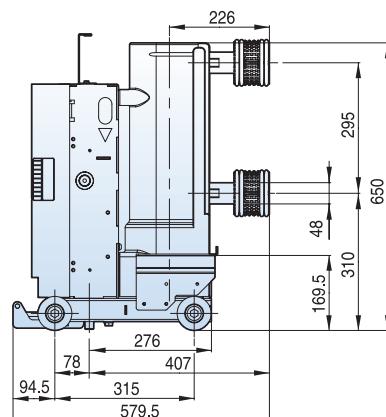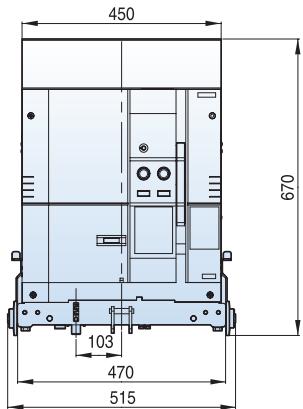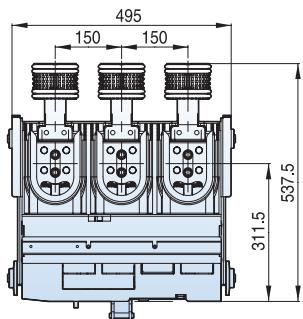

**Withdrawable**





■ E type cradle, phase distance 150mm

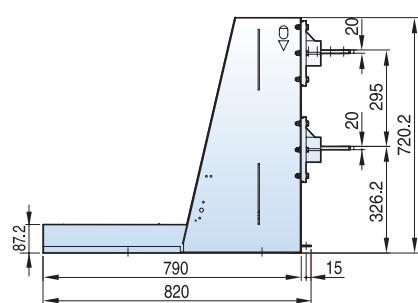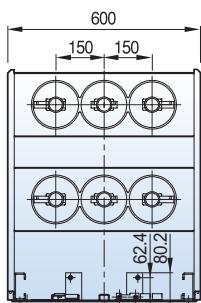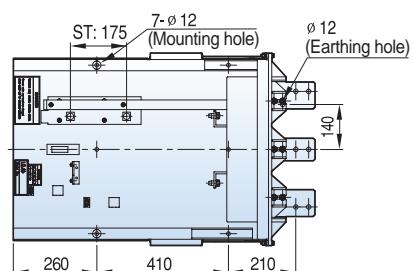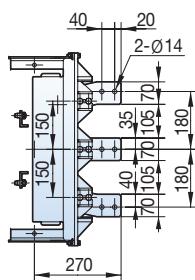

## 7.2kV, 31.5kA, 1250A





**Withdrawable**

### ■ F type cradle , phase distance 150mm

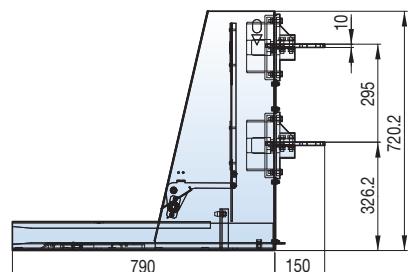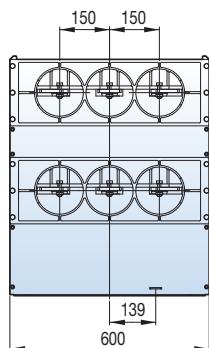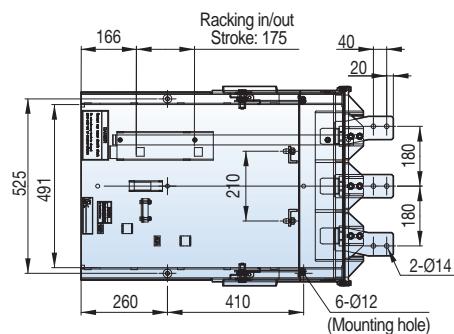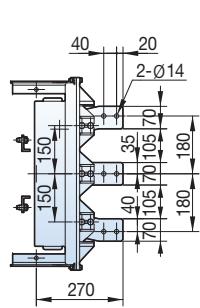

**Withdrawable**

### ■ G type cradle, phase distance 150mm

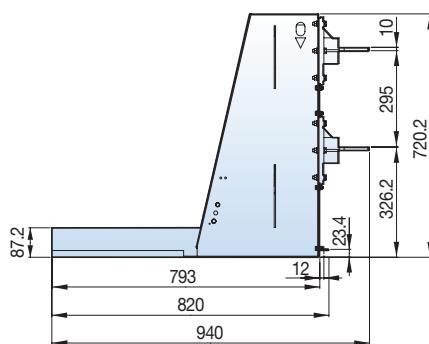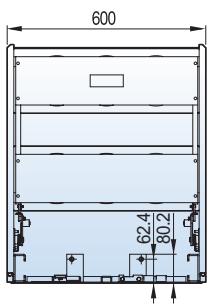
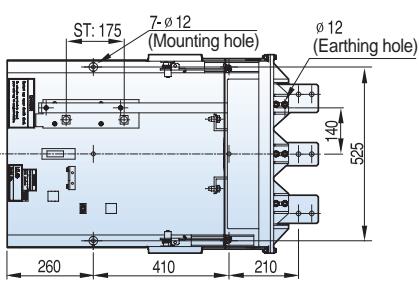
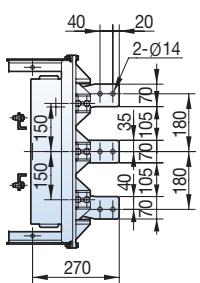


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 1250A**




**Withdrawable**

■ K type unit T type, phase distance 150mm

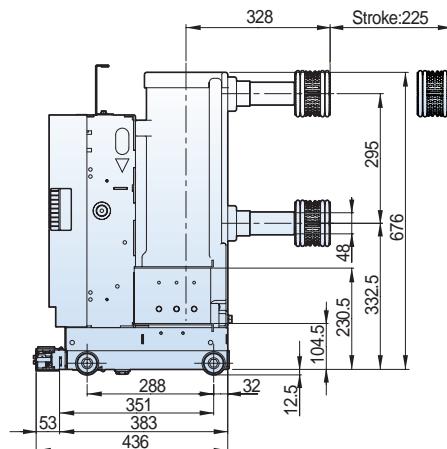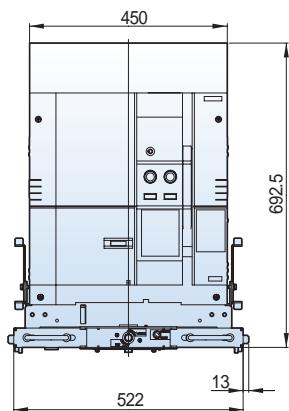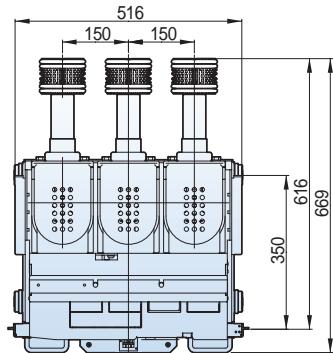

**Withdrawable**


■ K type unit T2 type, phase distance 150mm

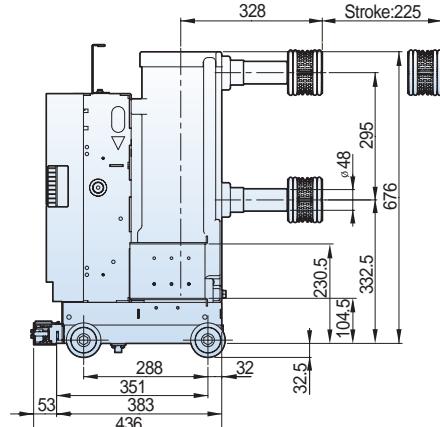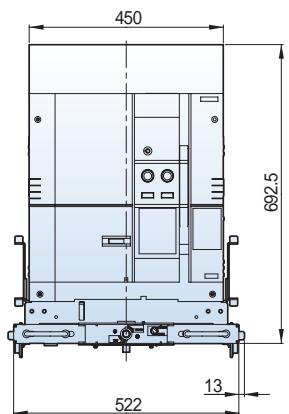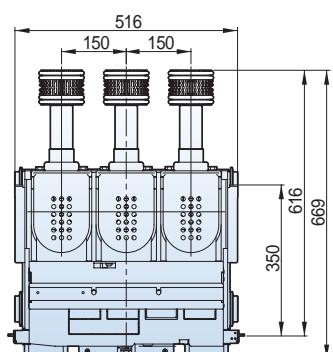

## 7.2kV, 31.5kA, 1250A


**Withdrawable**

■ G type cradle T type, phase distance 150mm

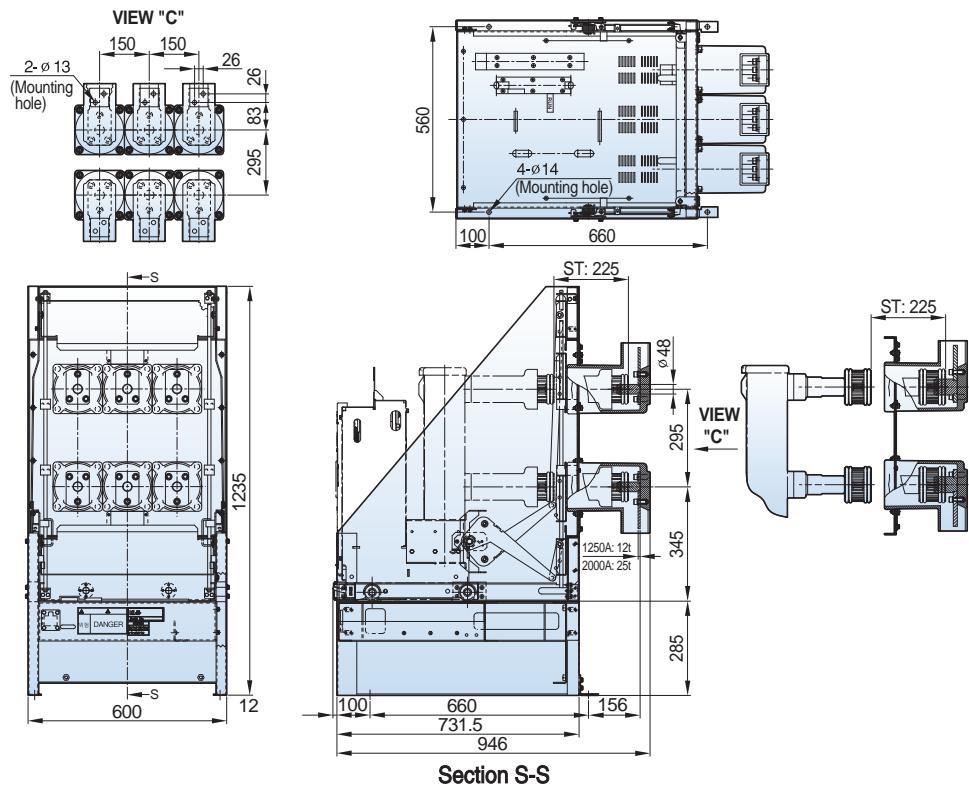

**Withdrawable**

■ MCSG cradle T2 type, phase distance 150mm


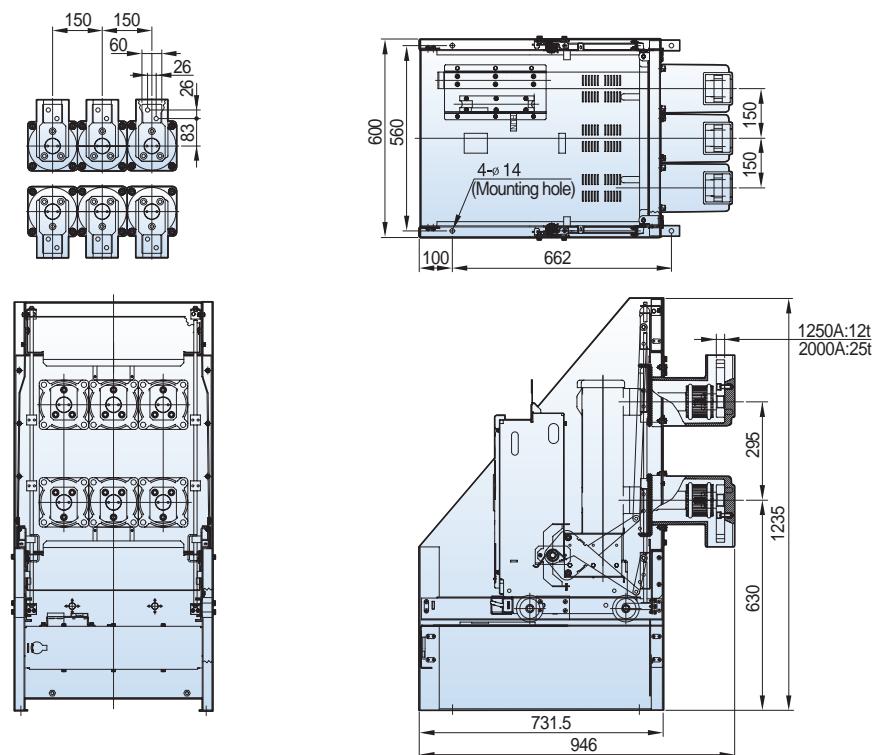


# Dimensions - VL type (VL-06/12/17/20/25/36)



**7.2kV, 31.5kA, 1250A**

**Withdrawable**

■ H type unit, phase distance 150mm

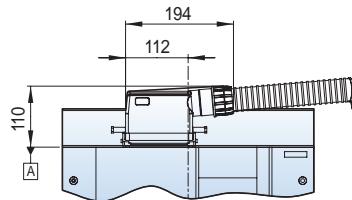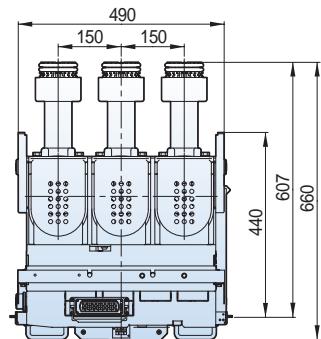

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

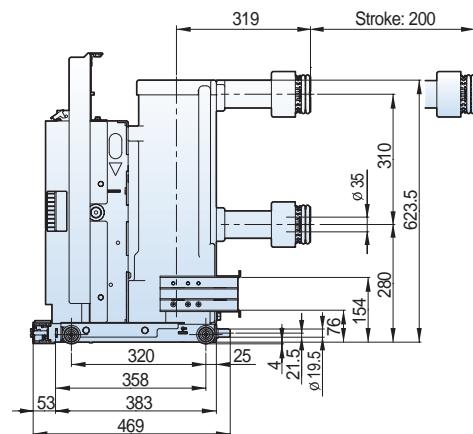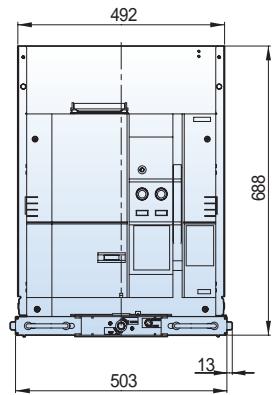


## 7.2kV, 31.5kA, 1250A


### Withdrawable

#### ■ Ha type cradle, phase distance 150mm

Type  
VCL-06Ha32A13

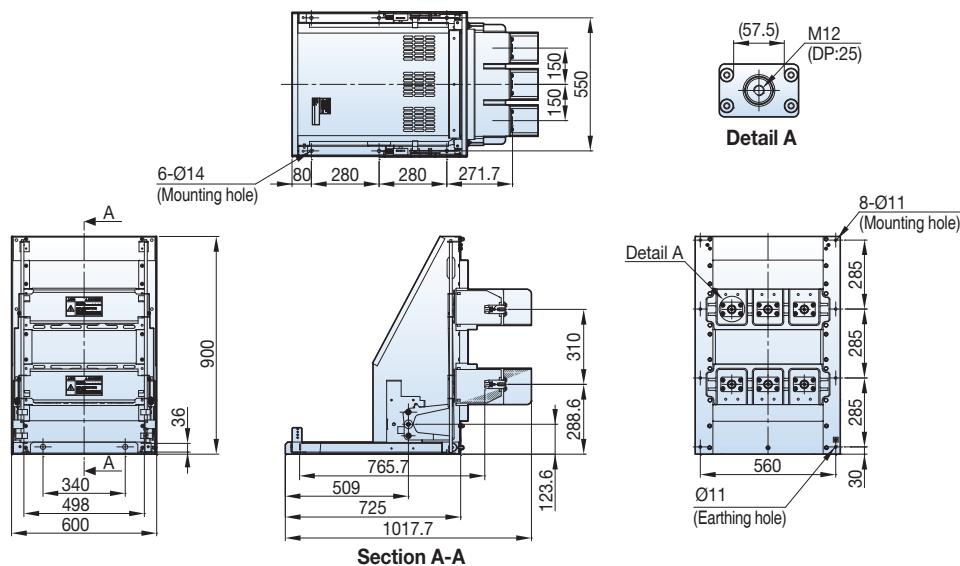

#### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

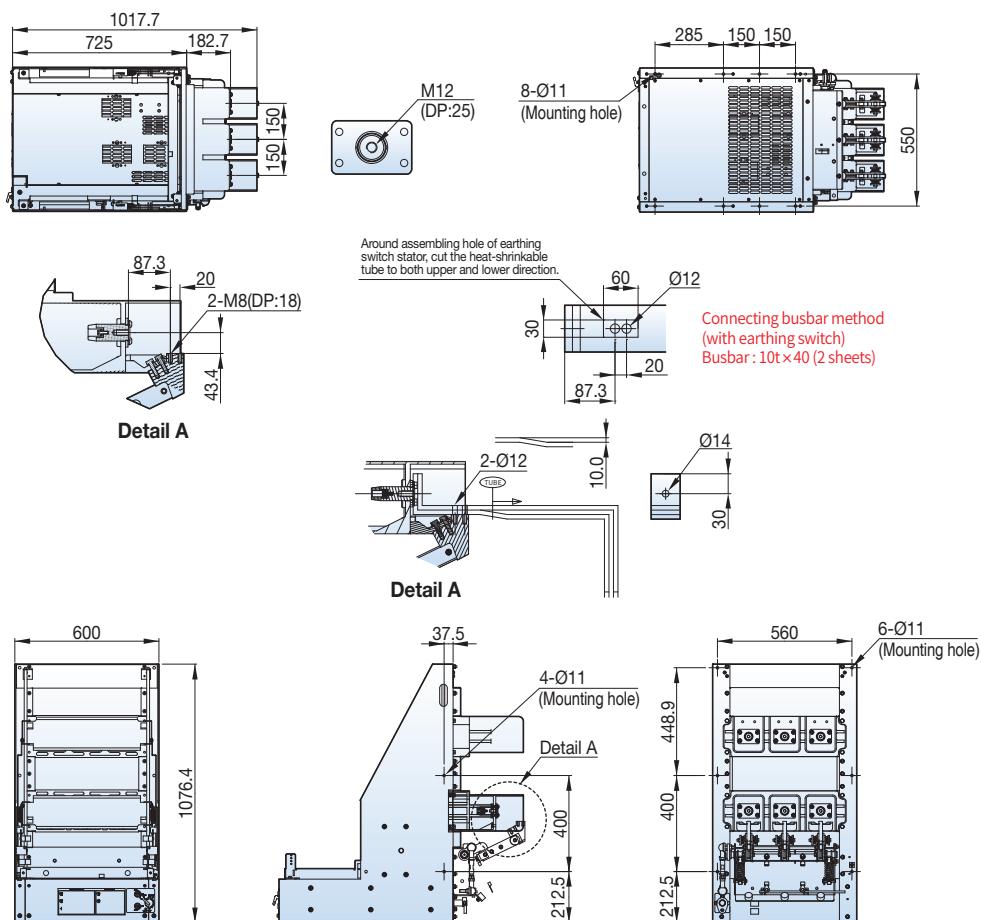


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 1250A**

**Withdrawable**


■ H type cradle, phase distance 150mm

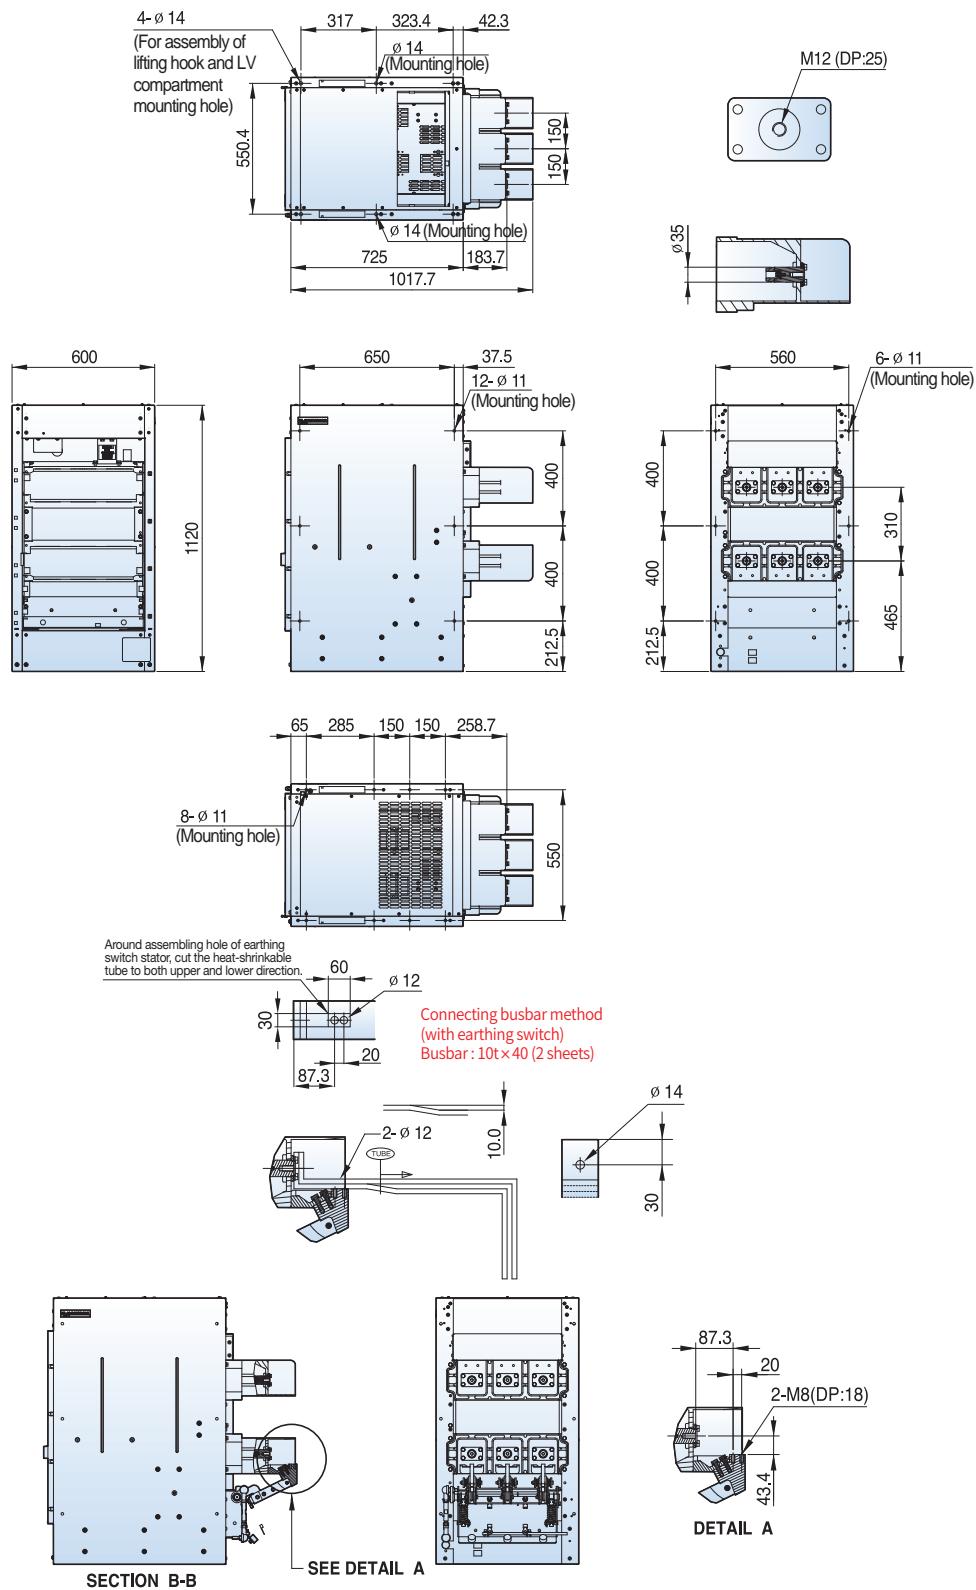

## 7.2kV, 31.5kA, 2000A


**Fixed**

■ P type, phase distance 150mm

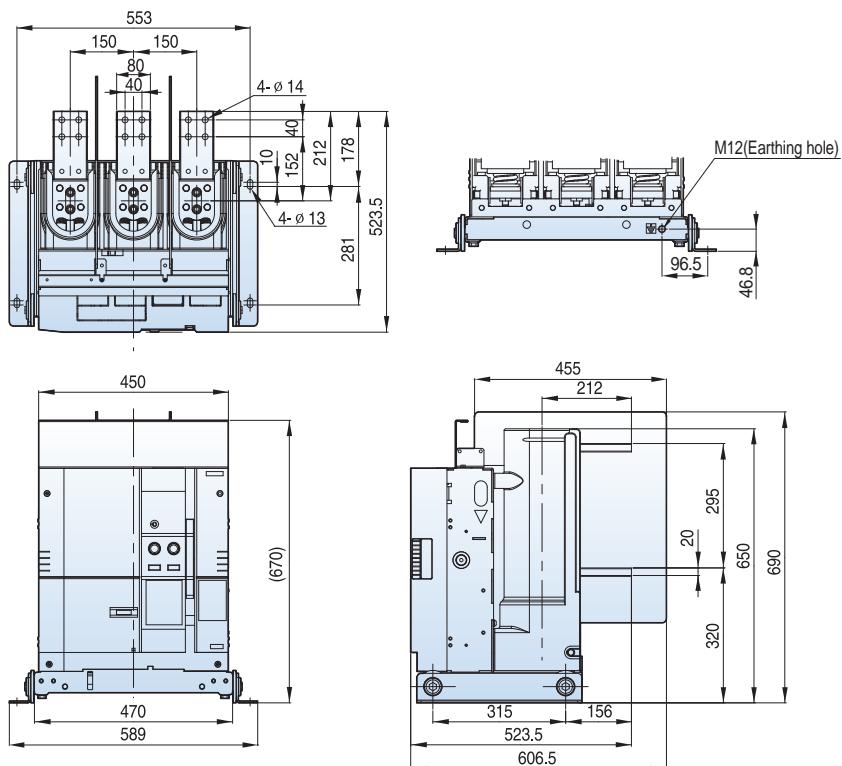

**Withdrawable**

■ E type unit, phase distance 150mm



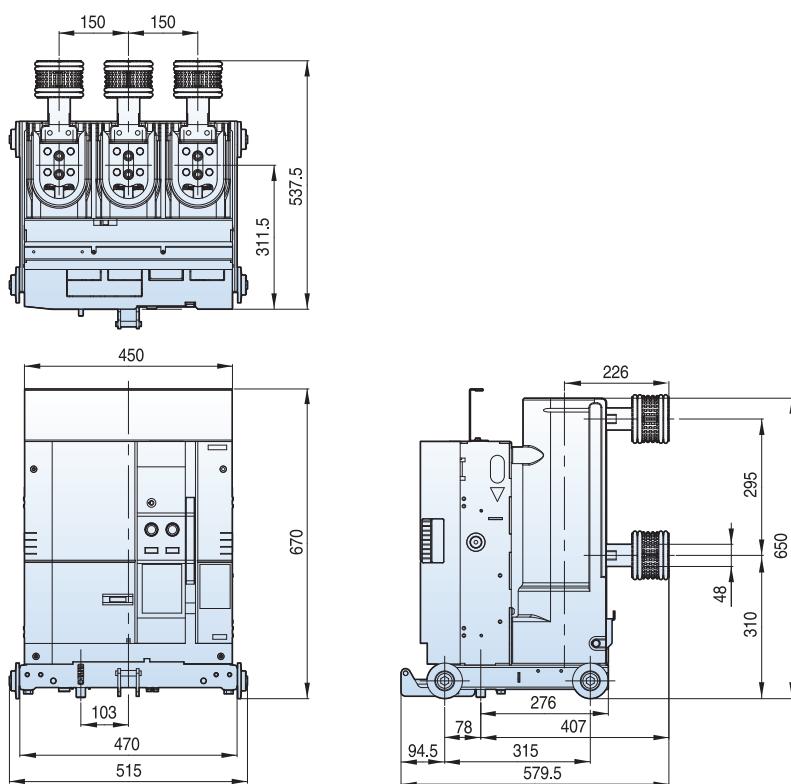


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 2000A**





**Withdrawable**

■ F/G type unit, phase distance 150mm

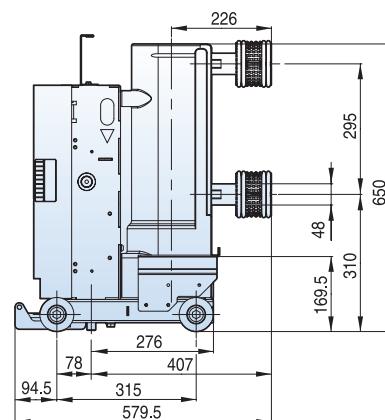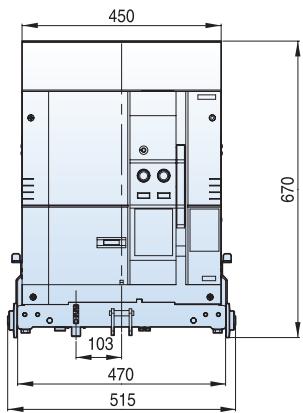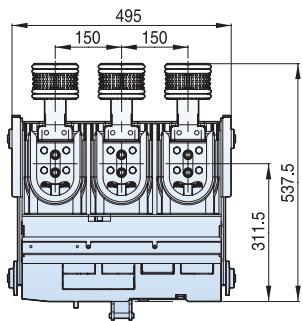

**Withdrawable**





■ E type cradle, phase distance 150mm

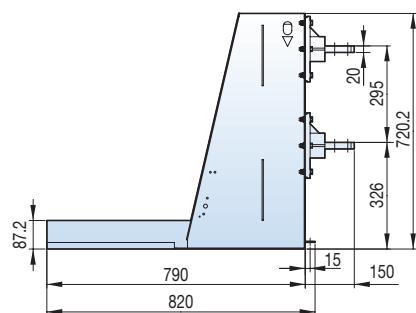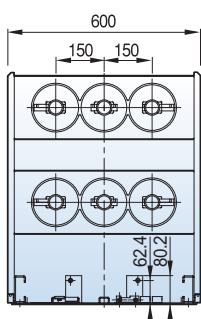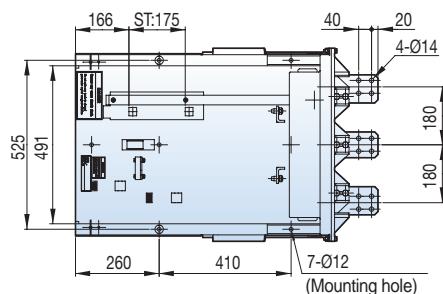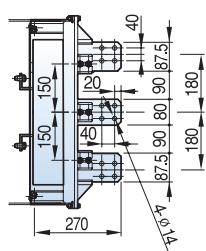

## 7.2kV, 31.5kA, 2000A





**Withdrawable**

■ F type cradle, phase distance 150mm

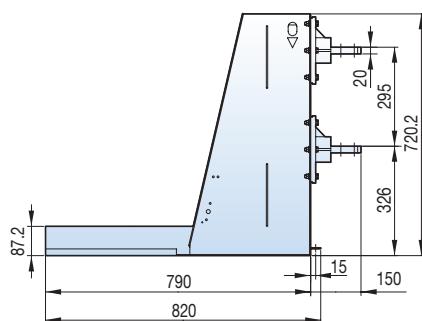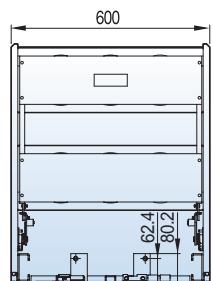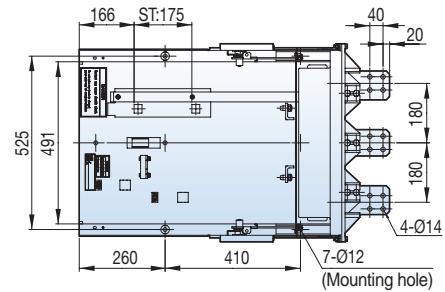

**Withdrawable**

■ G type cradle, phase distance 150mm

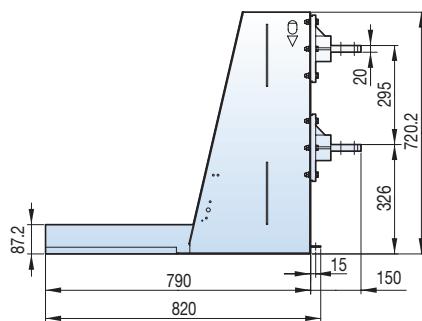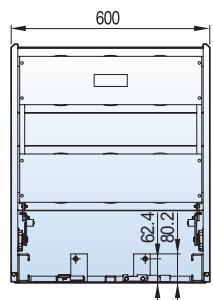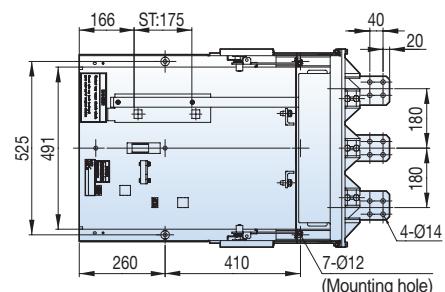


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 1250/2000A**


**Withdrawable**

■ Fs type unit, phase distance 150mm

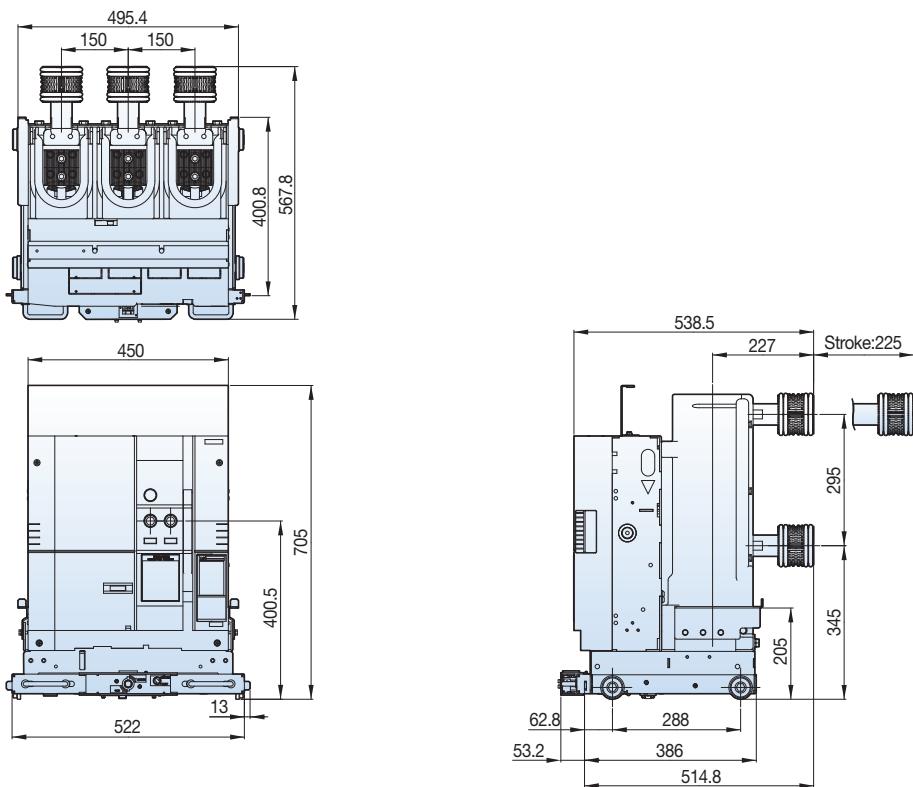

**Withdrawable**




■ Fs type cradle, phase distance 150mm

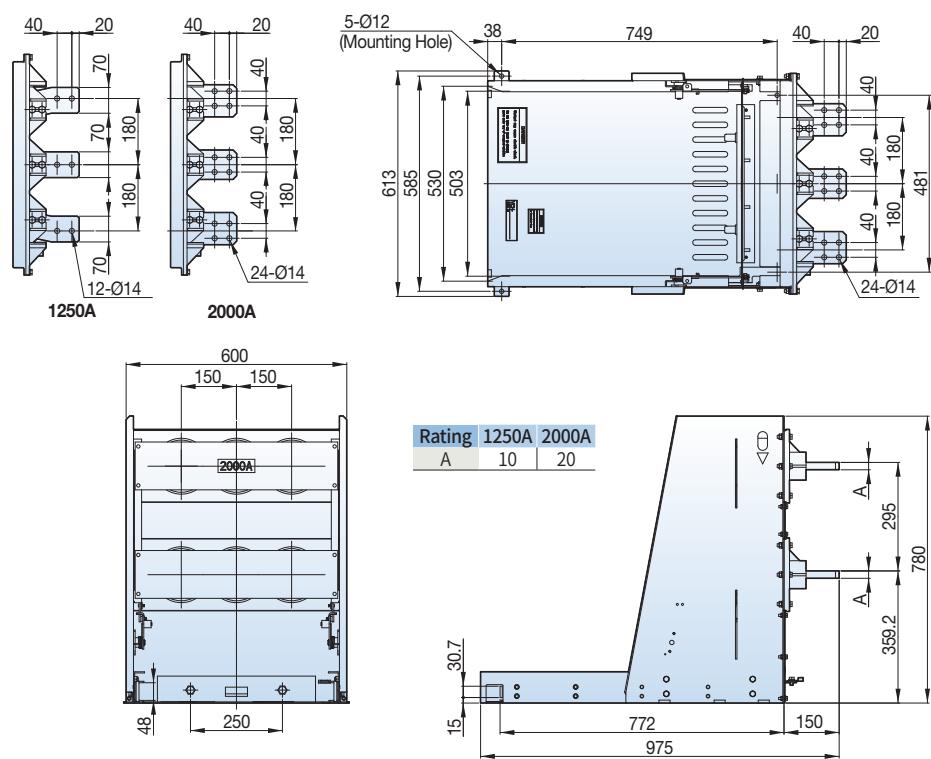

## 7.2kV, 31.5kA, 2000A




**Withdrawable**

■ K type unit T type, phase distance 150mm

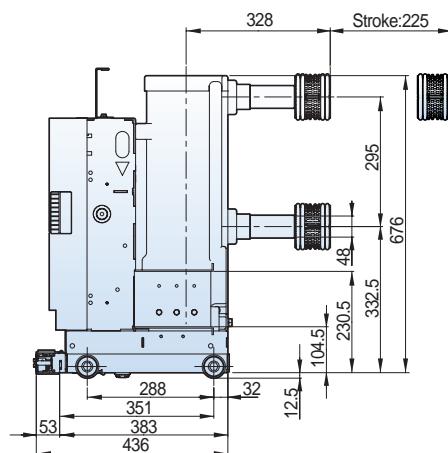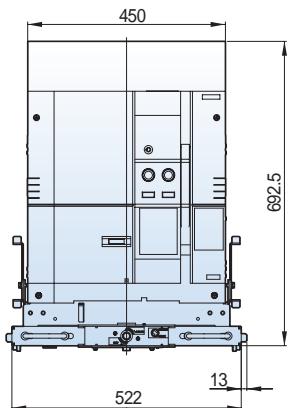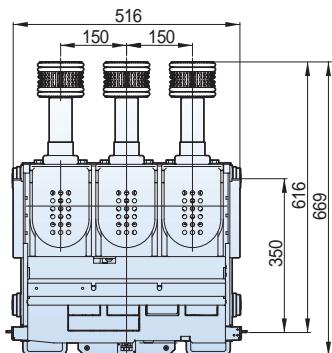

**Withdrawable**

■ K type unit T2 type, phase distance 150mm

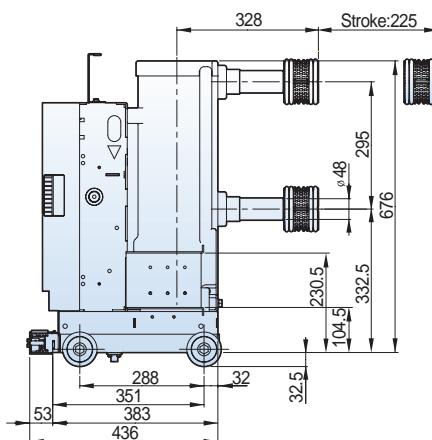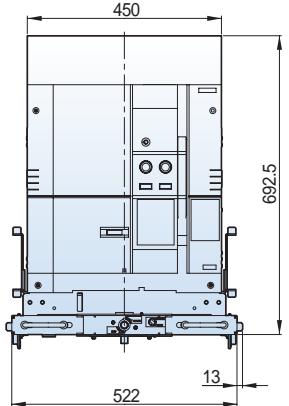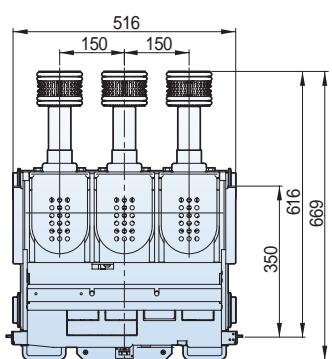


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 2000A**


**Withdrawable**

■ G type cradle T type, phase distance 150mm

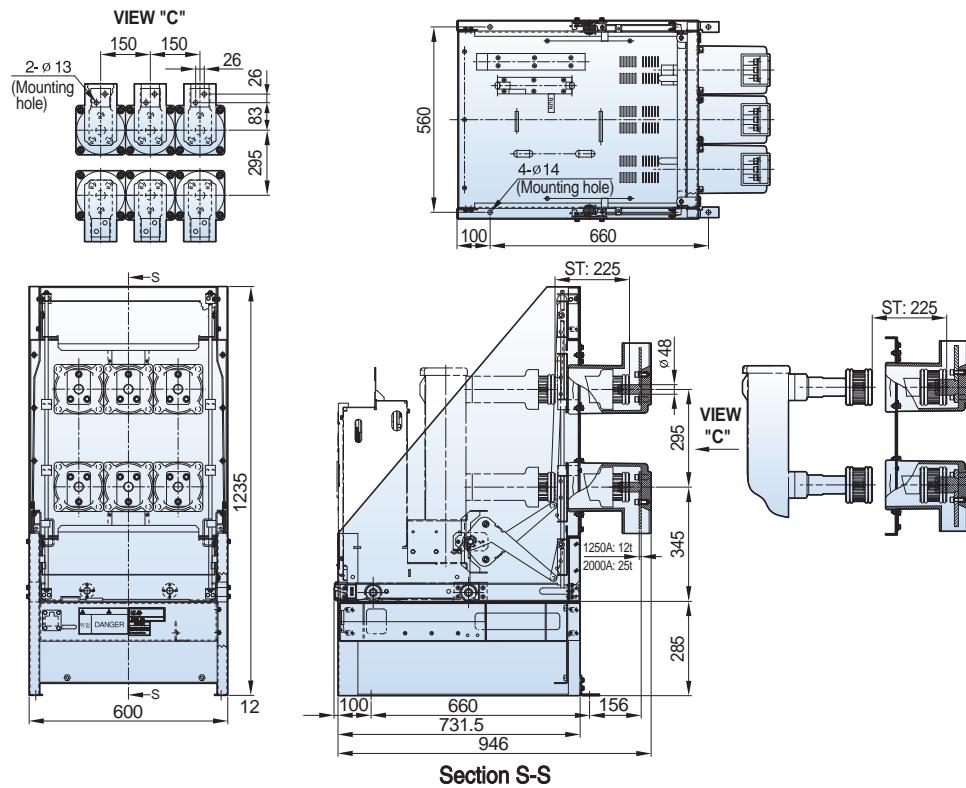

**Withdrawable**



■ MCSG cradle T2 type, phase distance 150mm

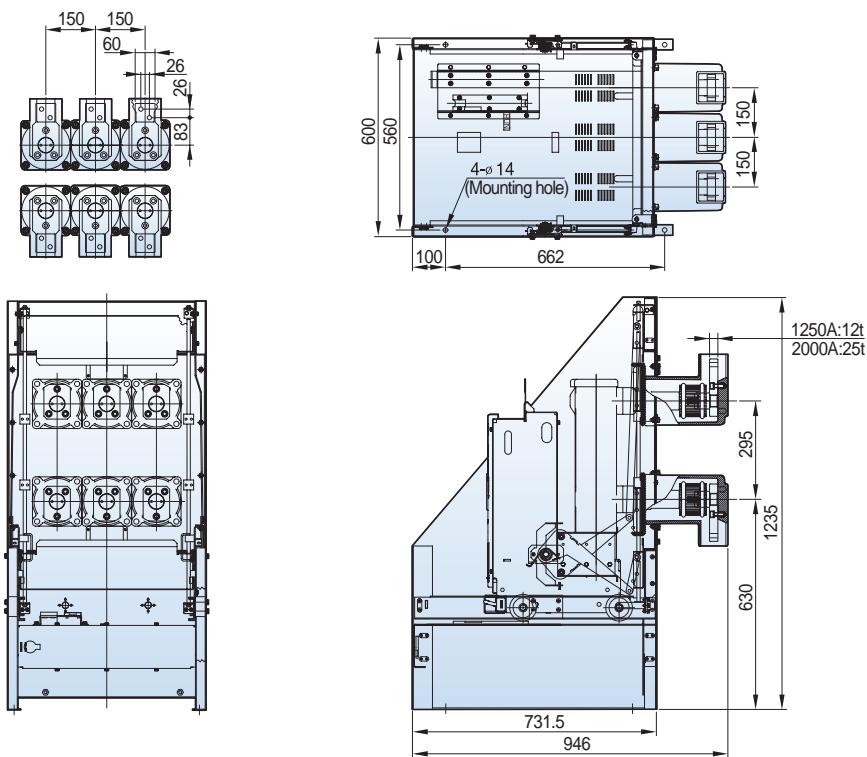



## 7.2kV, 31.5kA, 2000A

**Withdrawable**

■ H type unit, phase distance 150mm

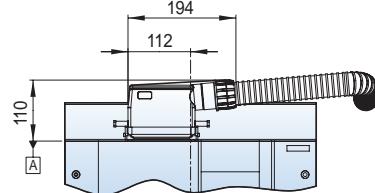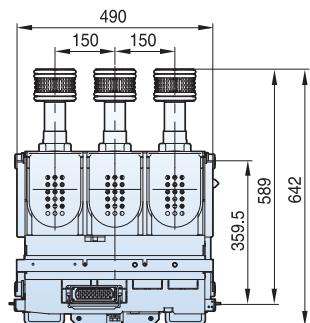

Note) Please be informed that When B-type connector is used to design switchgears, the height can 110mm higher based on "A"

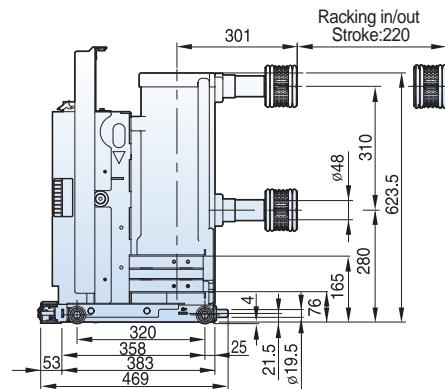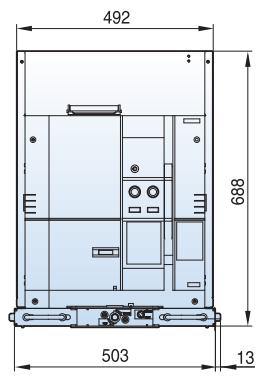


# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2kV, 31.5kA, 2000A**


## Withdrawable

### ■ Ha type cradle, phase distance 150mm

Type
VCL-06Ha32A20

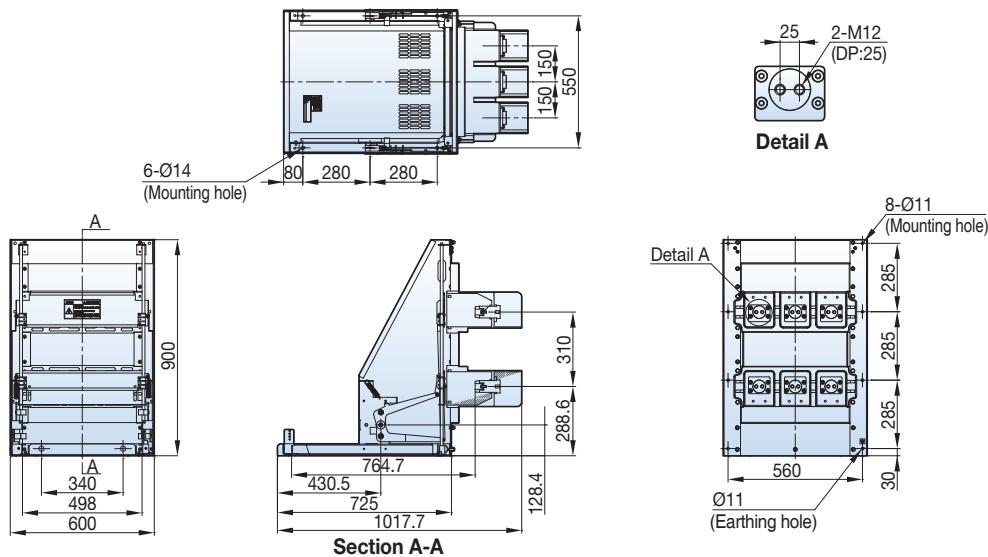


### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

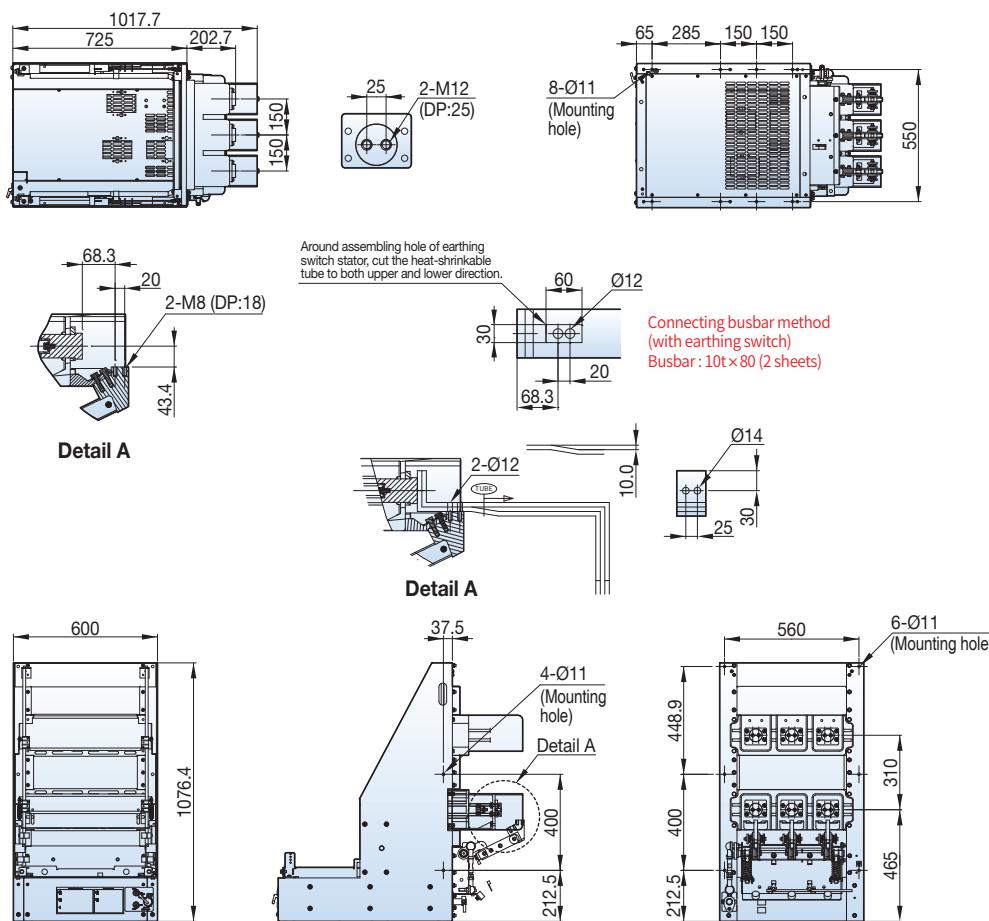

## 7.2kV, 31.5kA, 2000A

### Withdrawable

#### H type cradle, phase distance 150mm

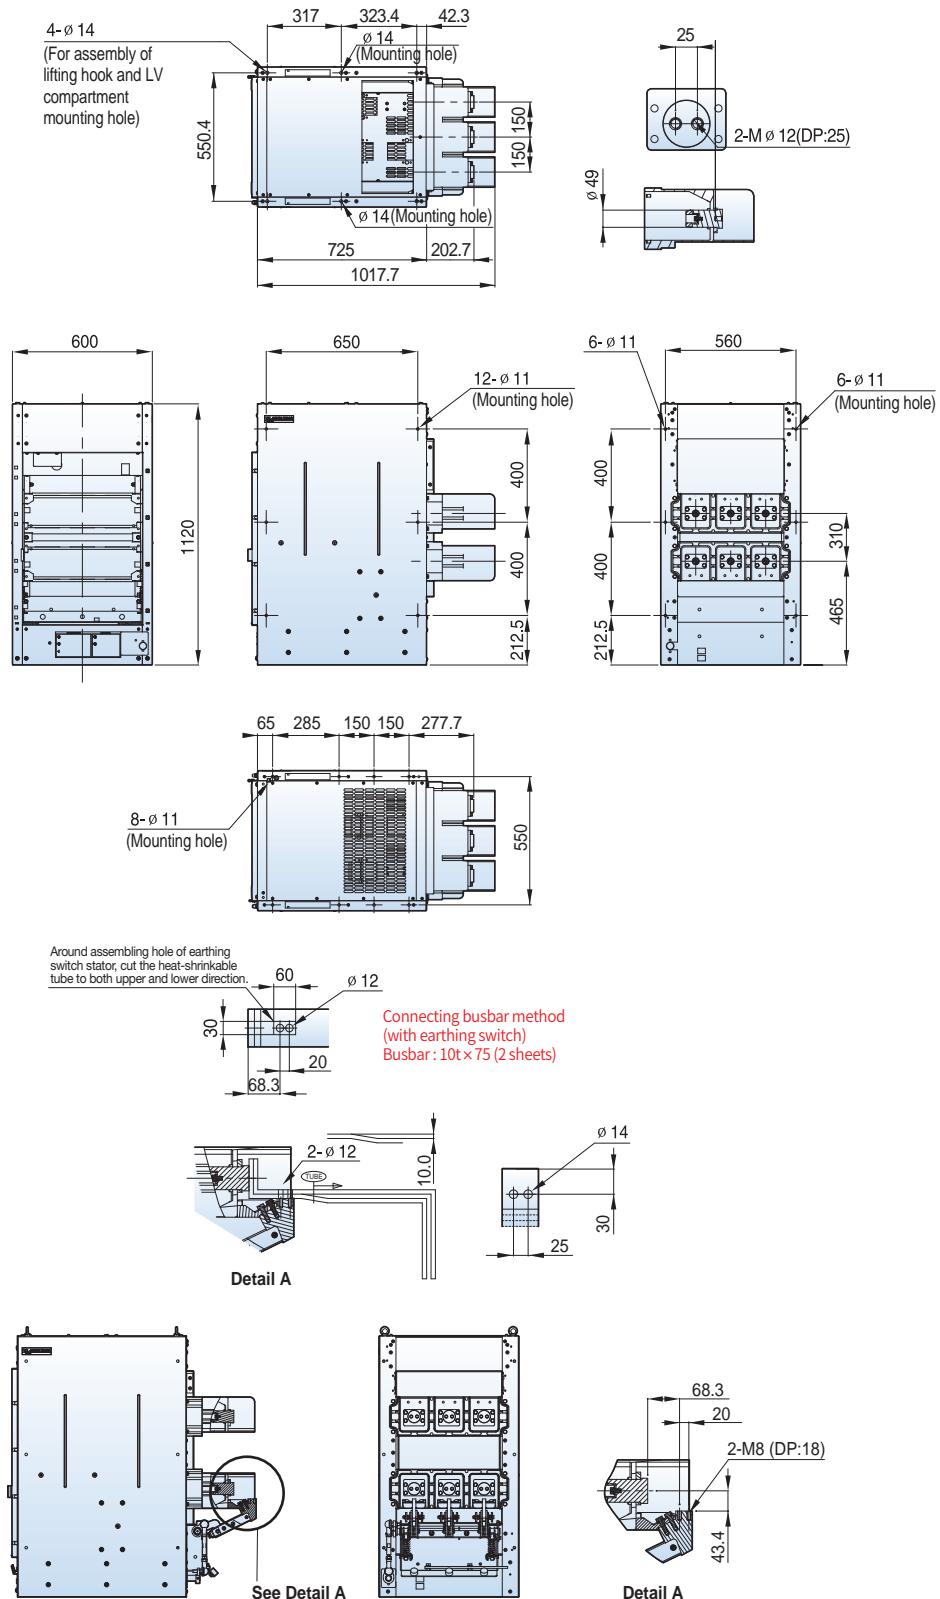


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 630/1250A**


**Fixed**







■ P type, phase distance 150mm

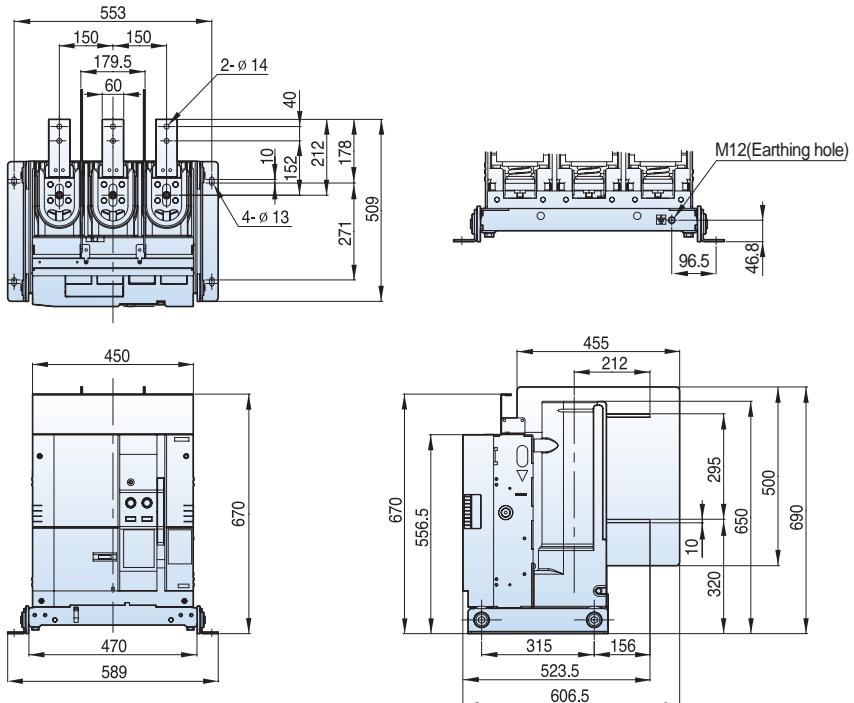

**Fixed**

■ P type, phase distance 210mm

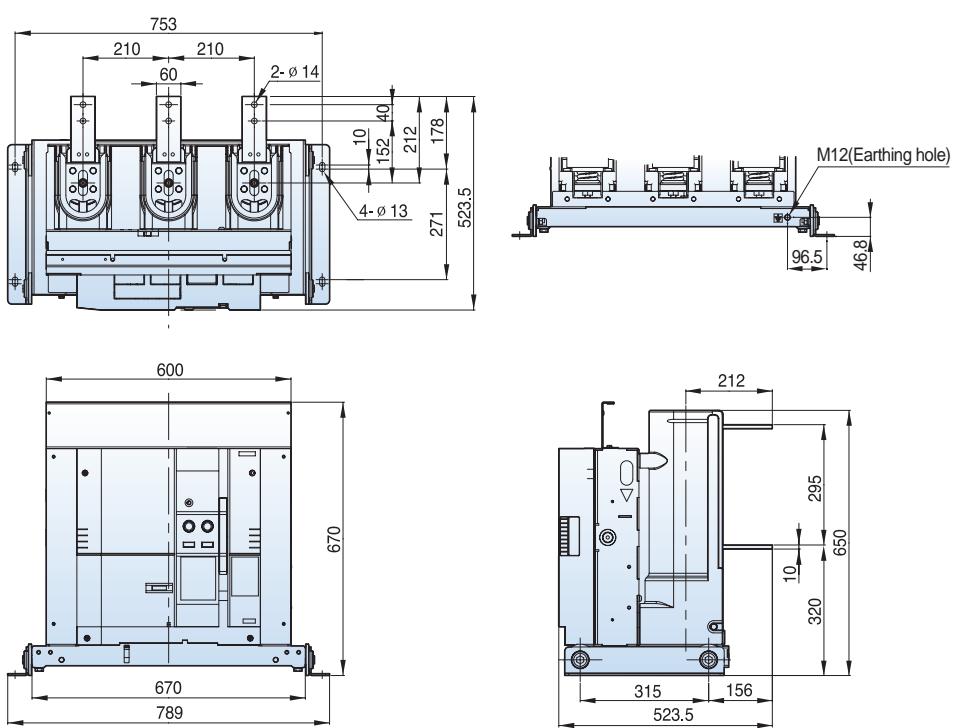

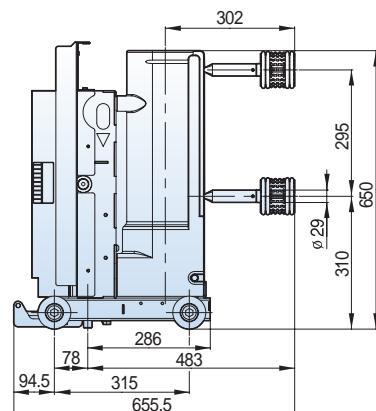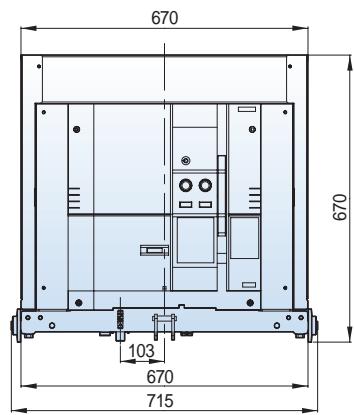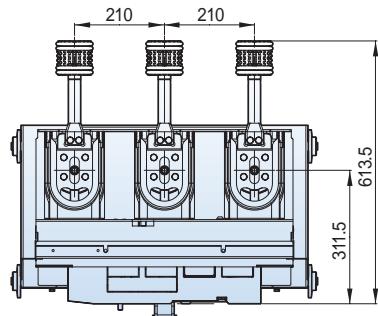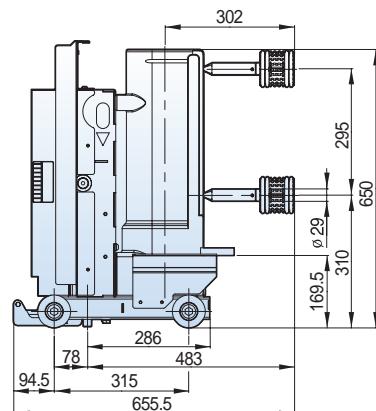
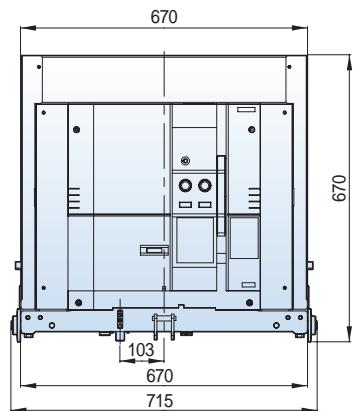
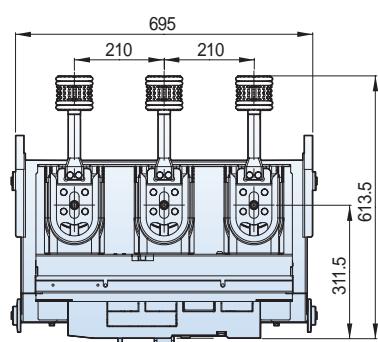
**12/17.5kV, 20/25kA, 630/1250A****Withdrawable****■ Compatible with existing E type unit, phase distance 210mm****Withdrawable****■ Compatible with existing F type unit, phase distance 210mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 630/1250A**




**Withdrawable**







■ E type unit, phase distance 210mm

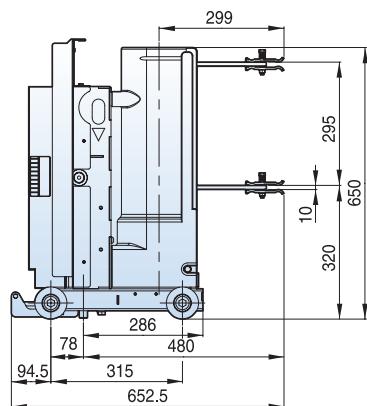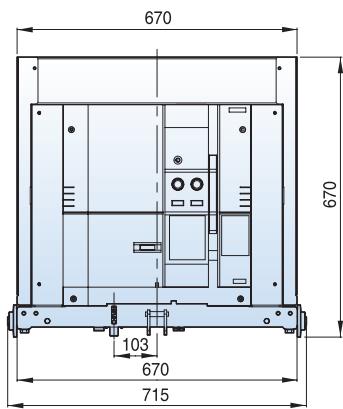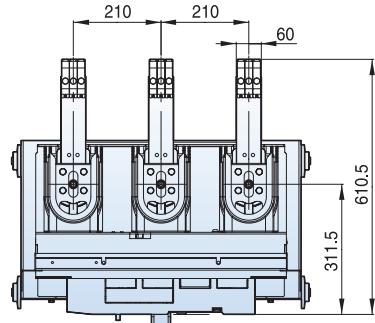

**Withdrawable**

■ F type unit, phase distance 210mm

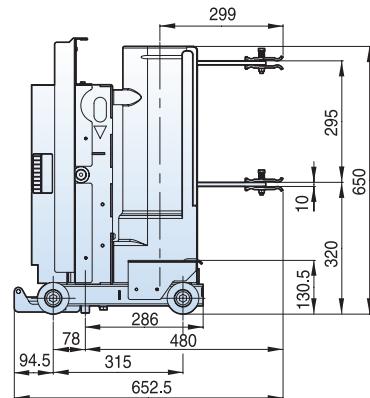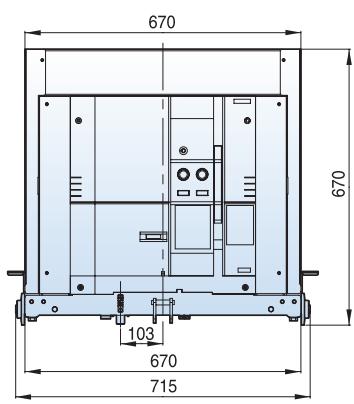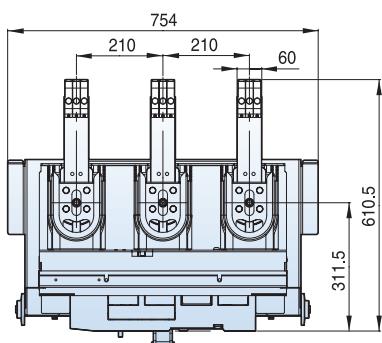

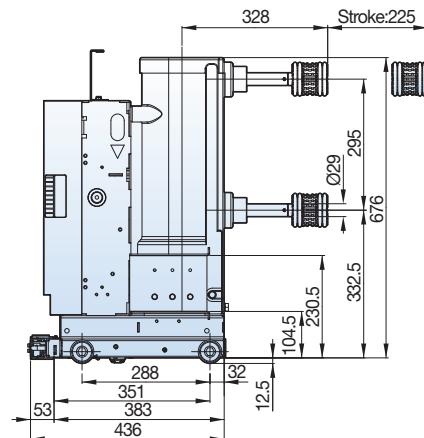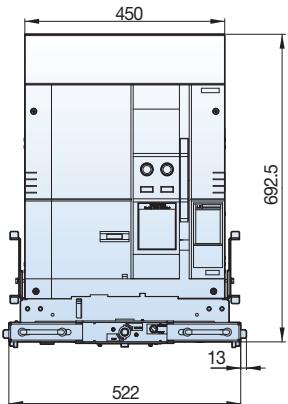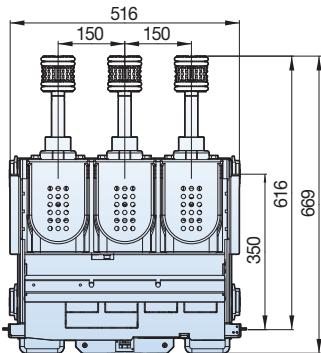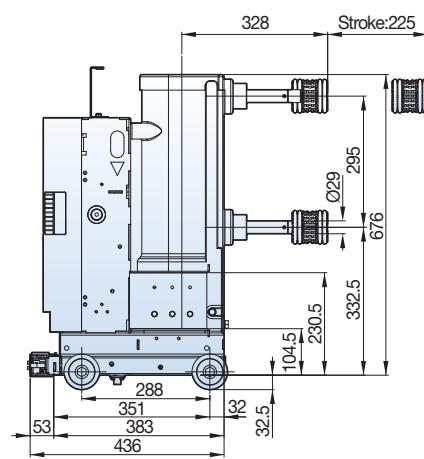
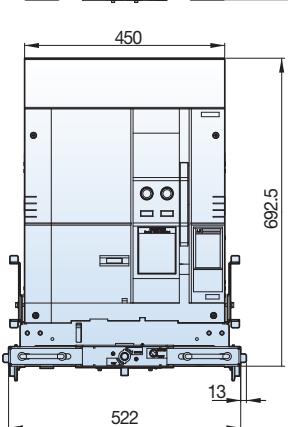
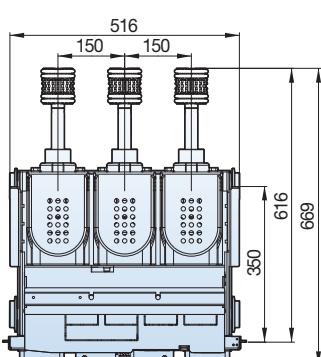
**12kV, 20/25kA, 630/1250A****Withdrawable****■ K type unit T type, phase distance 150mm****Withdrawable****■ K type unit T2 type, phase distance 150mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 630A**

**Withdrawable**

■ Compatible with existing E cradle, phase distance 210mm

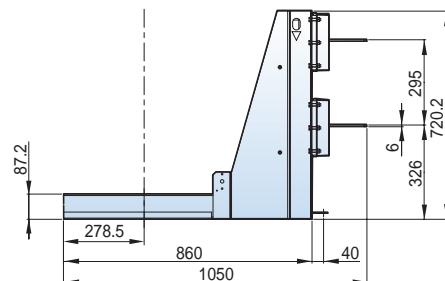
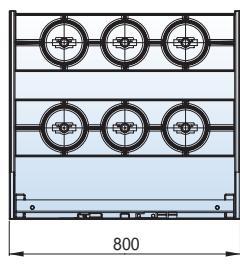
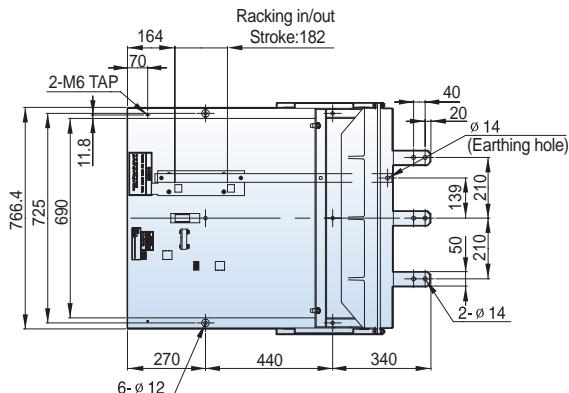


\* Please be informed that the switchgear IP cover has to be back of —— mark.

**12/17.5kV, 20/25kA, 630A**

**Withdrawable**

■ Compatible with existing E cradle, phase distance 210mm

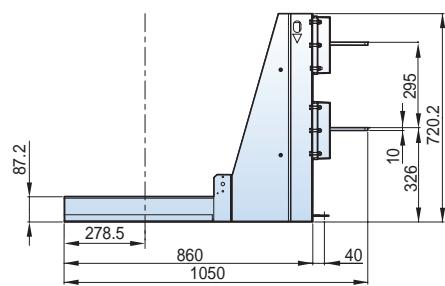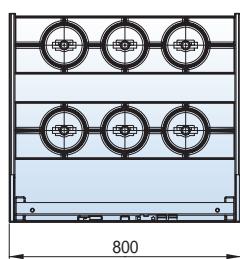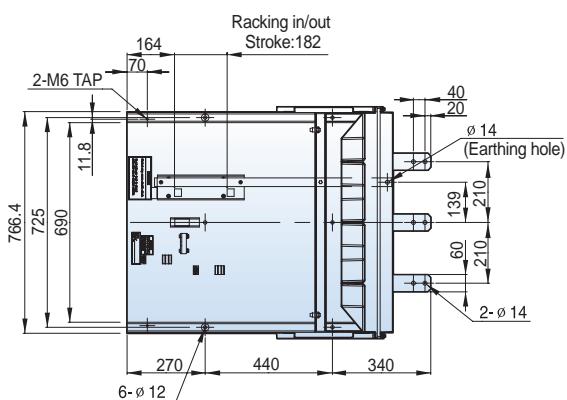


\* Please be informed that the switchgear IP cover has to be back of —— mark.

## 12/17.5kV, 20/25kA, 630A

**Withdrawable**

■ Compatible with existing F cradle, phase distance 210mm

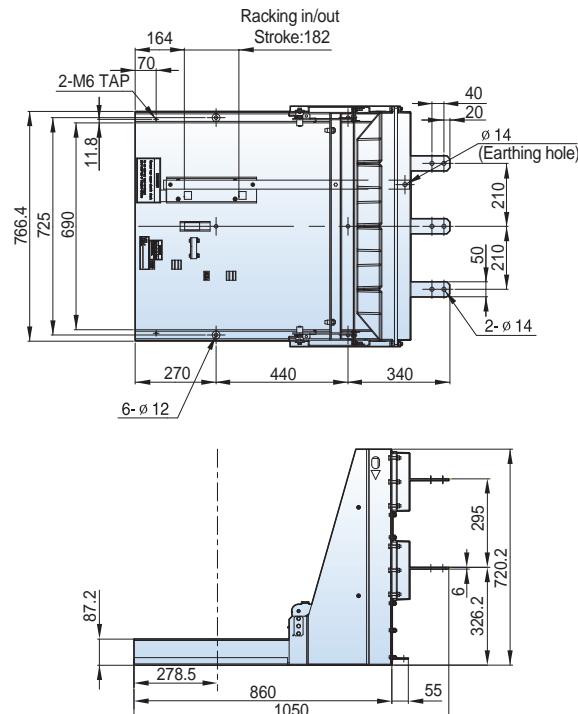


\* Please be informed that the switchgear IP cover has to be back of — — mark.

## 12/17.5kV, 20/25kA, 1250A

**Withdrawable**

■ Compatible with existing F cradle, phase distance 210mm

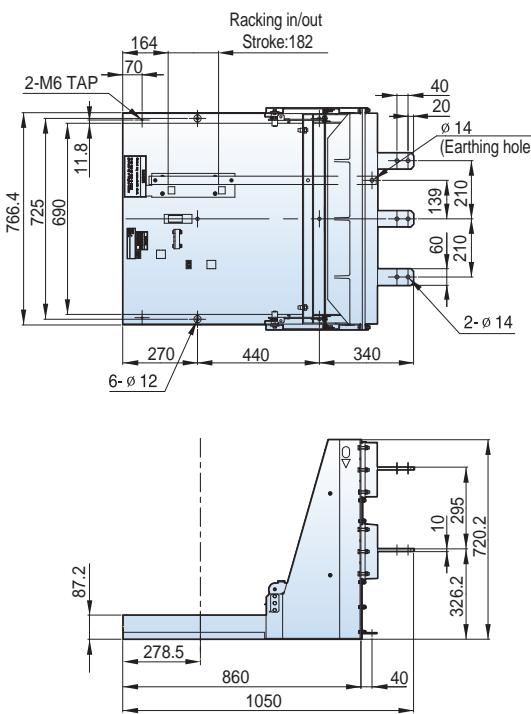


\* Please be informed that the switchgear IP cover has to be back of — — mark.

# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 630/1250A**

**Withdrawable**


■ E type cradle, phase distance 210mm

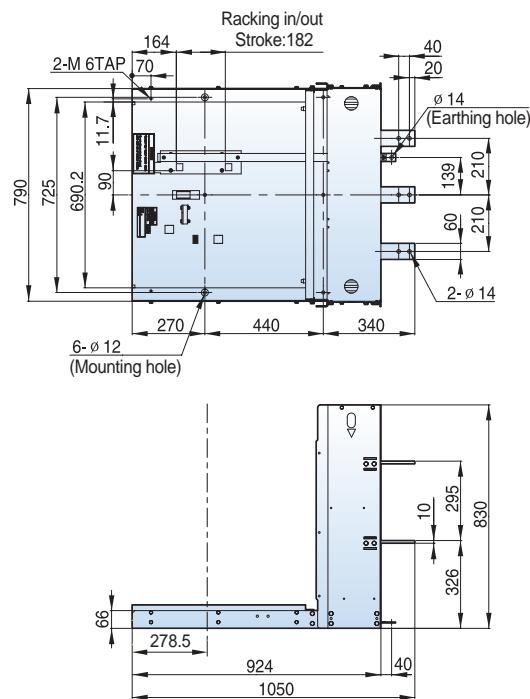



\* Please be informed that the switchgear IP cover has to be back of —— mark.

**Withdrawable**





■ F type cradle, phase distance 210mm

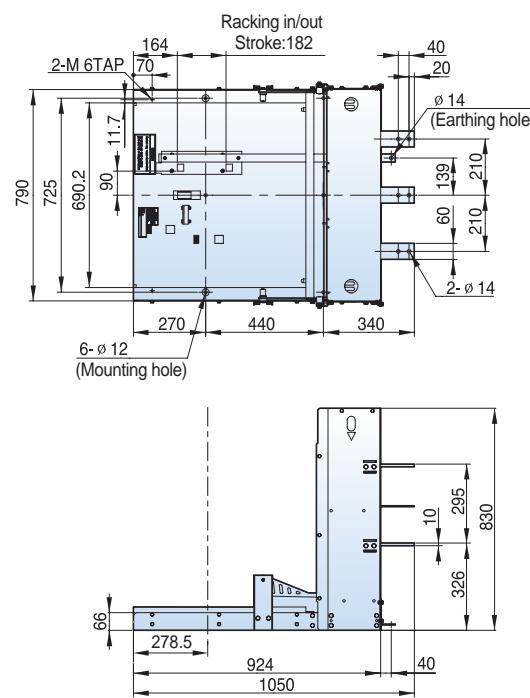



\* Please be informed that the switchgear IP cover has to be back of —— mark.

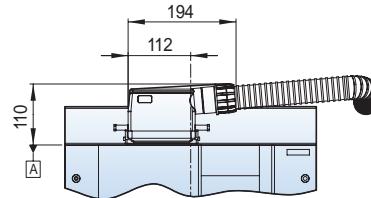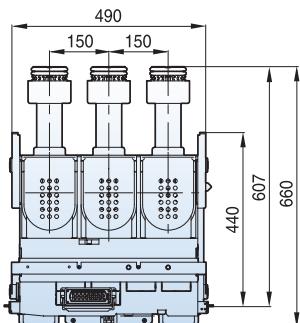**12/17.5kV, 20/25kA, 630/1250A****Withdrawable****■ H type unit, phase distance 150mm**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

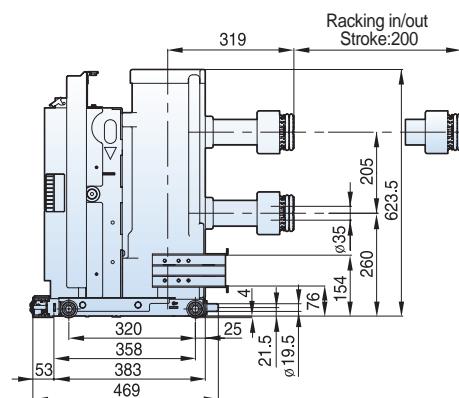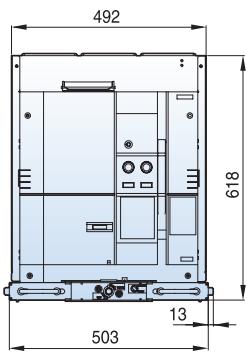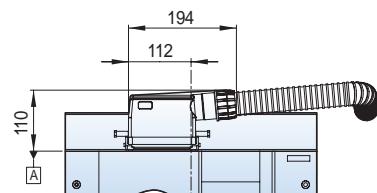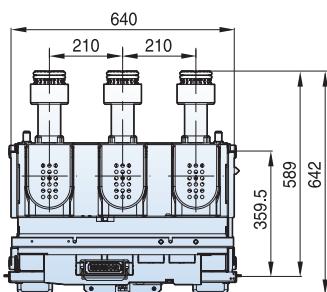**Withdrawable****■ H type unit, phase distance 210mm**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

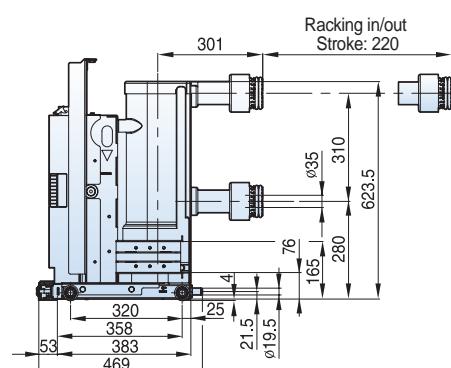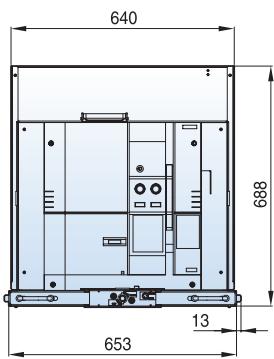


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 630/1250A**

**Withdrawable**


■ H type cradle, phase distance 150mm

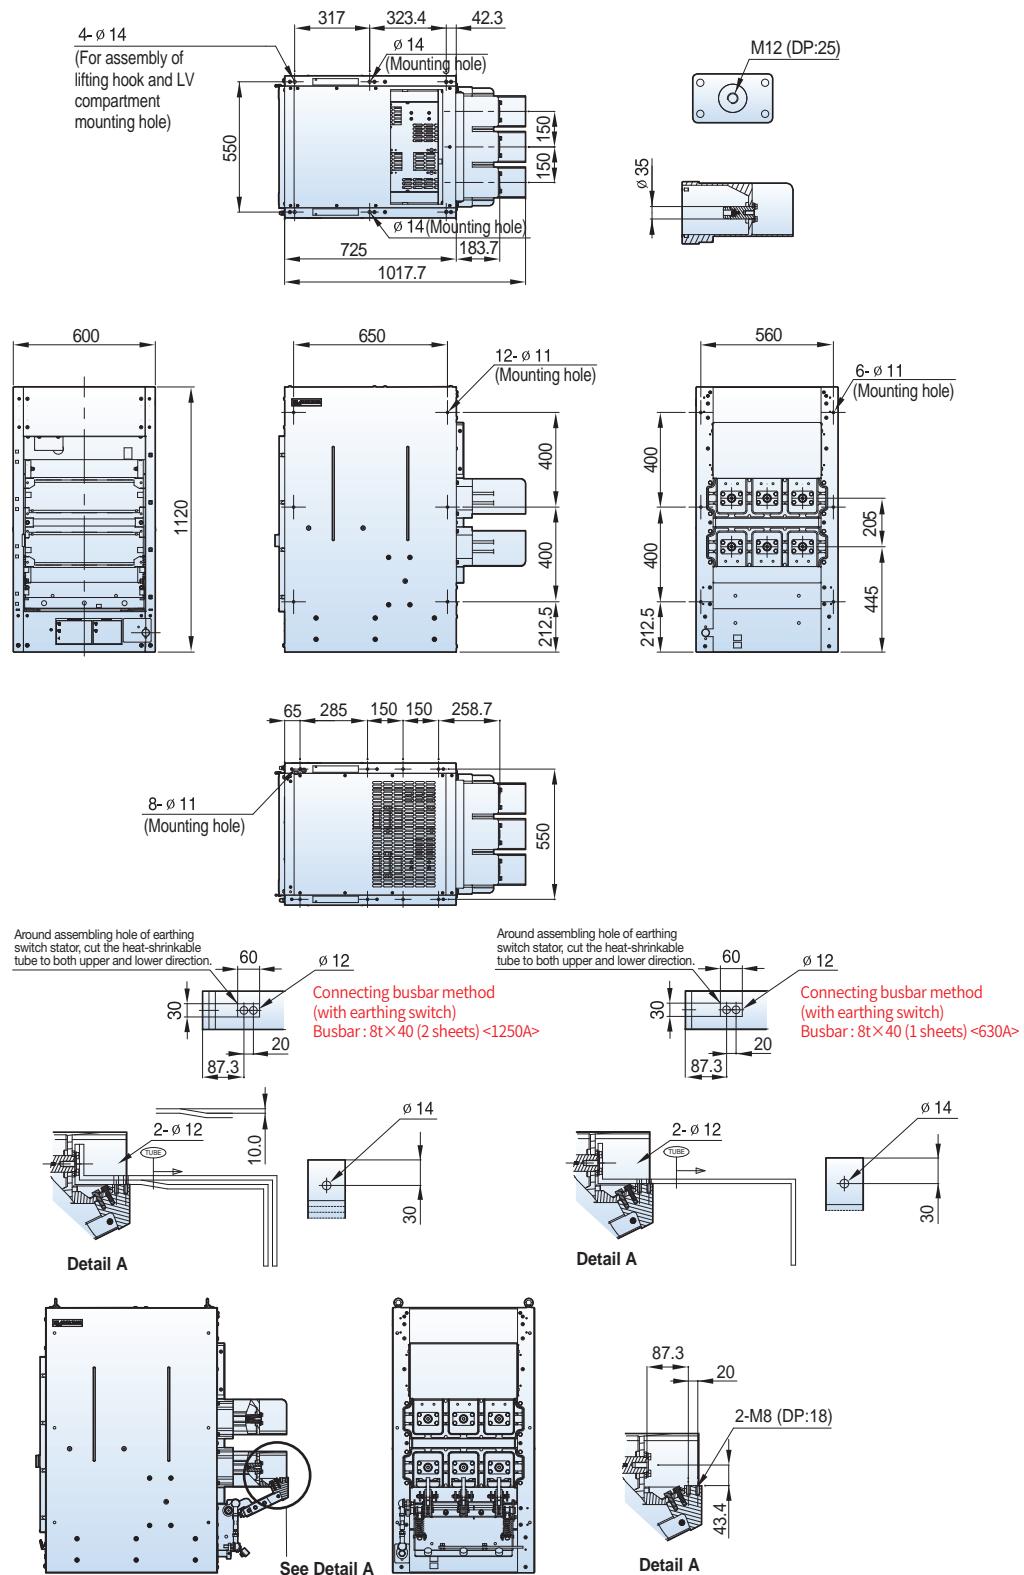

## 12/17.5kV, 20/25kA, 630/1250A

### Withdrawable

#### H type cradle, phase distance 210mm

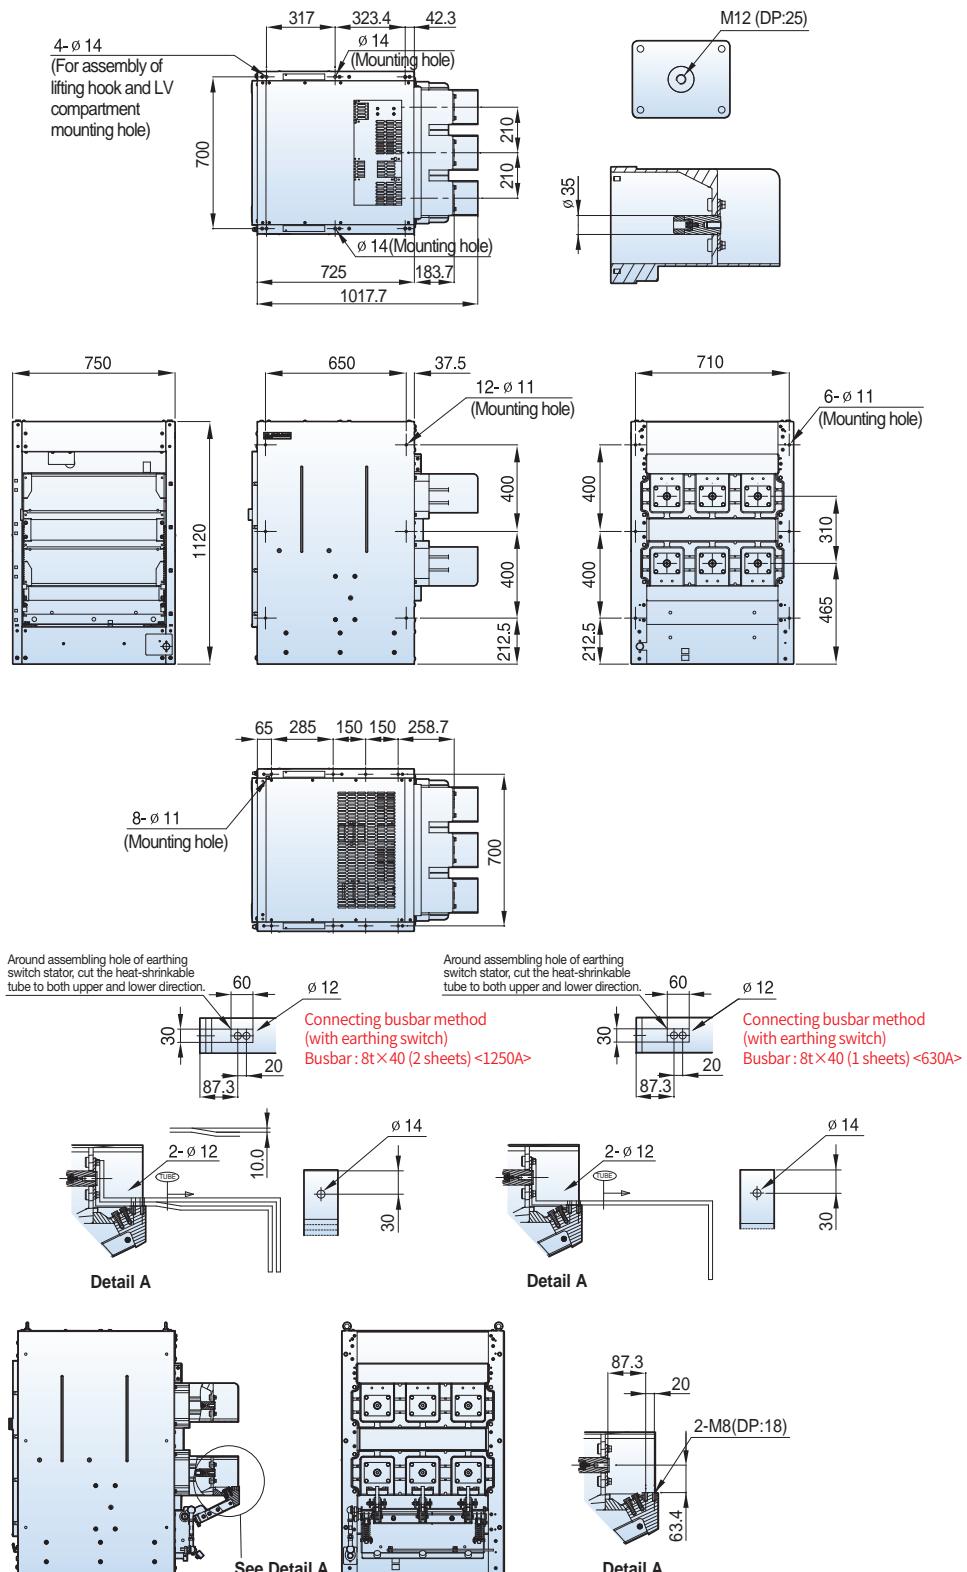


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 2000A**


## Fixed

■ P type, phase distance 210mm

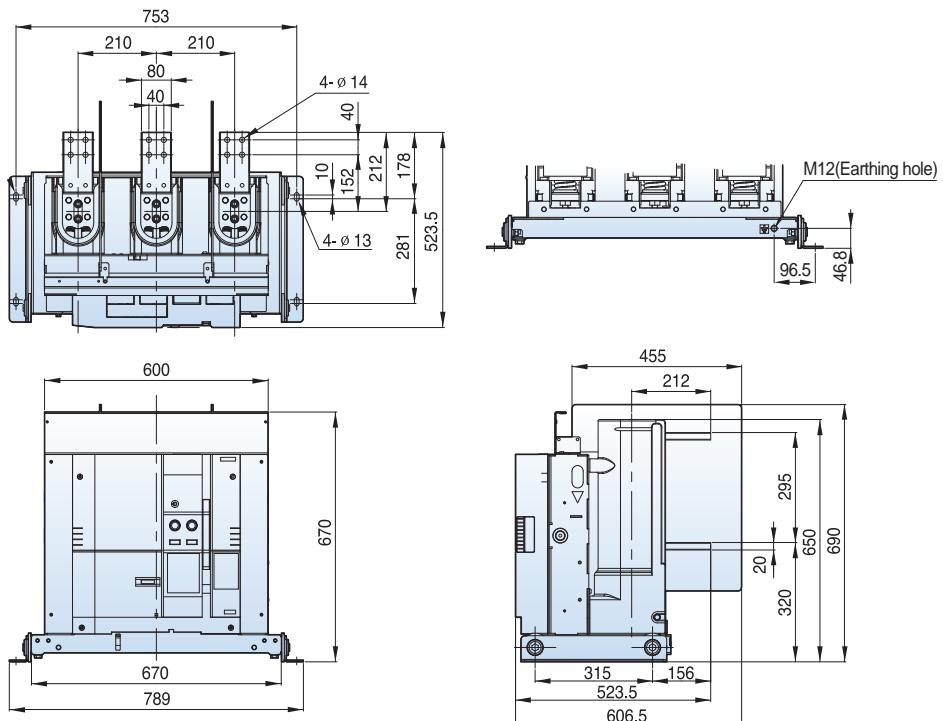

## Withdrawable




■ E type unit, phase distance 210mm

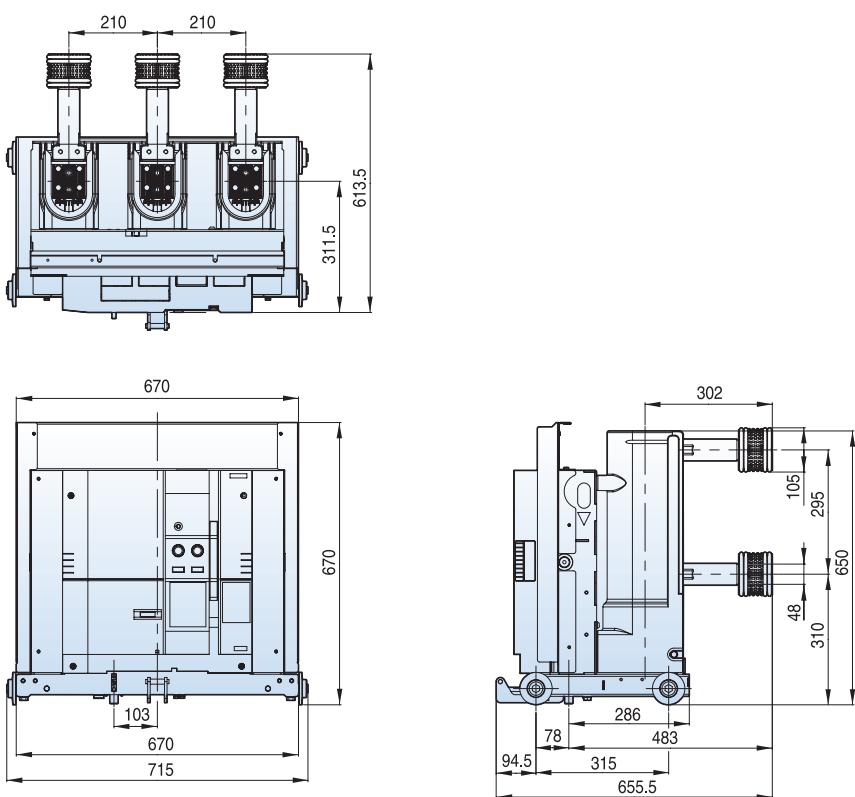

## 12/17.5kV, 20/25kA, 2000A





**Withdrawable**

■ F type unit, phase distance 210mm

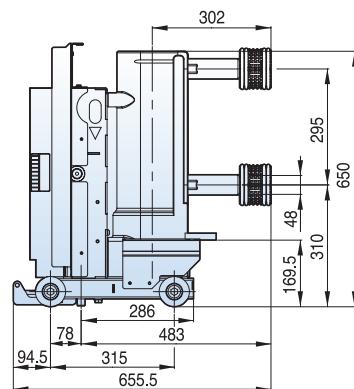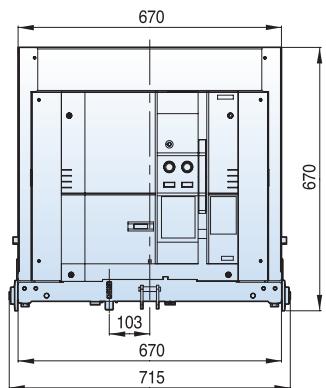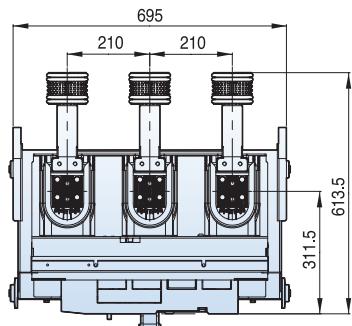

**Withdrawable**

■ E type cradle, phase distance 210mm

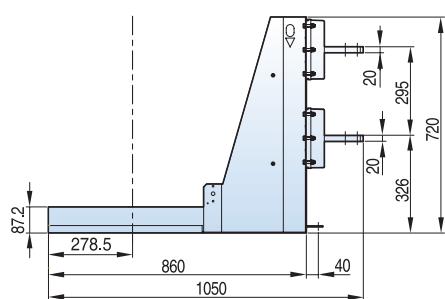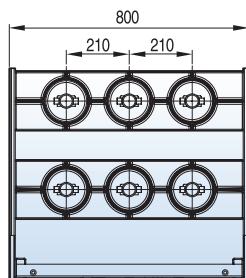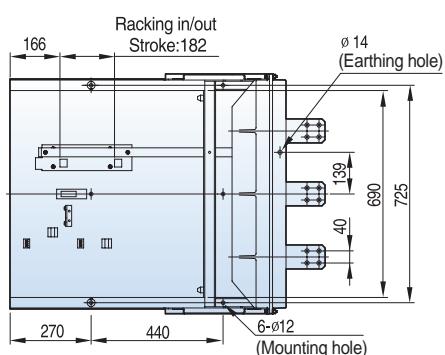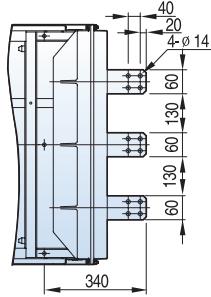


\* Please be informed that the switchgear IP cover has to be back of —— mark.

# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 2000A**

**Withdrawable**

**■ F type cradle, phase distance 210mm**


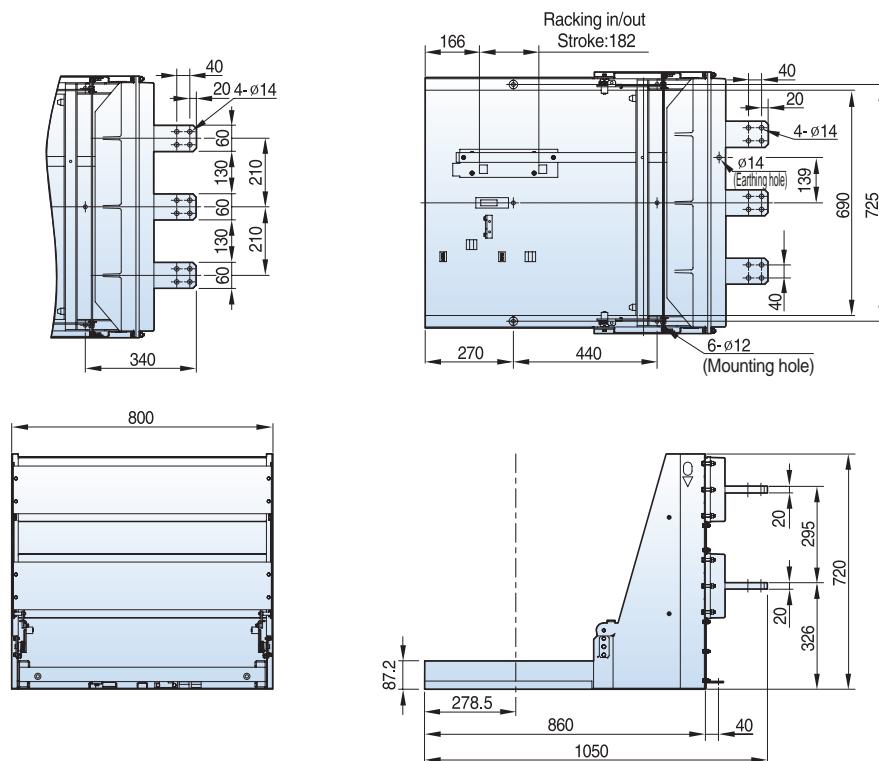


\* Please be informed that the switchgear IP cover has to be back of — - — mark.



## 12/17.5kV, 20/25kA, 2000A

### Withdrawable

#### ■ H type unit, phase distance 150mm

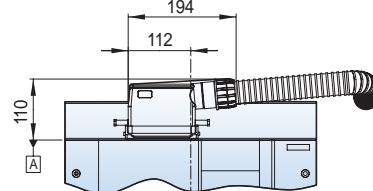
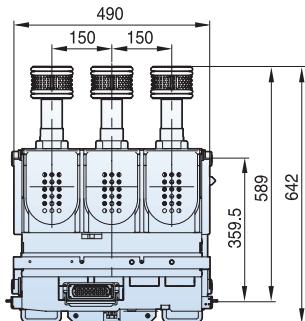


Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

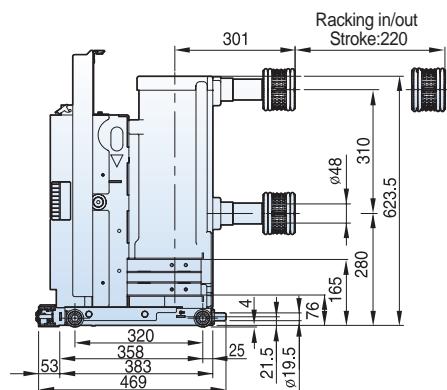
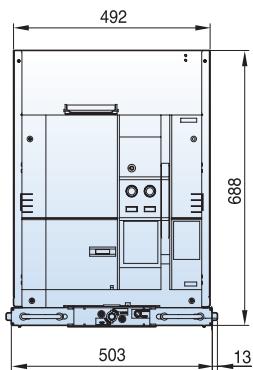


### Withdrawable

#### ■ H type unit, phase distance 210mm

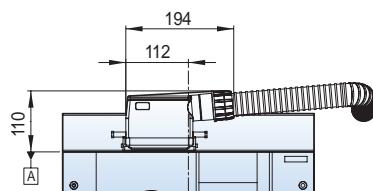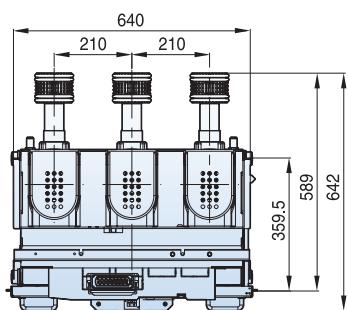

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

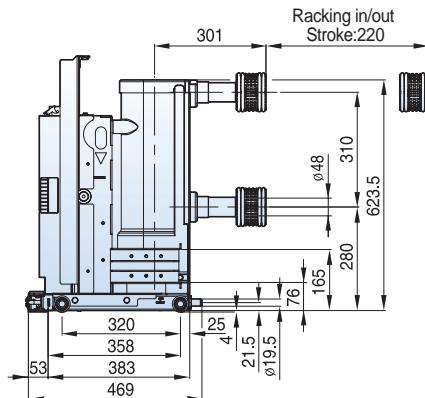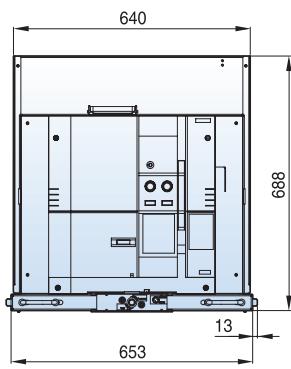


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12kV, 20/25kA, 2000A**


## Withdrawable

### ■ Ha type cradle, phase distance 150mm

Type
VCL-12Ha20A20
VCL-12Ha25A20

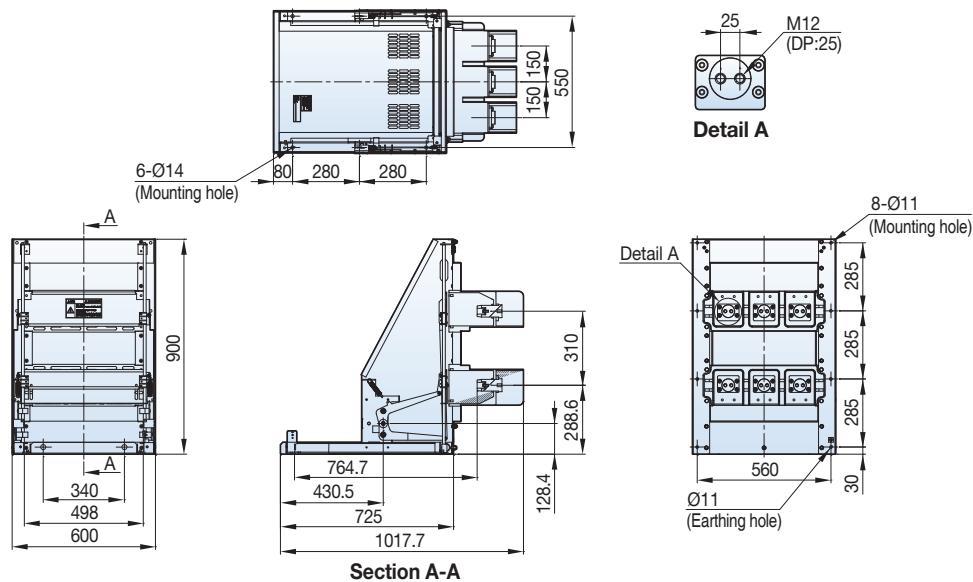


### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

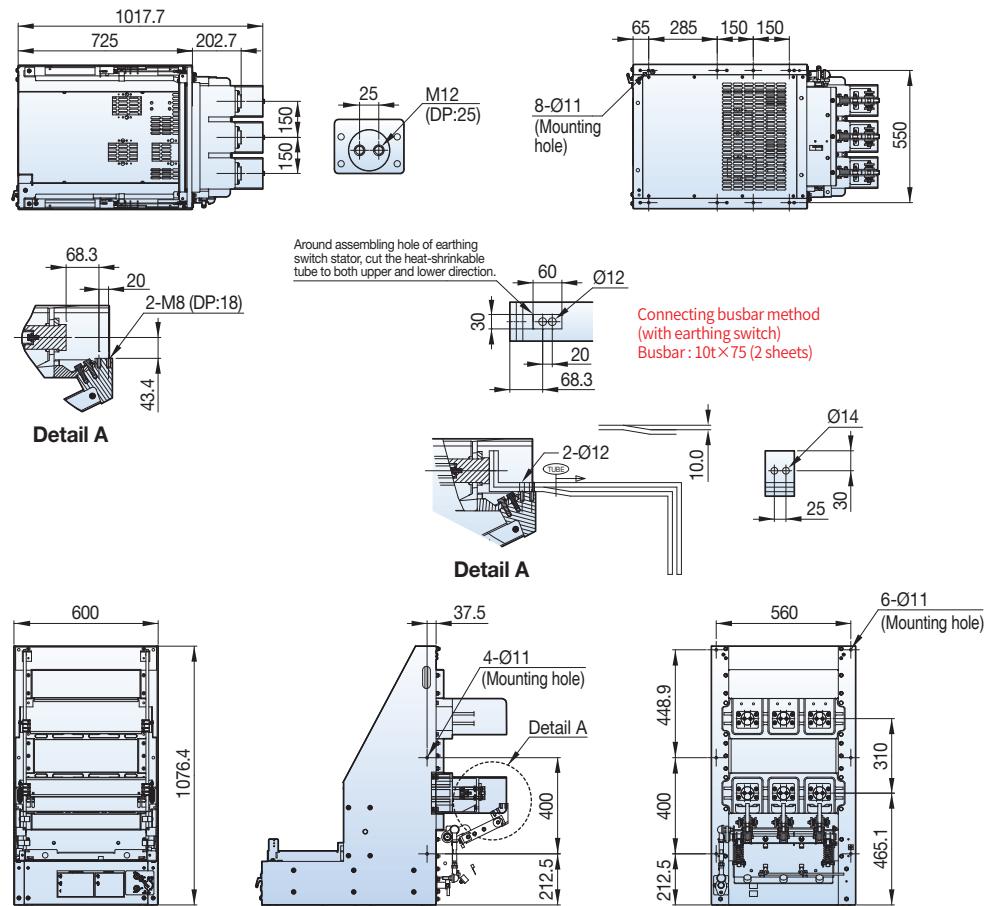

## 12/17.5kV, 20/25kA, 2000A

### Withdrawable

#### H type cradle, phase distance 150mm

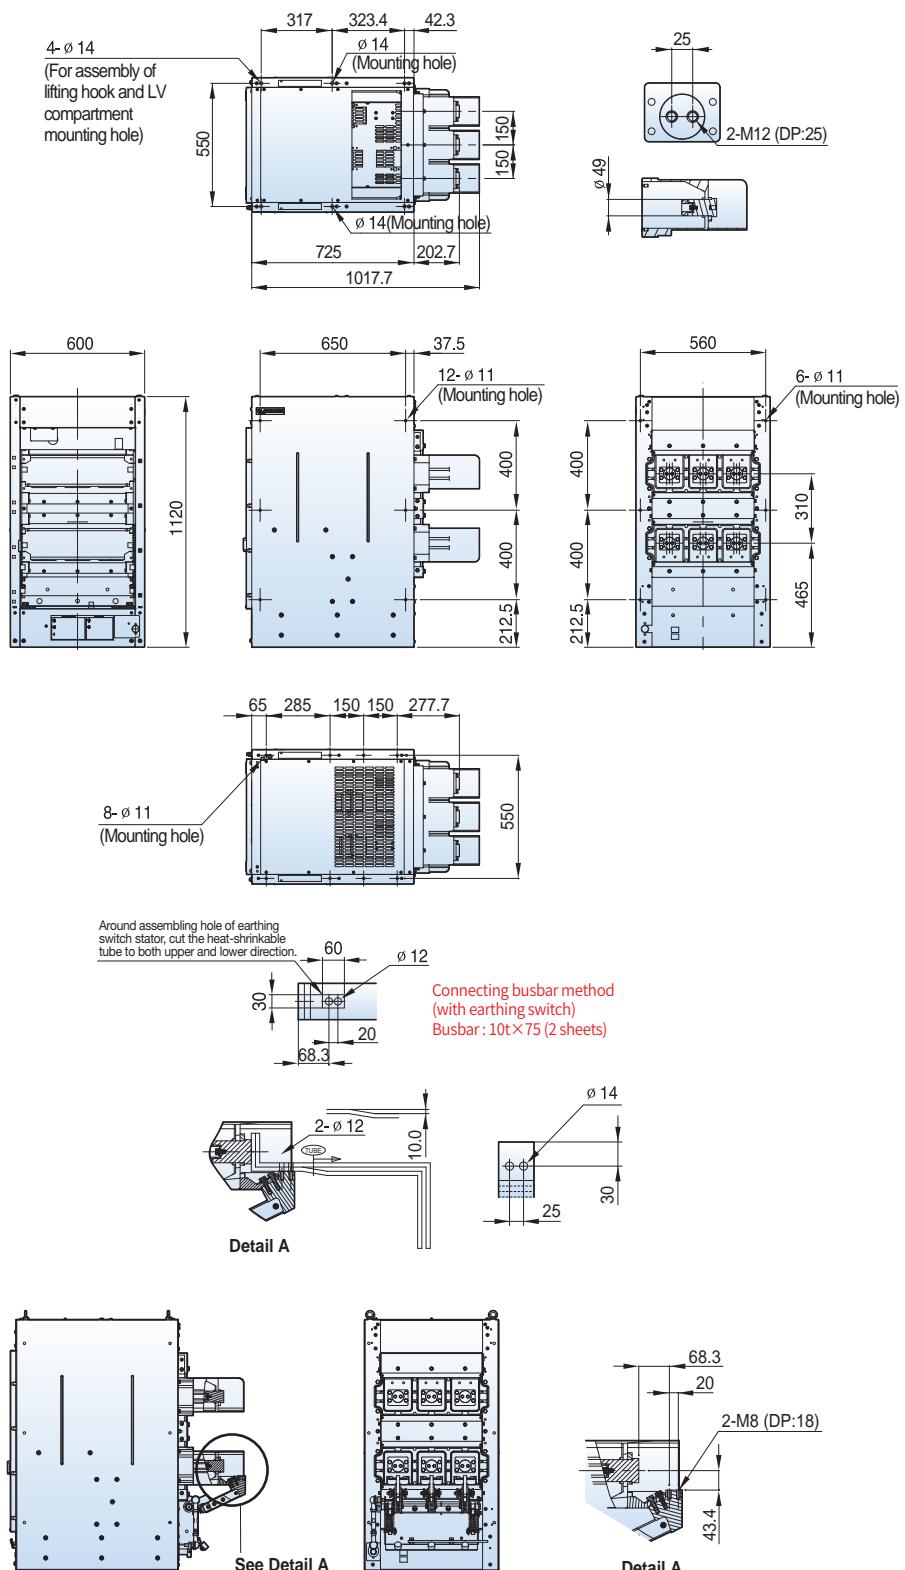




# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 20/25kA, 2000A**

**Withdrawable**

■ H type cradle, phase distance 210mm

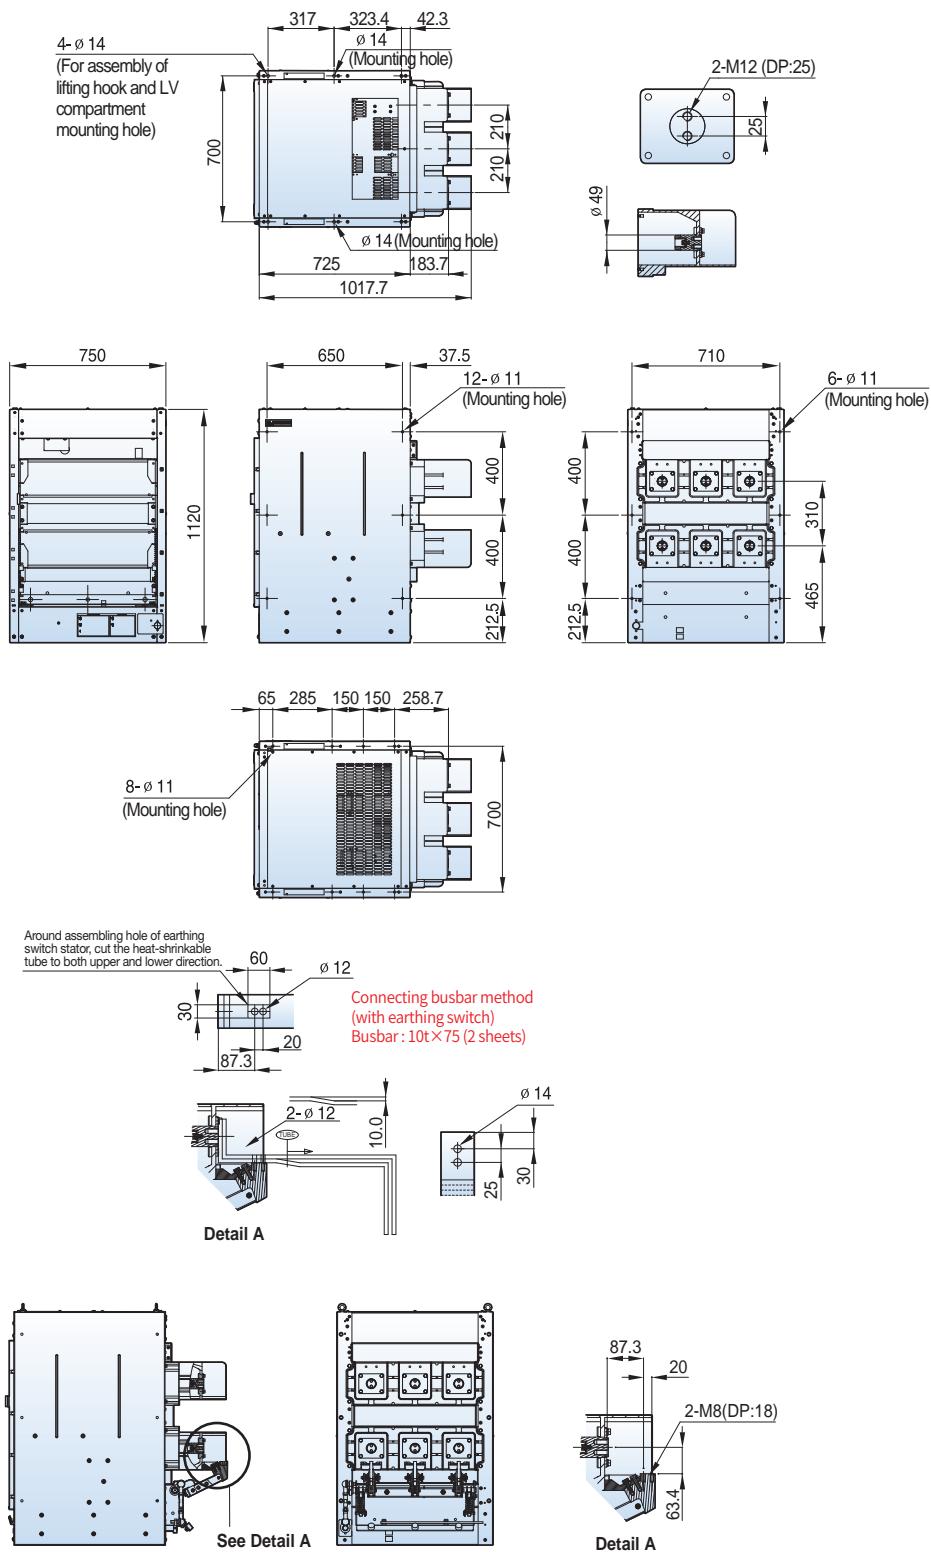

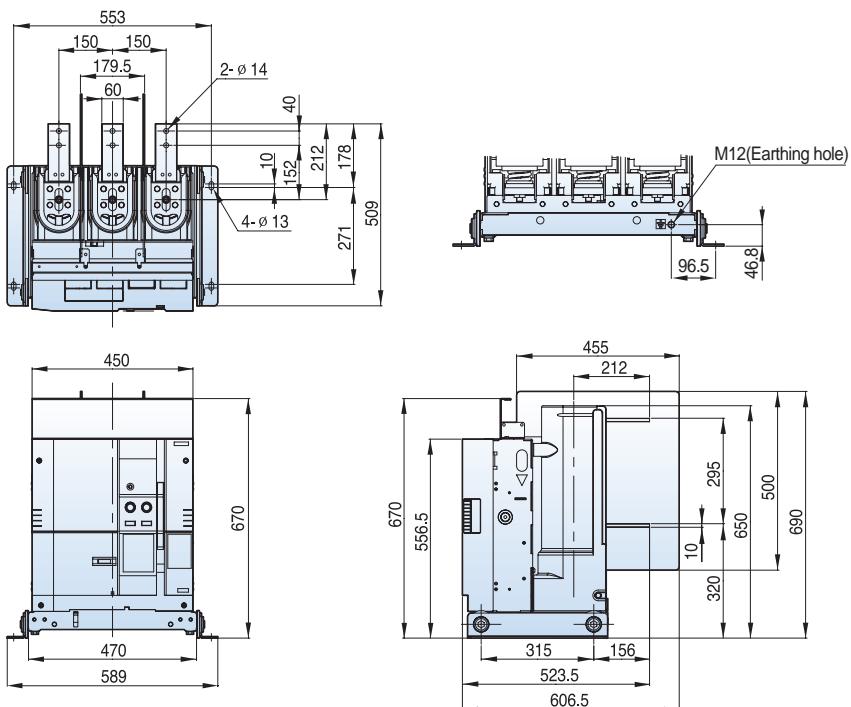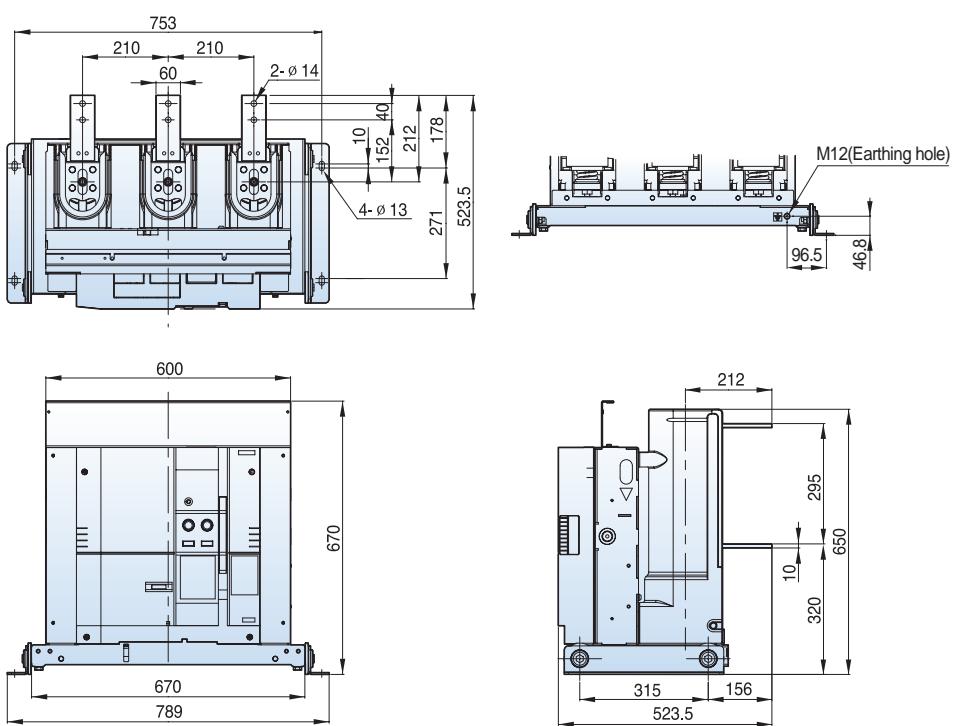
**12/17.5kV, 31.5kA, 630/1250A****Fixed****■ P type, phase distance 150mm****Fixed****■ P type, phase distance 210mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**7.2/12kV, 31.5kA, 1250/2000A**


**Withdrawable**







■ Gs type unit, phase distance 150mm

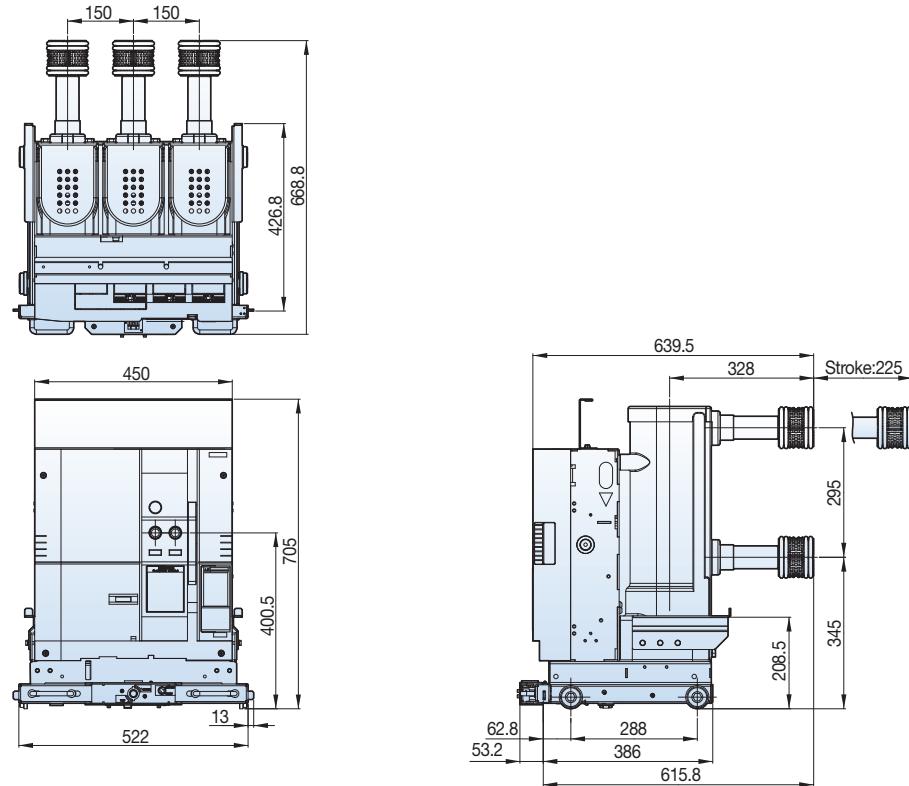

**Withdrawable**

■ Gs type cradle, phase distance 150mm

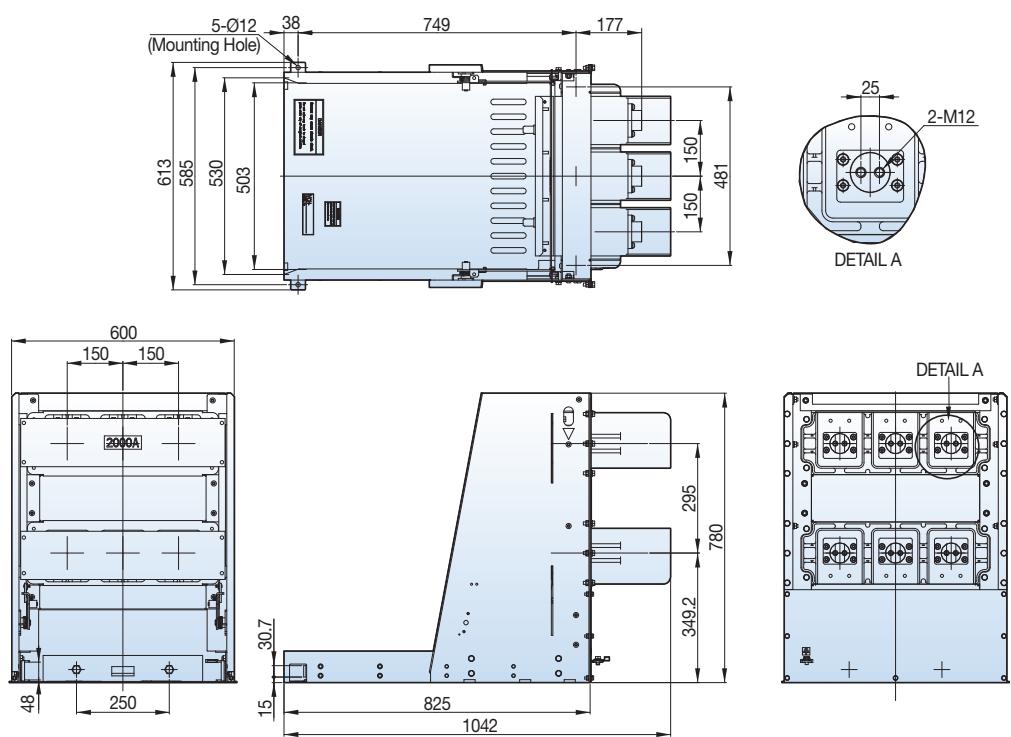

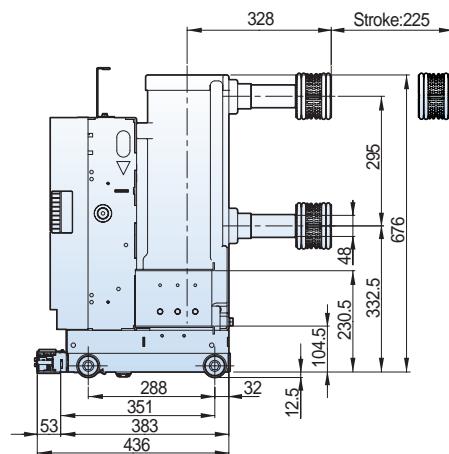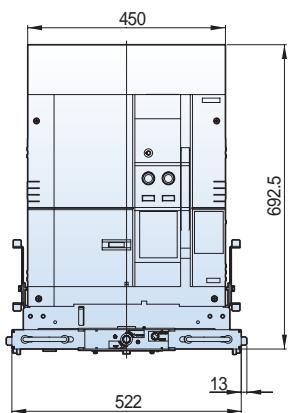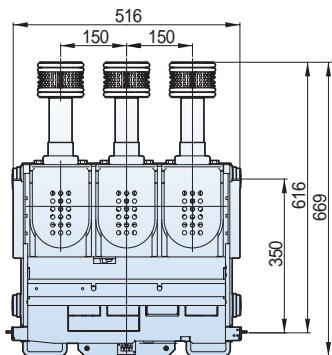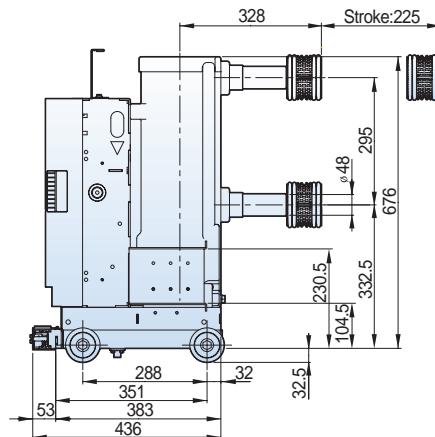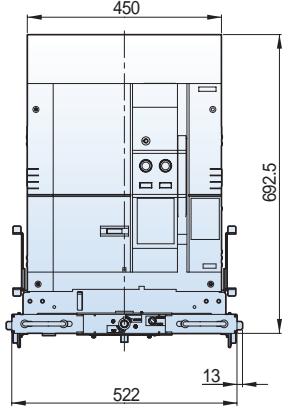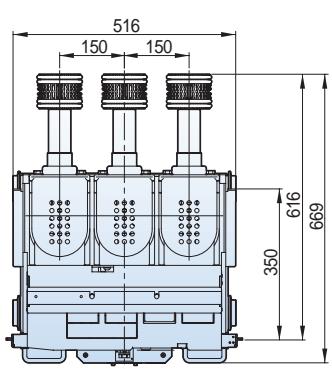
**12kV, 31.5kA, 1250A****Withdrawable****■ K type unit T type, phase distance 150mm****Withdrawable****■ K type unit T2 type, phase distance 150mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**12kV, 31.5kA, 1250A**


**Withdrawable**

■ G type cradle T type, phase distance 150mm

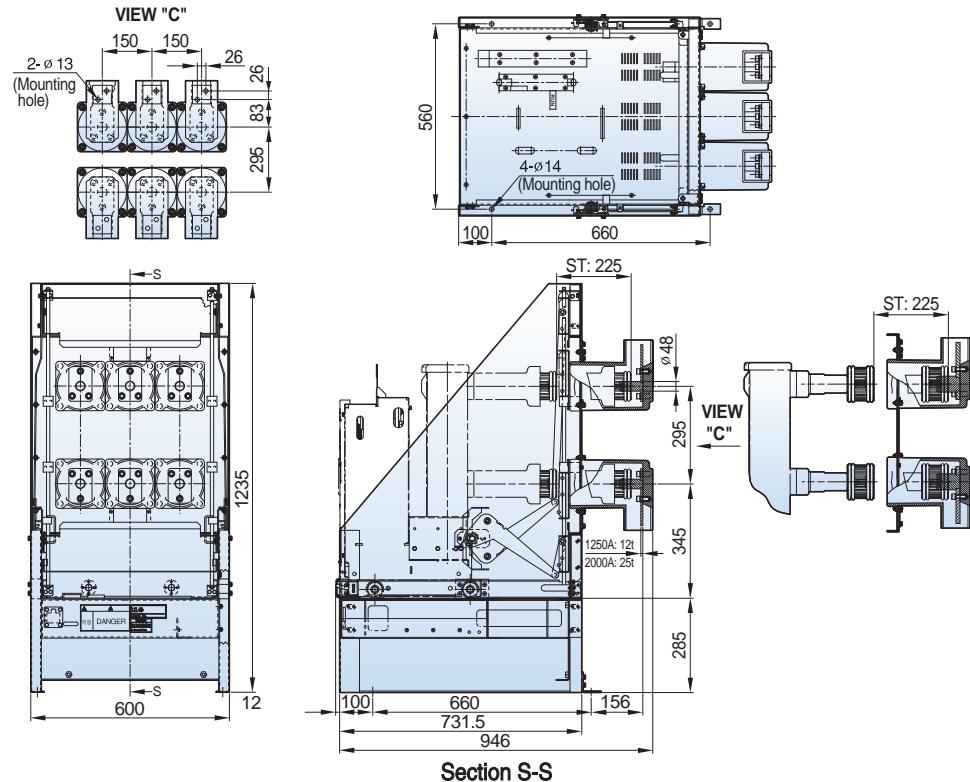

**Withdrawable**




■ MCSG cradle T2 type, phase distance 150mm

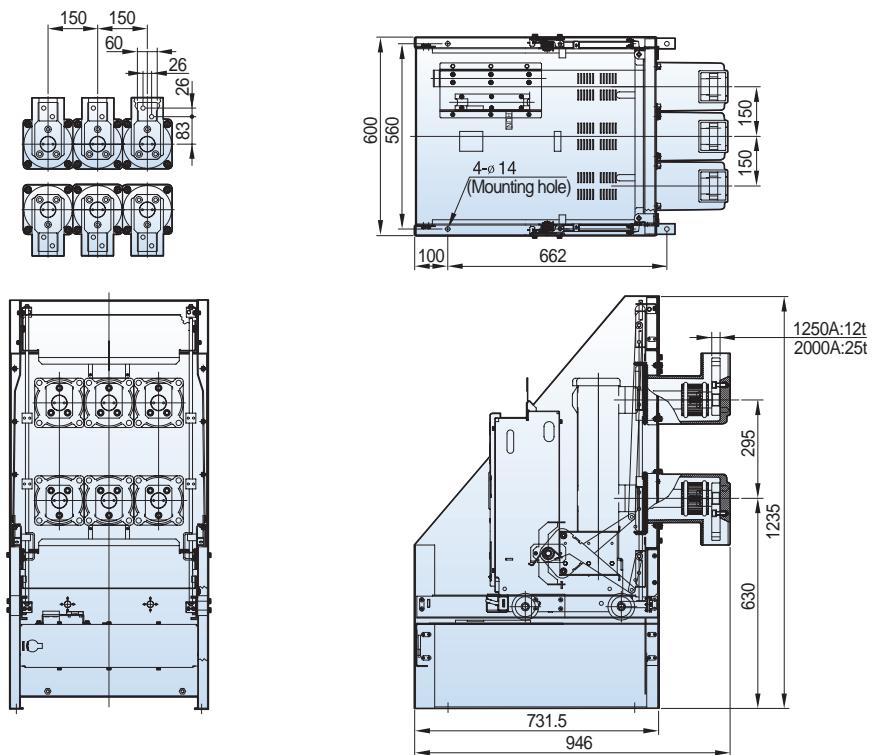

## 12kV, 31.5kA, 2000A




**Withdrawable**

■ K type unit T type, phase distance 150mm

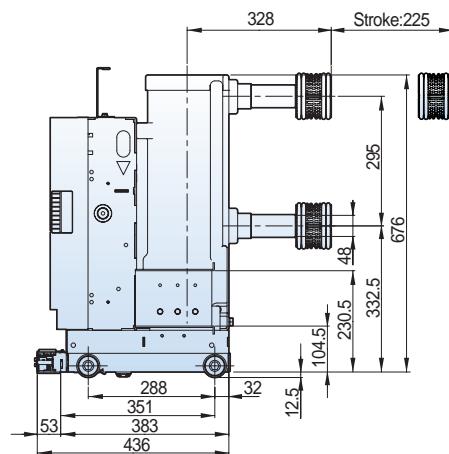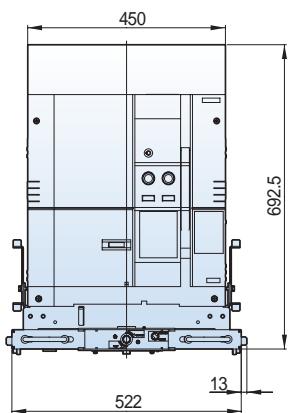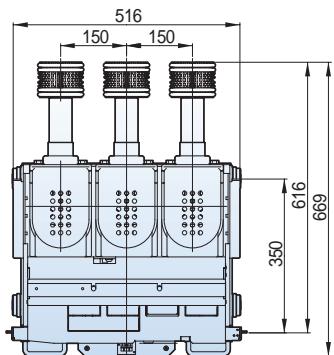

**Withdrawable**

■ K type unit T2 type, phase distance 150mm

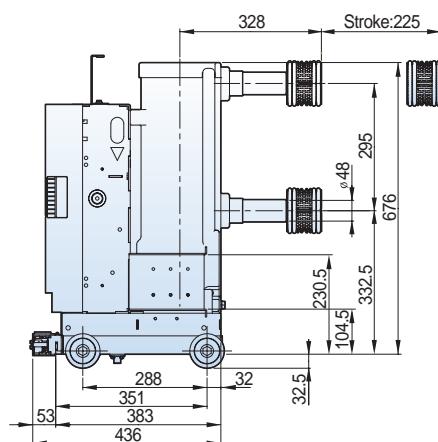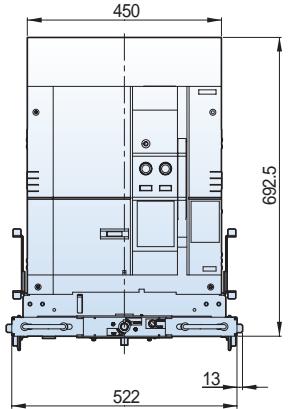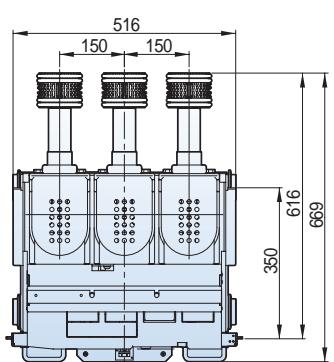


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12kV, 31.5kA, 2000A**


**Withdrawable**

■ G type cradle T type, phase distance 150mm

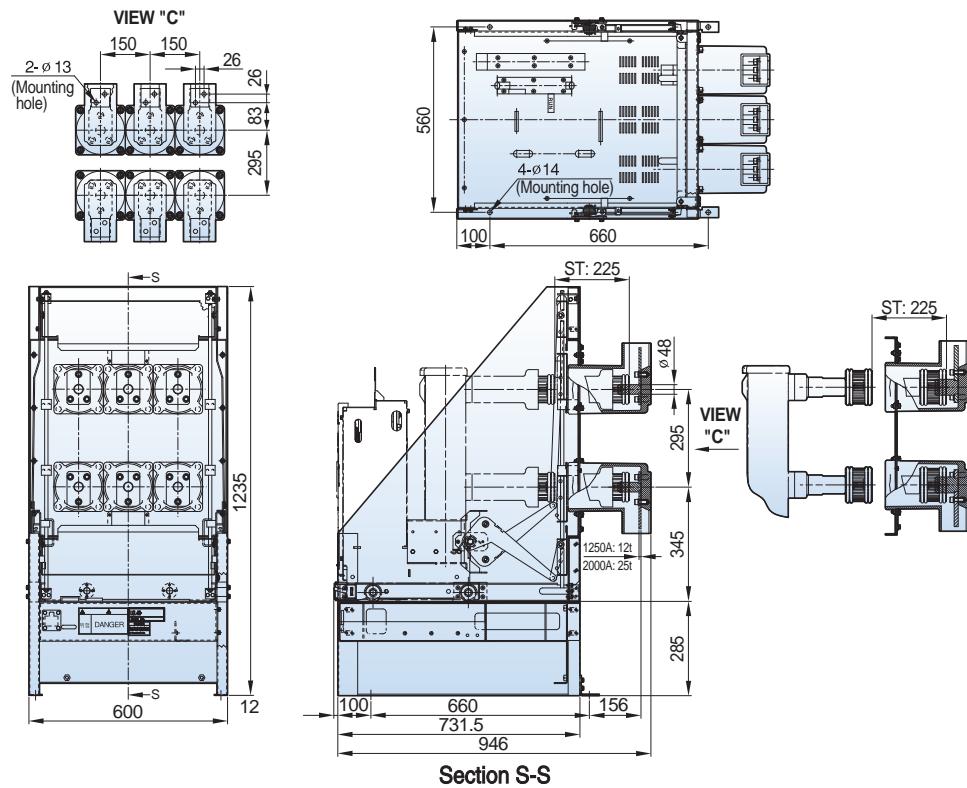

**Withdrawable**


■ MCSG cradle T2 type, phase distance 150mm

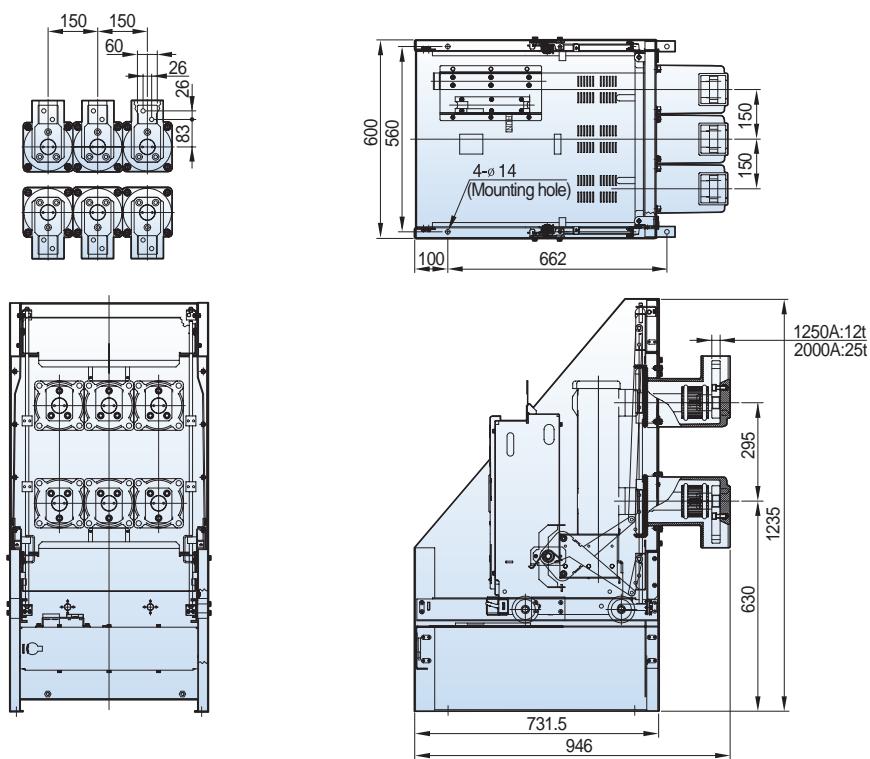

## 12/17.5kV, 31.5kA, 630/1250A


### Withdrawable

#### ■ H type unit, phase distance 150mm

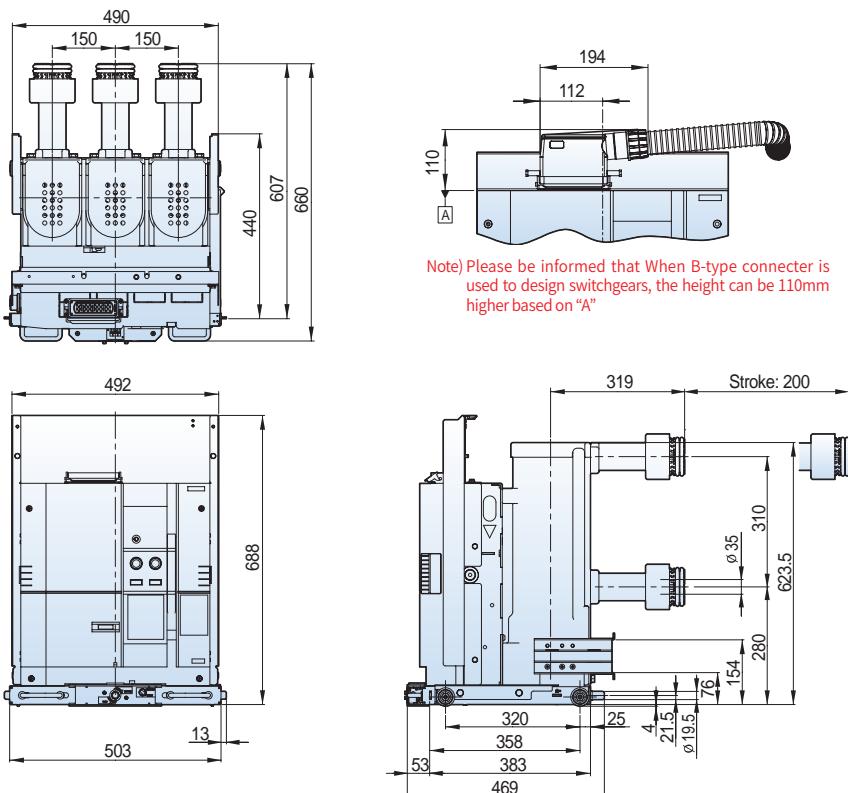

### Withdrawable

#### ■ H type unit, phase distance 210mm

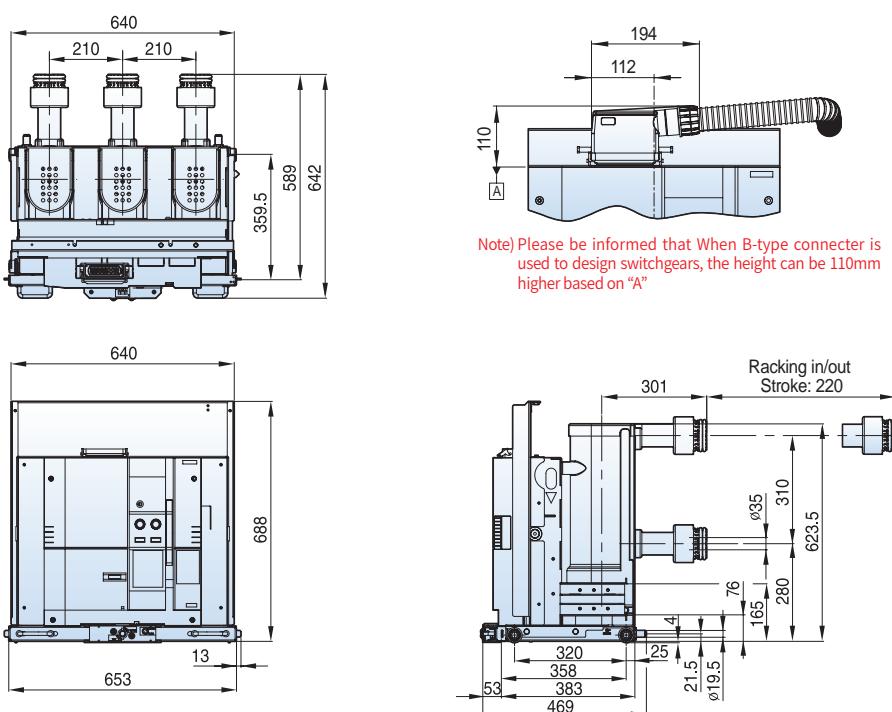


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12kV, 31.5kA, 630/1250A**


## Withdrawable

### ■ Ha type cradle, phase distance 150mm

Type
VCL-12Ha32A06
VCL-12Ha32A13

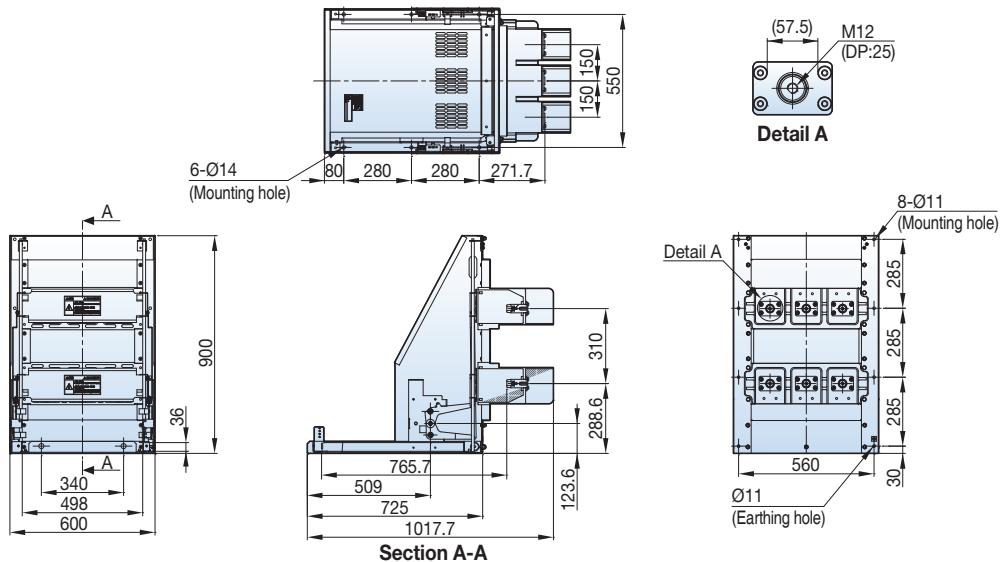


### ■ Ha type cradle, phase distance 150mm (Earthing S/W Option type)

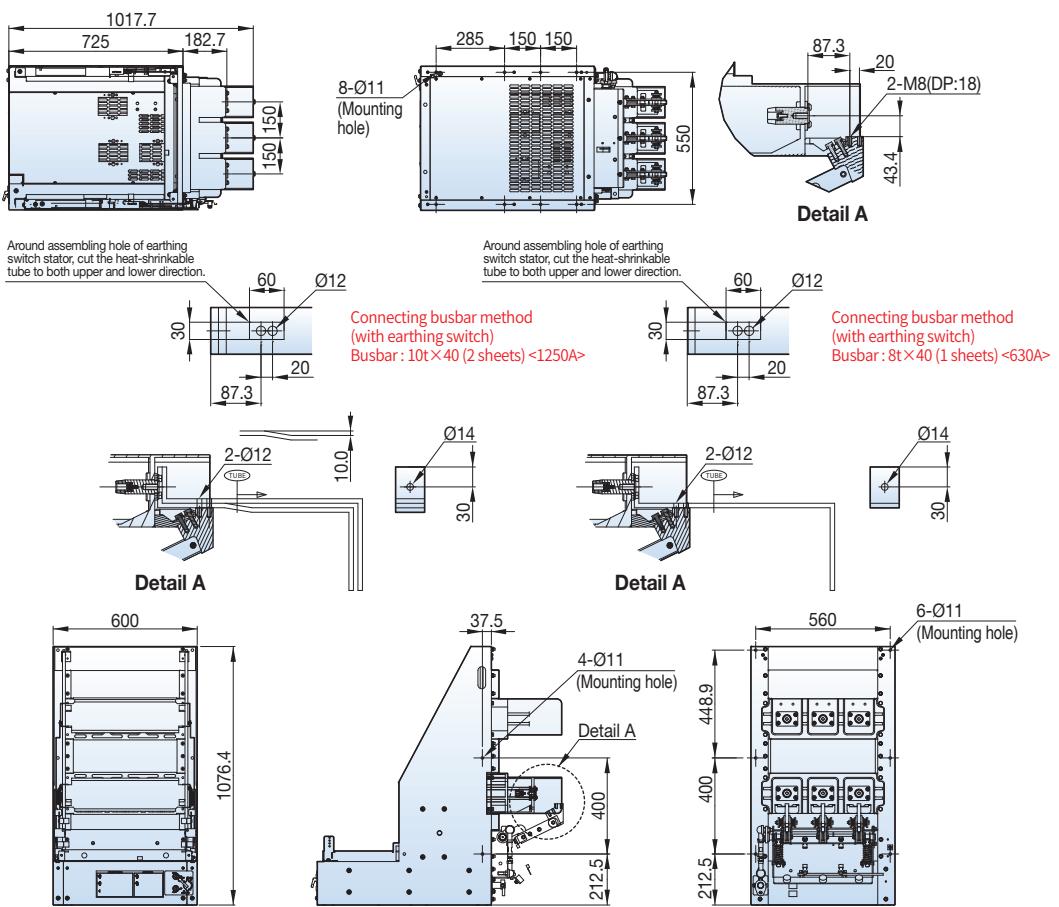

## 12/17.5kV, 31.5kA, 630/1250A

### Withdrawable

#### H type cradle, phase distance 150mm

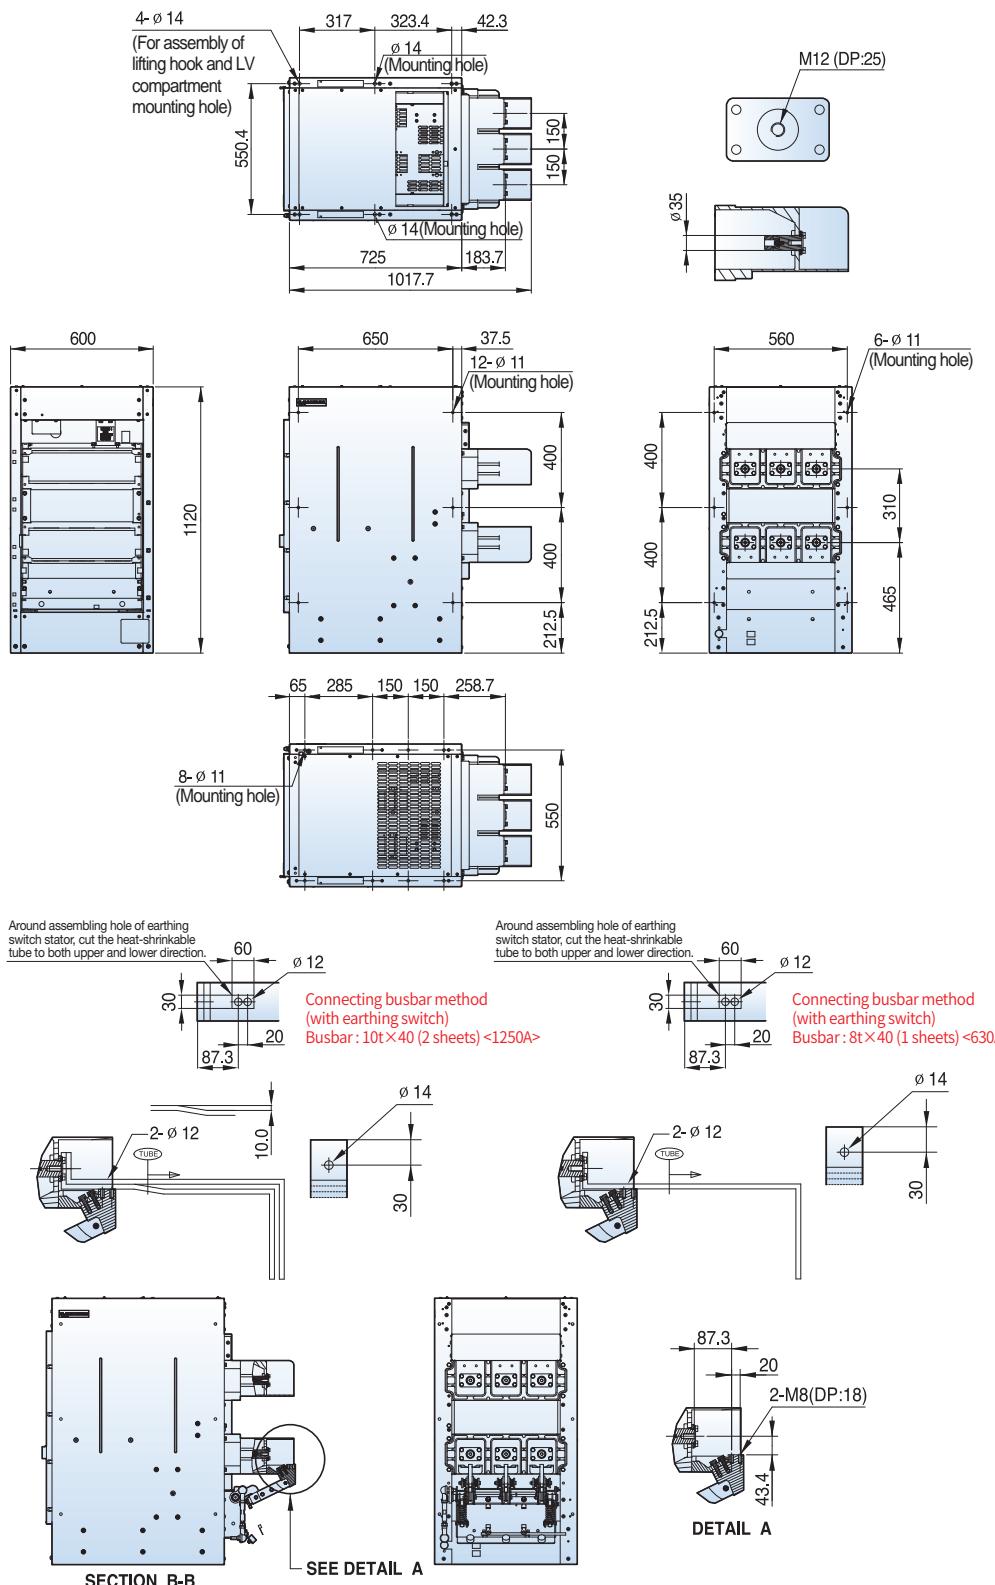


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 31.5kA, 630/1250A**

**Withdrawable**


■ H type cradle, phase distance 210mm

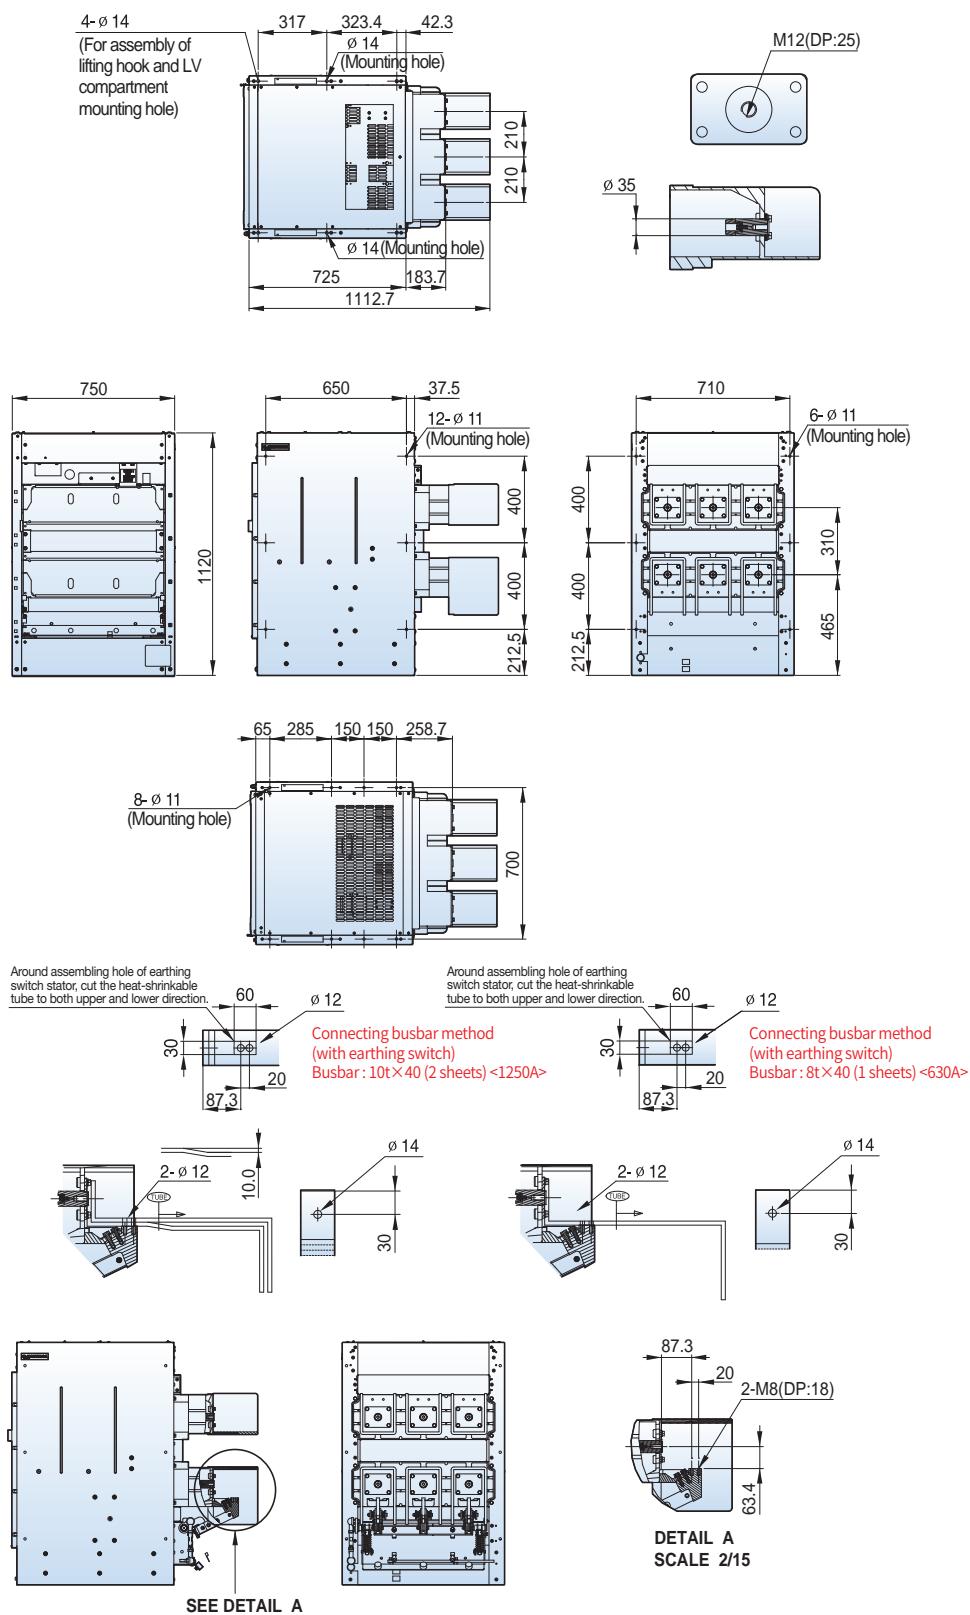

## 12/17.5kV, 31.5kA, 2000A


### Fixed

#### ■ P type, phase distance 210mm


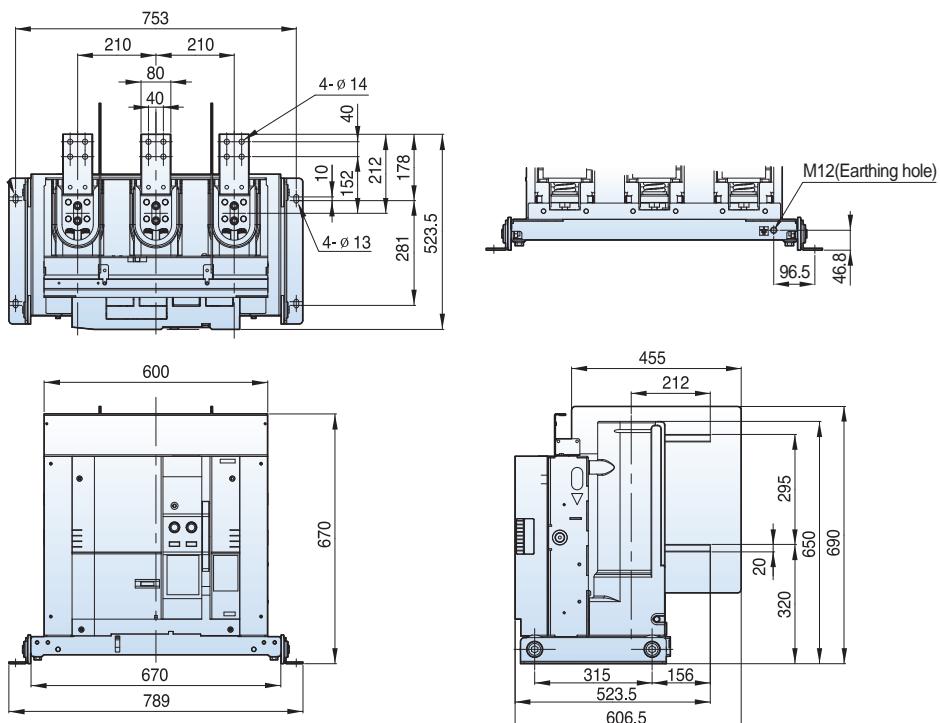


### Withdrawable

#### ■ H type unit, phase distance 150mm

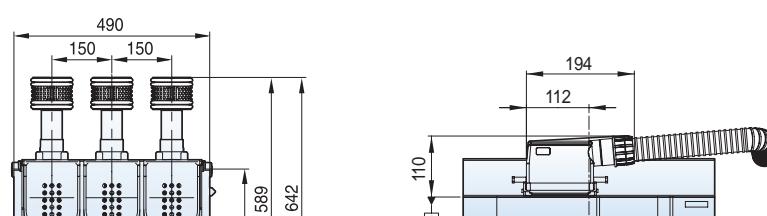

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

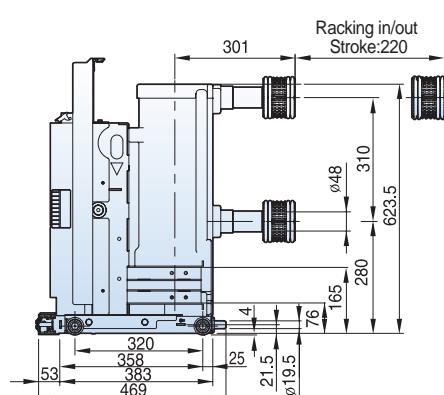
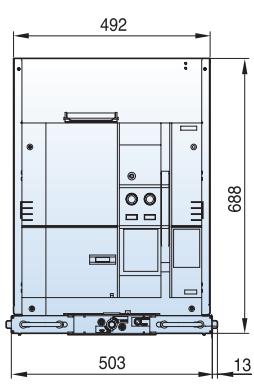


# Dimensions - VL type (VL-06/12/17/20/25/36)



**12/17.5kV, 31.5kA, 2000A**

**Withdrawable**

■ H type unit, phase distance 210mm

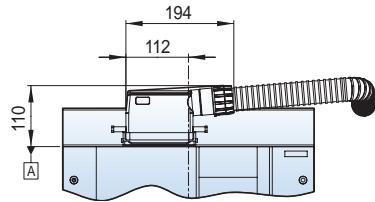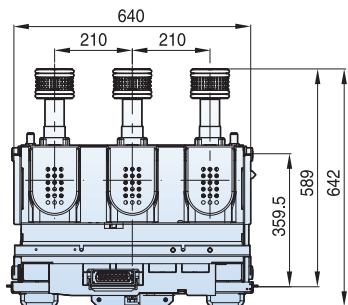

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

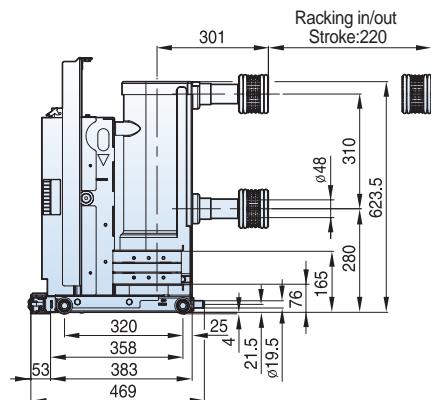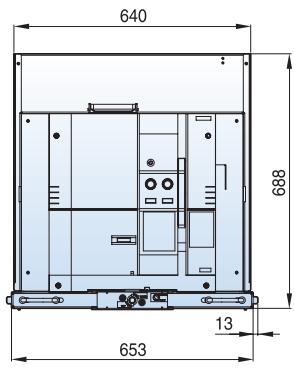


## 12kV, 31.5kA, 2000A


### Withdrawable

#### ■ Ha type cradle, phase distance 150mm

Type  
VCL-12Ha32A20

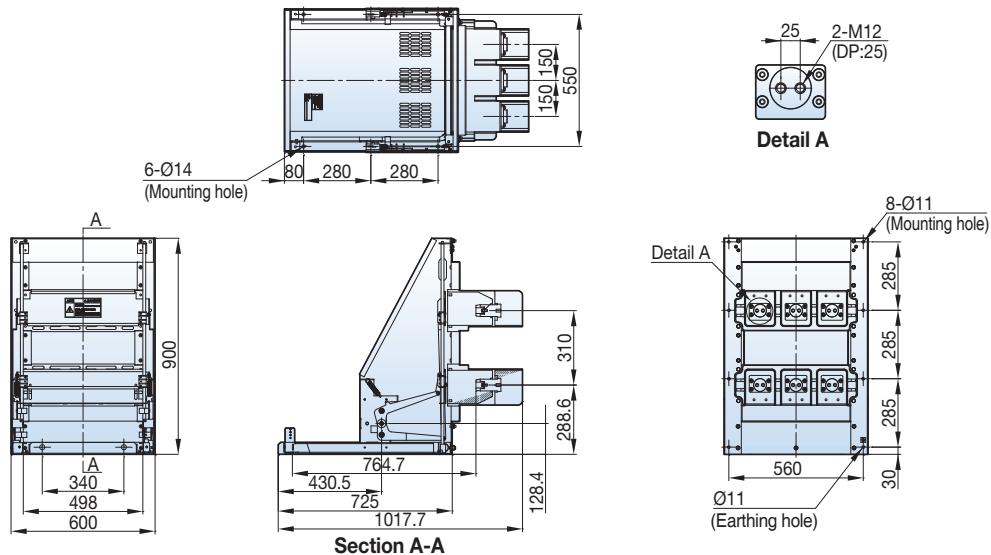

#### Ha type cradle, phase distance 150mm (Earthing S/W Option type)

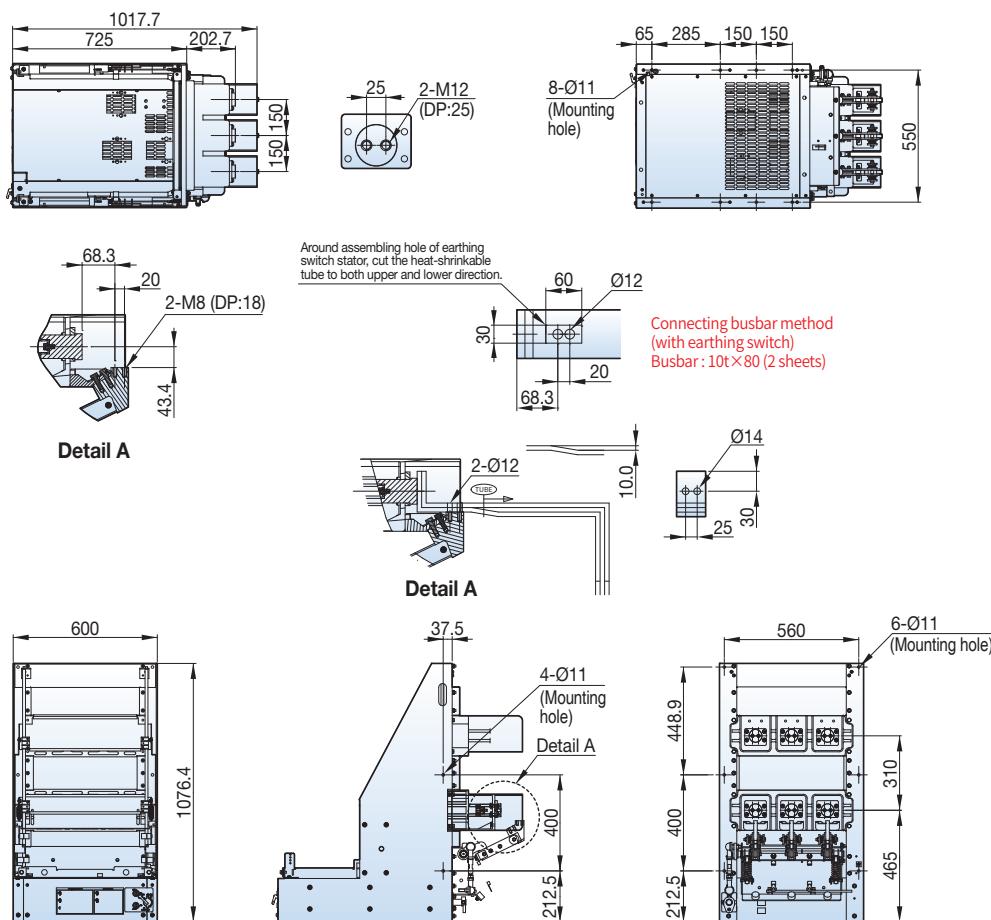


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 31.5kA, 2000A**

**Withdrawable**


**H type cradle, phase distance 150mm**

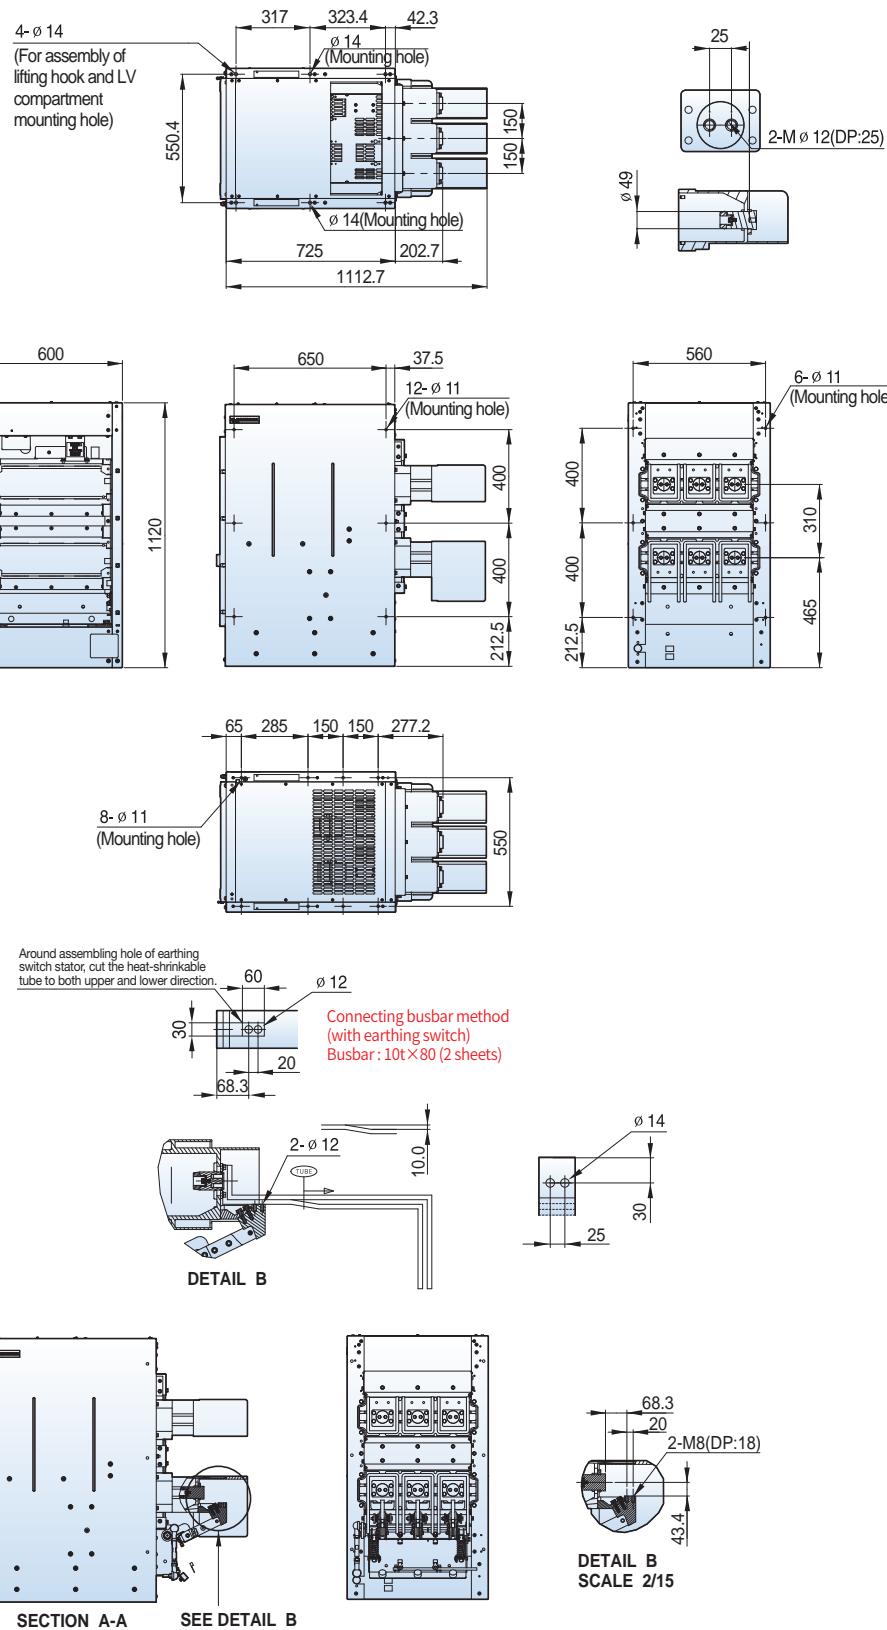

## 12/17.5kV, 31.5kA, 2000A

### Withdrawable

#### H type cradle, phase distance 210mm

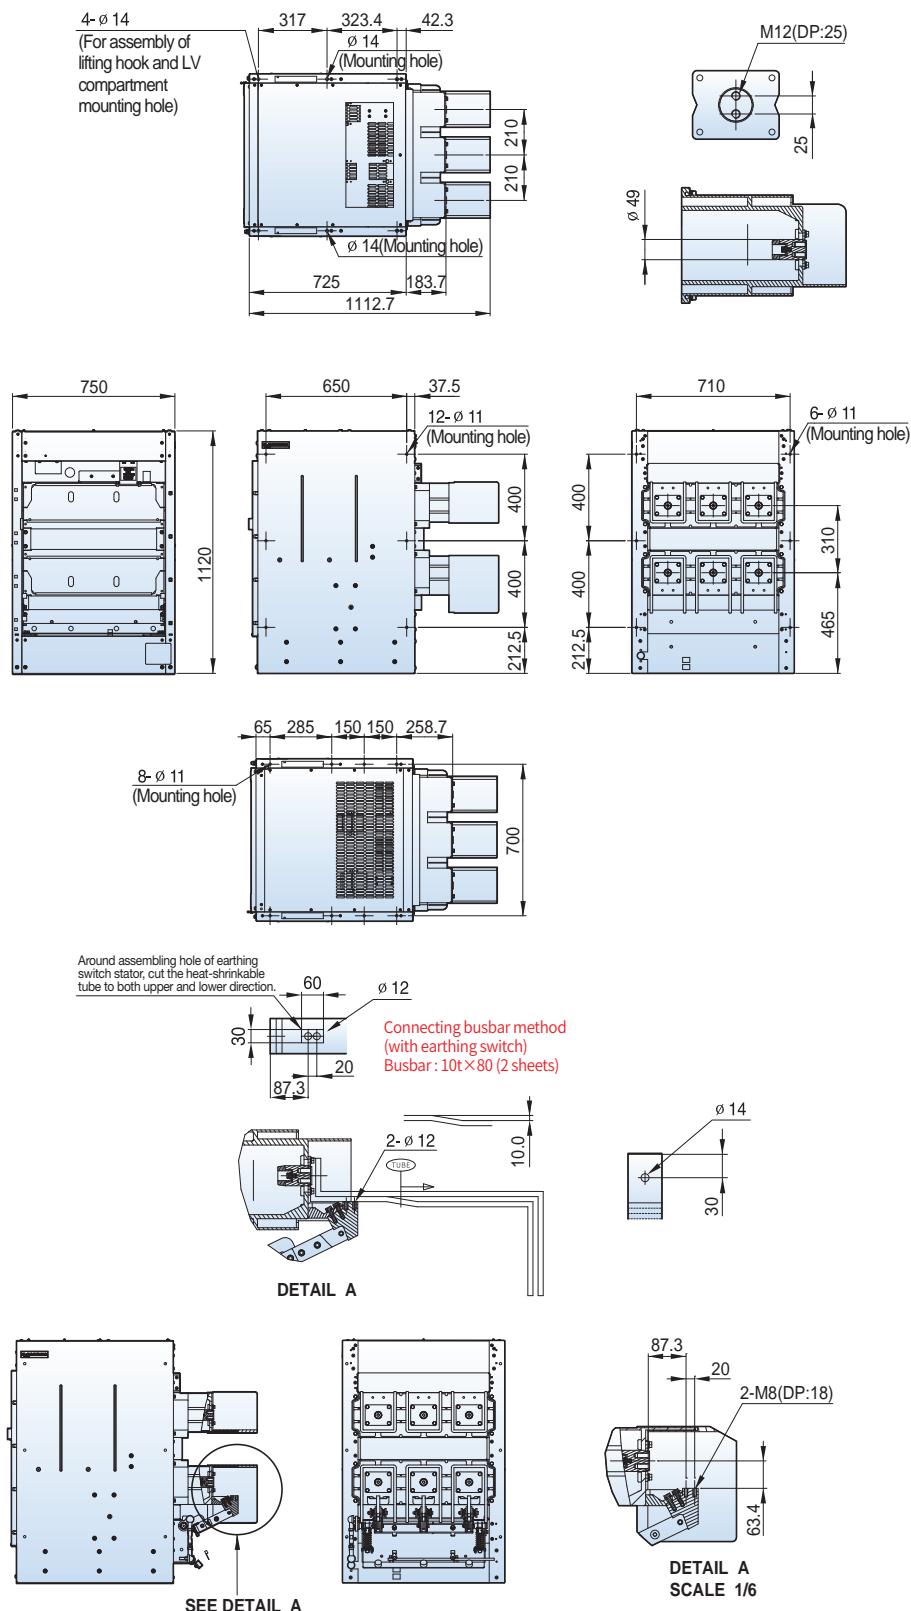


# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 31.5kA, 2500A**


**Fixed**

■ P type, phase distance 210mm

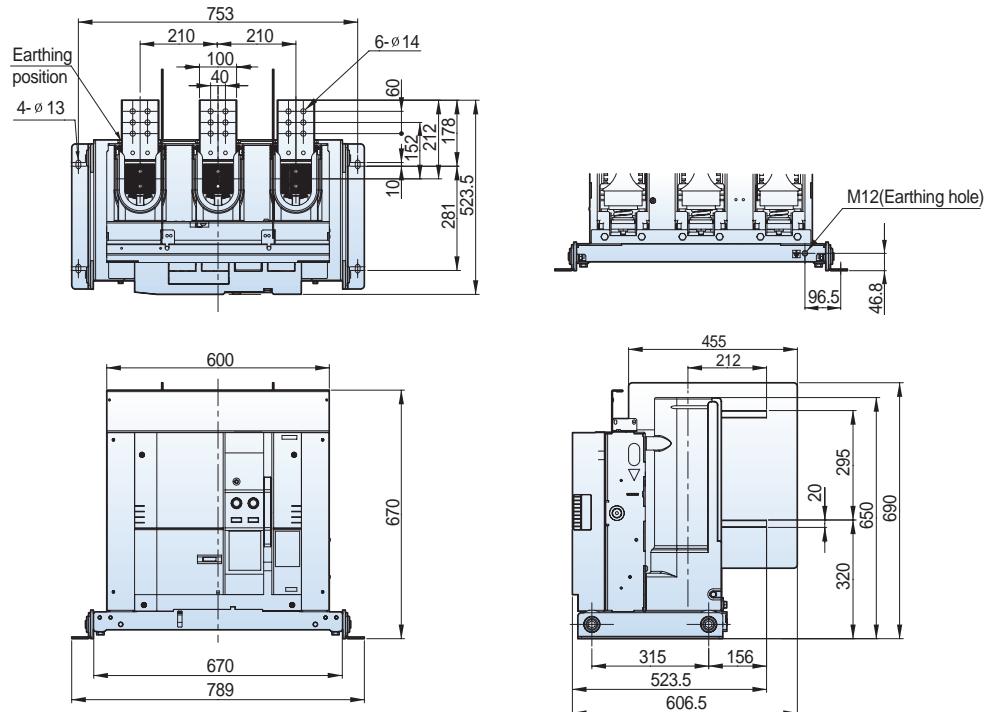

**Fixed**



■ P type, phase distance 275mm

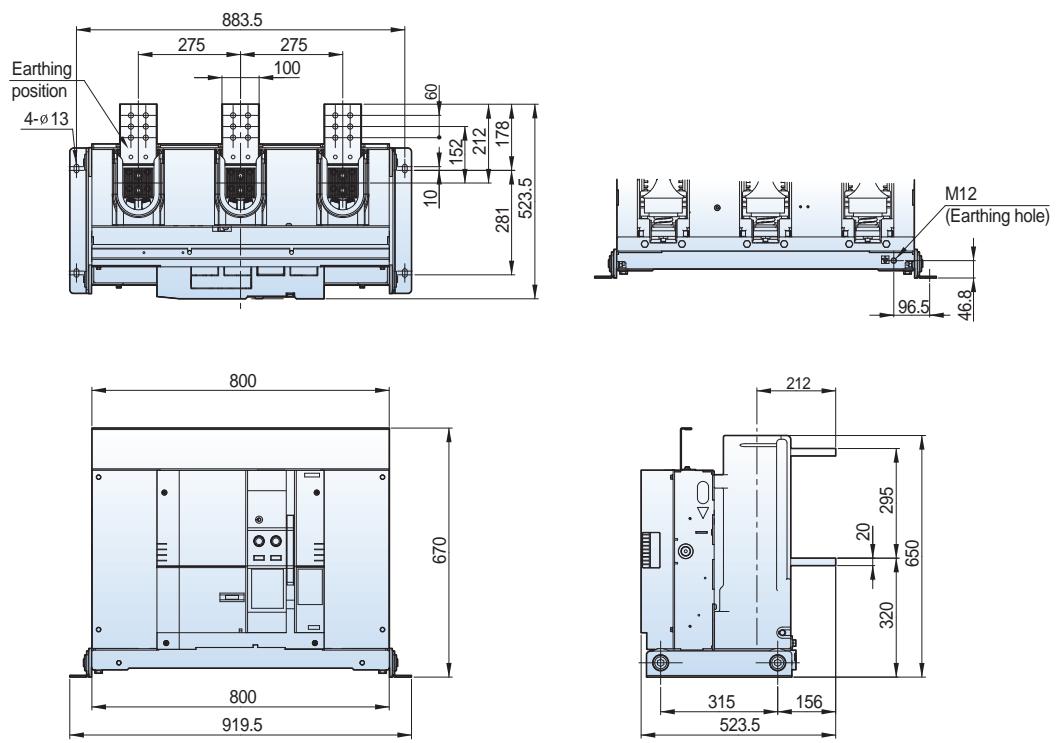



## 12/17.5kV, 31.5kA, 2500A

### Withdrawable

#### ■ H type unit, phase distance 210mm

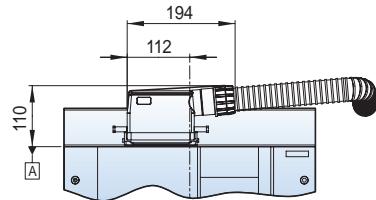
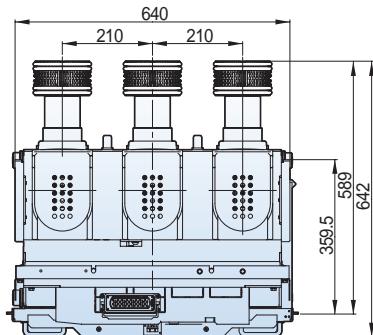


Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

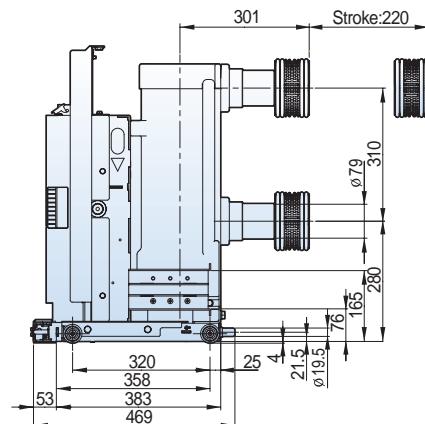
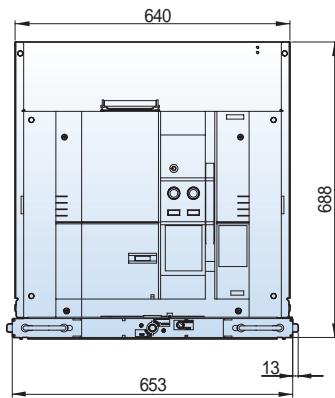


### Withdrawable

#### ■ H type unit, phase distance 275mm

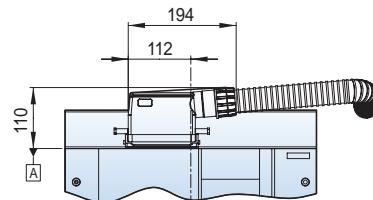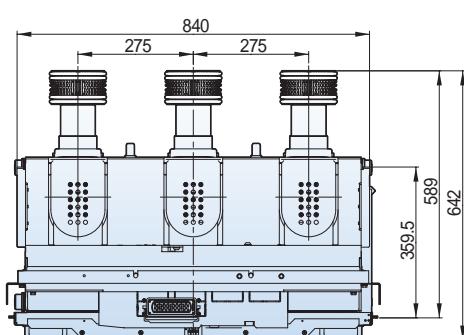

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

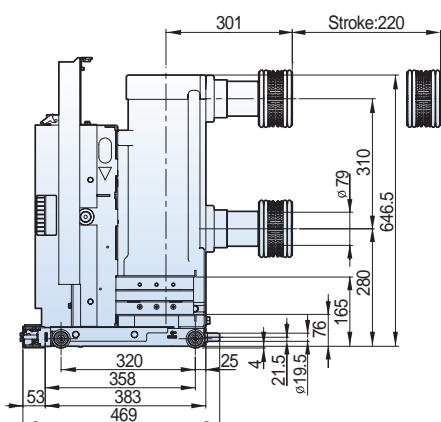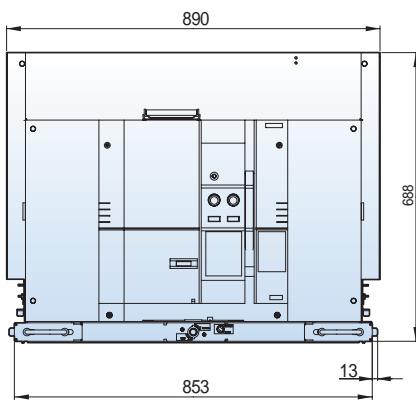



# Dimensions - VL type (VL-06/12/17/20/25/36)

**12/17.5kV, 31.5A, 2500A**

**Withdrawable**

■ H type cradle, phase distance 210mm

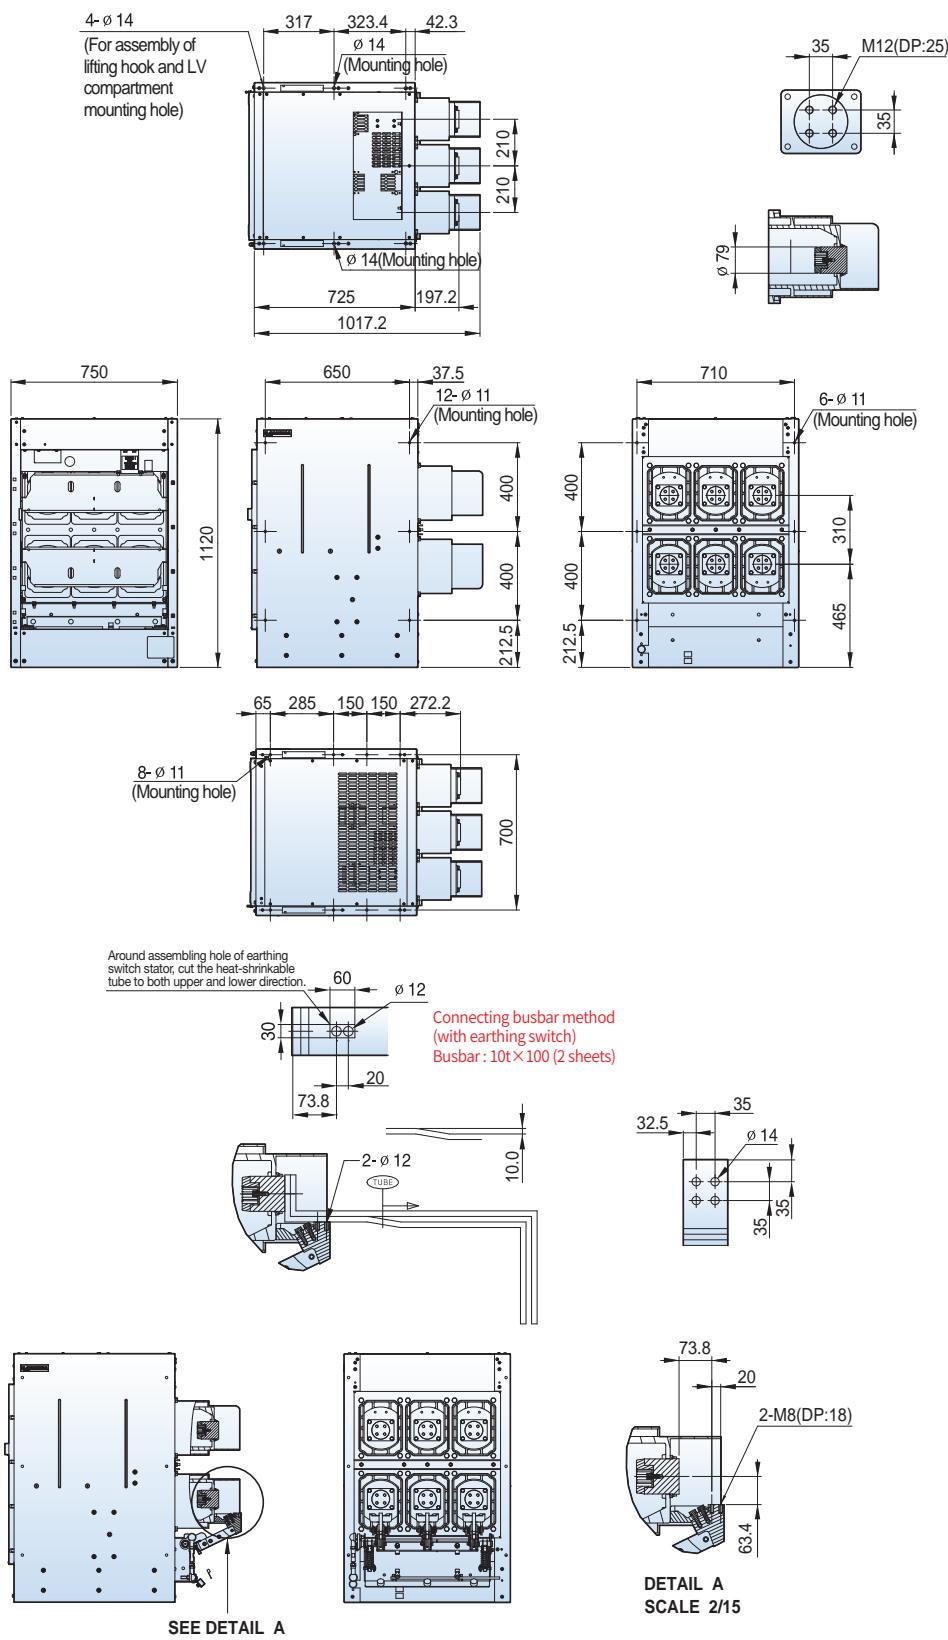

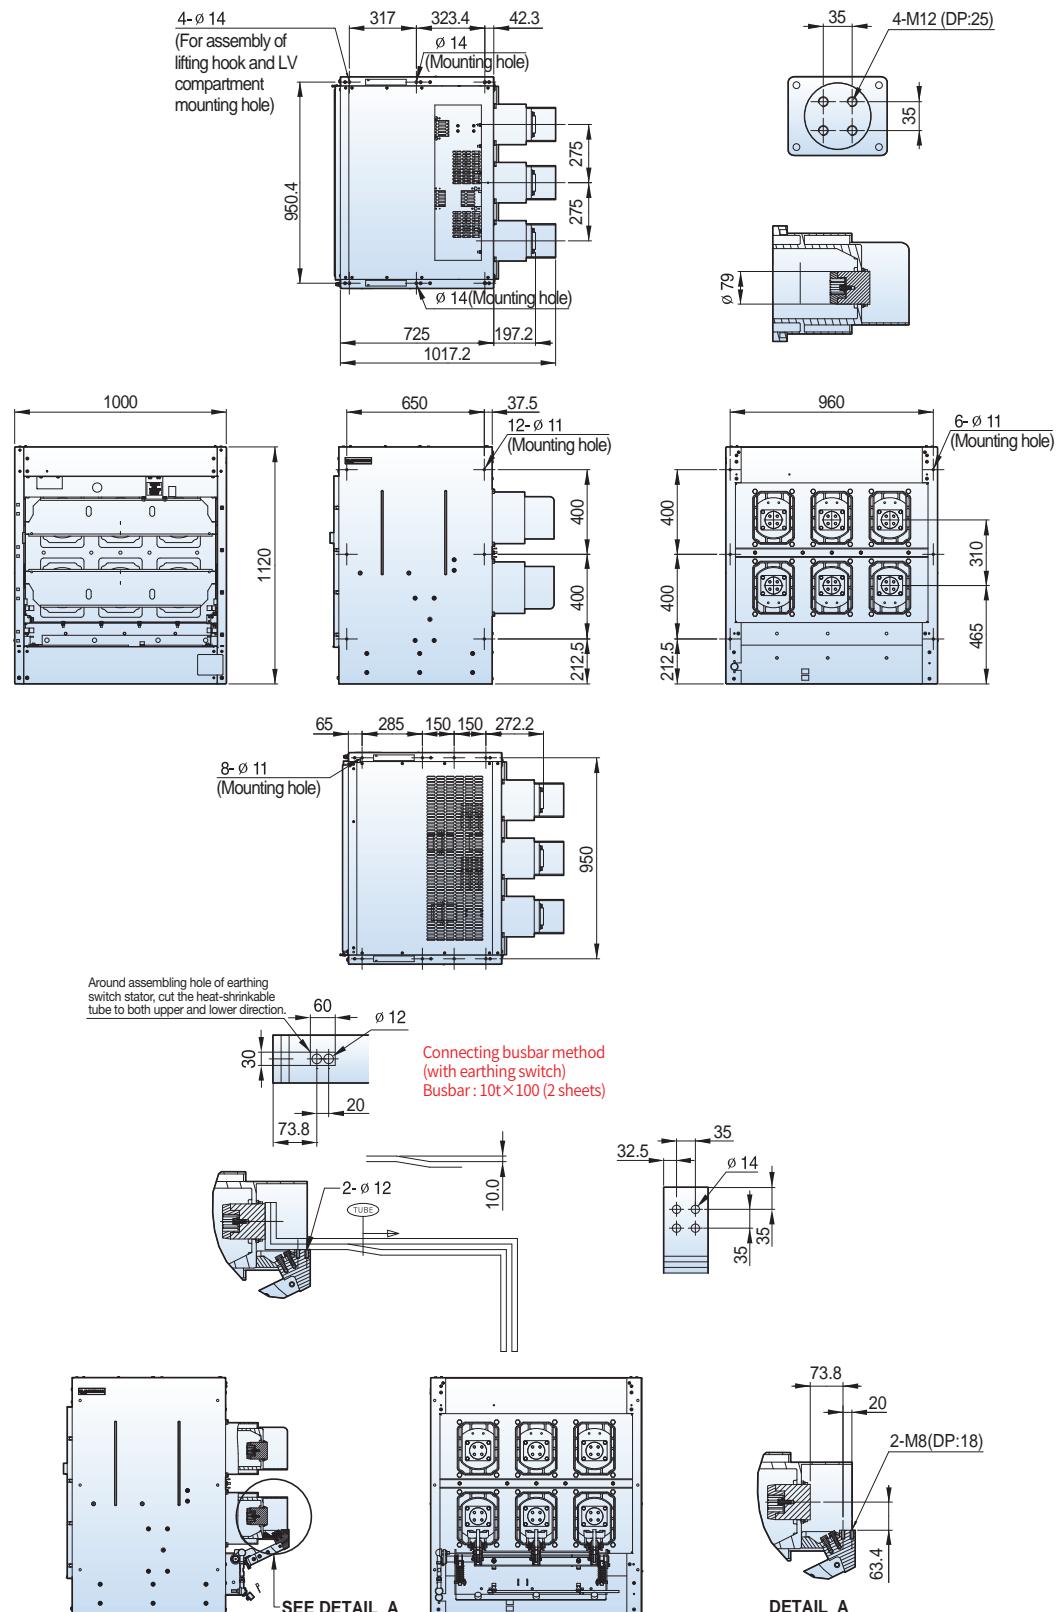
**12/17.5kV, 31.5A, 2500A****Withdrawable****H type cradle, phase distance 275mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5kA 630A**


## Fixed



■ P type, phase distance 265mm

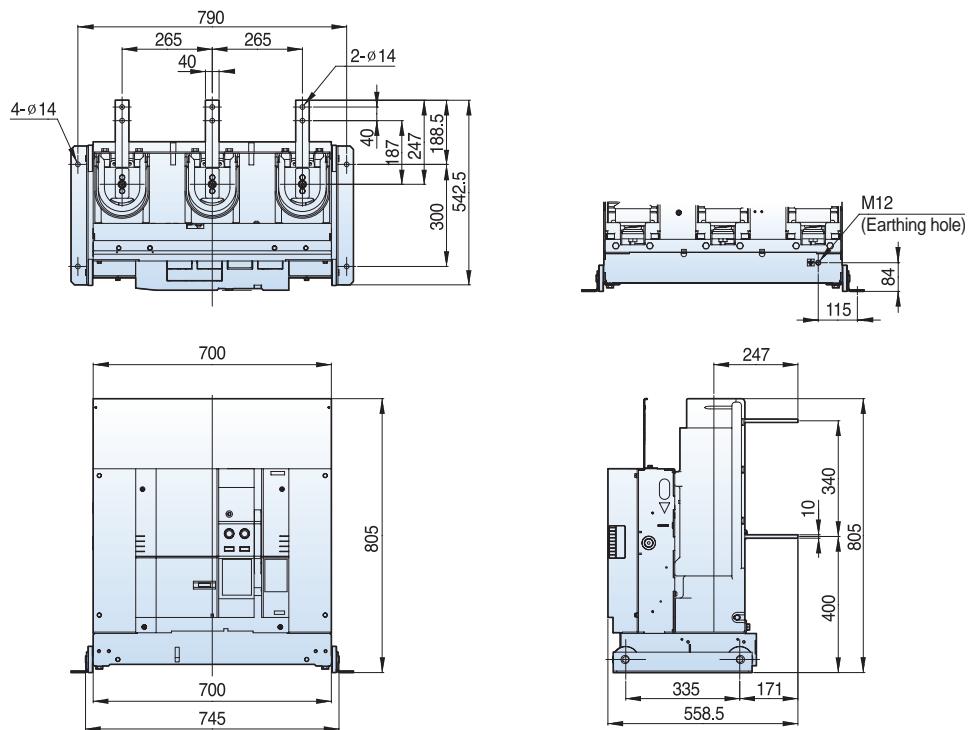

## Withdrawable

■ E type unit Visible, Clip contact, phase distance 265mm

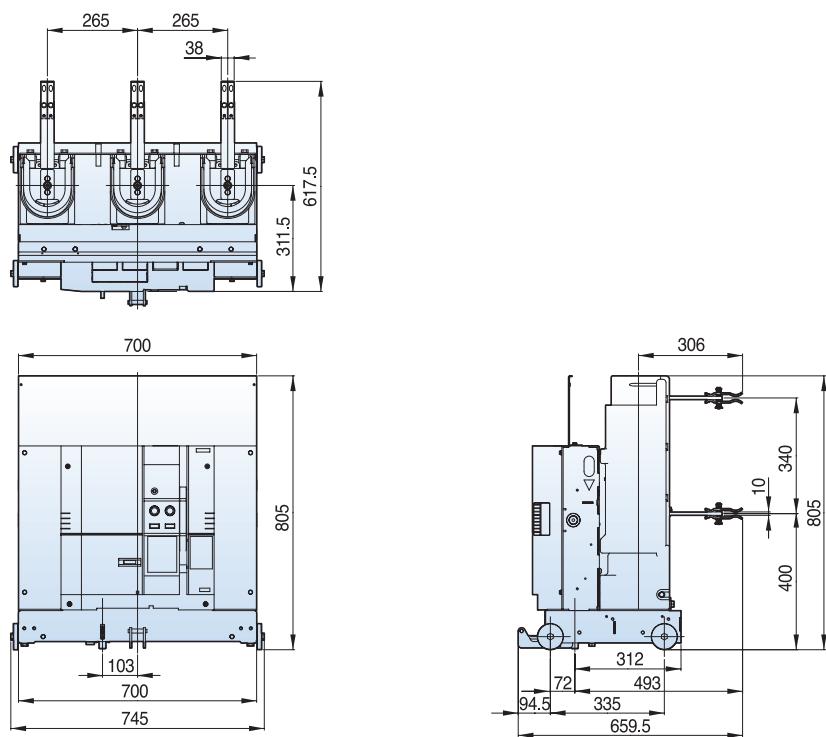

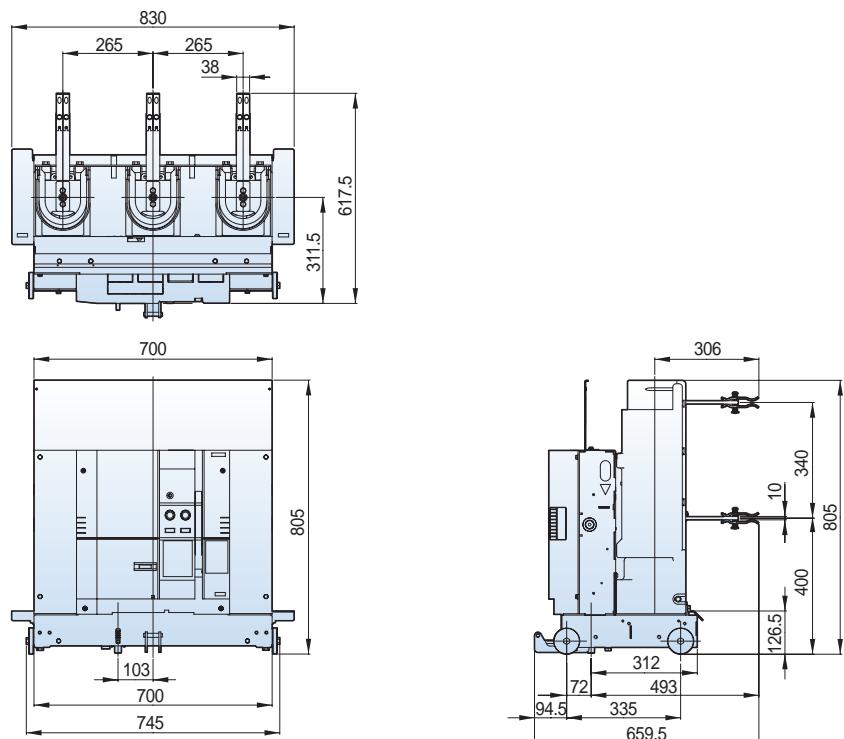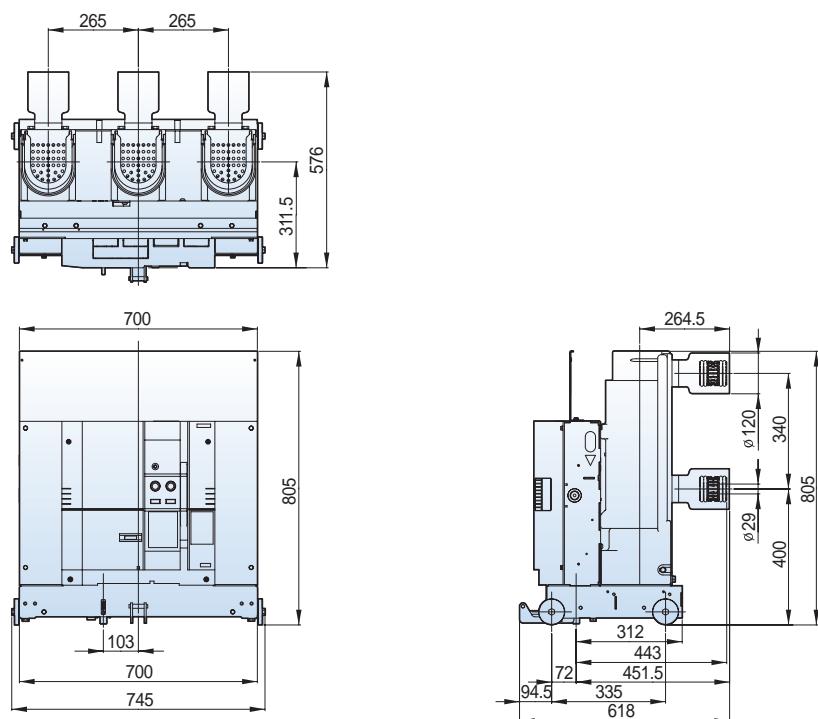
**24/25.8kV 12.5kA 630A****Withdrawable****■ F type unit Visible, Clip contact, phase distance 265mm****Withdrawable****■ E type unit Enclosed, Tulip contact, phase distance 265mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5kA 630A**


**Withdrawable**



■ F type unit Enclosed, Tulip contact, phase distance 265mm

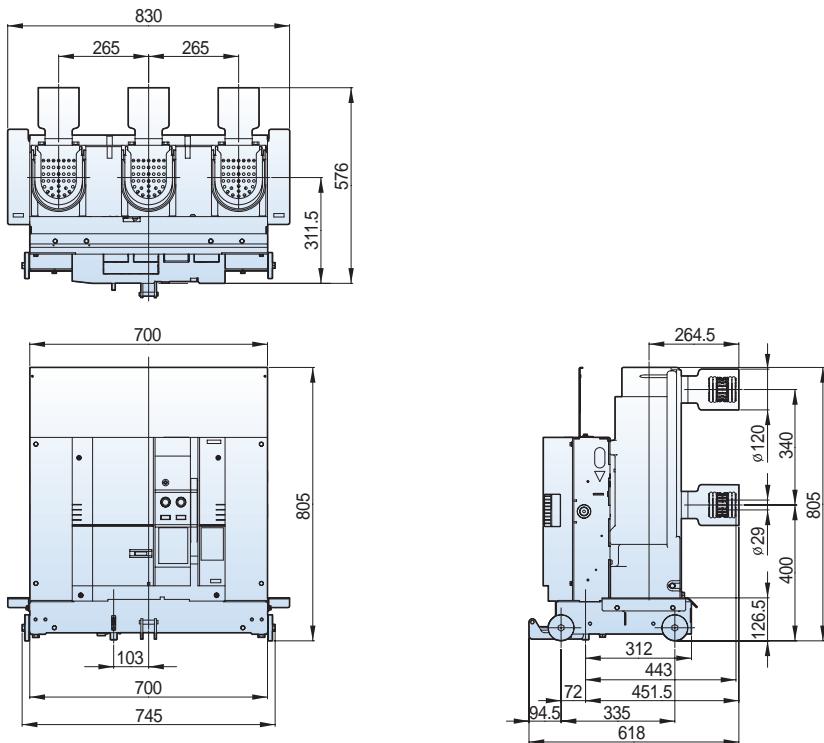

**Withdrawable**

■ G type unit Tulip contact, phase distance 265mm

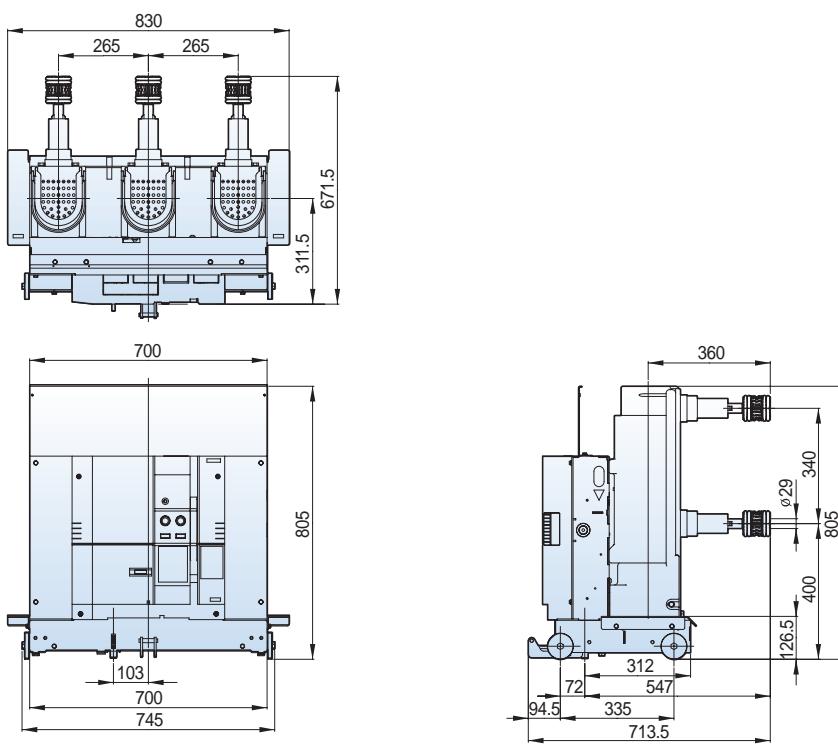


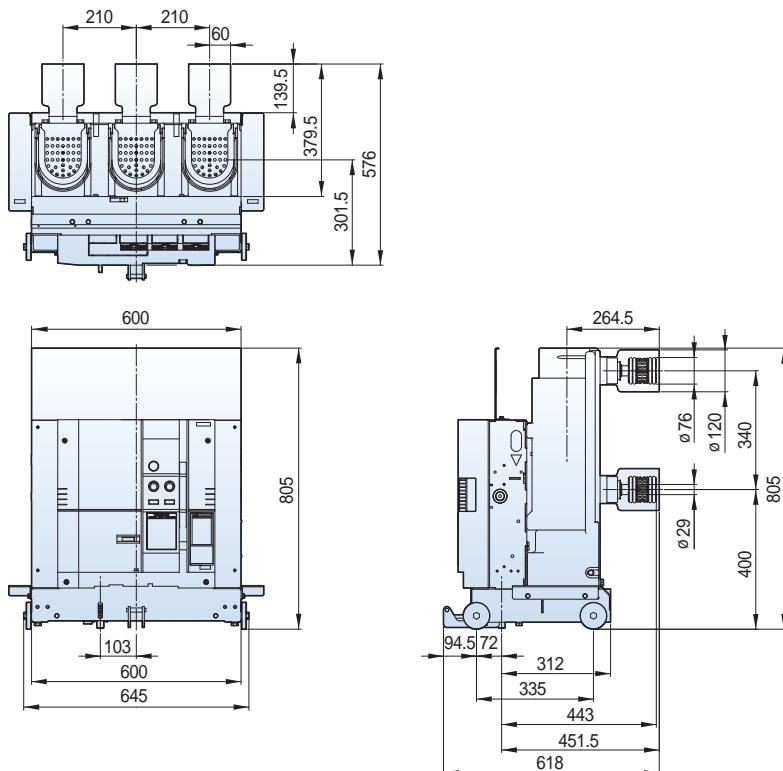
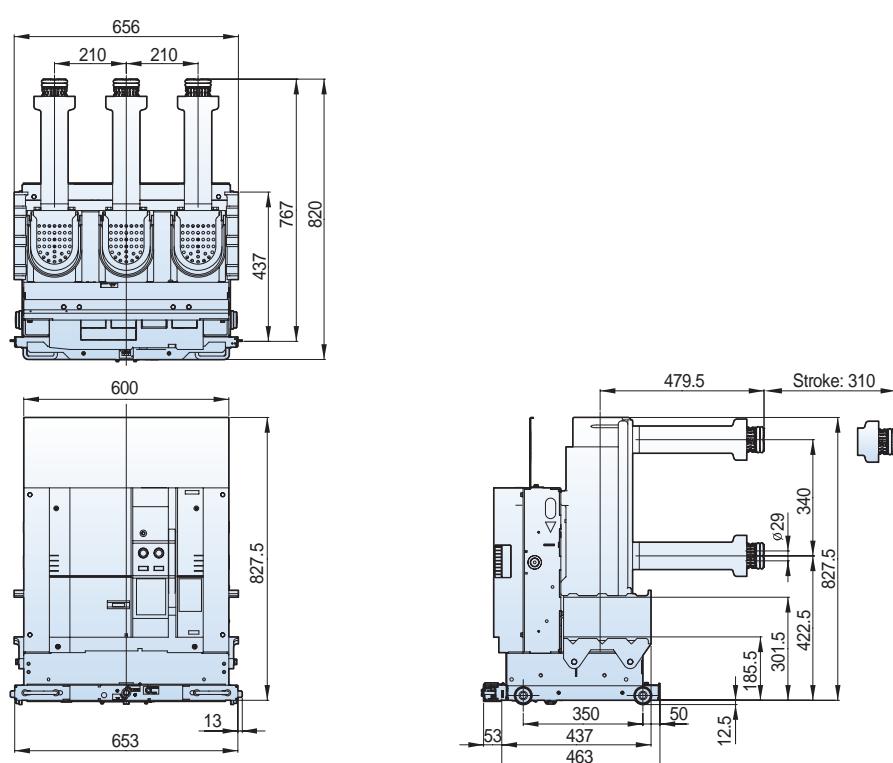
**24/25.8kV 12.5kA 630A****Withdrawable****■ G type unit, phase distance 210mm****Withdrawable****■ K type unit, phase distance 210mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5kA 630A**



**Withdrawable**

■ K type unit, phase distance 265mm

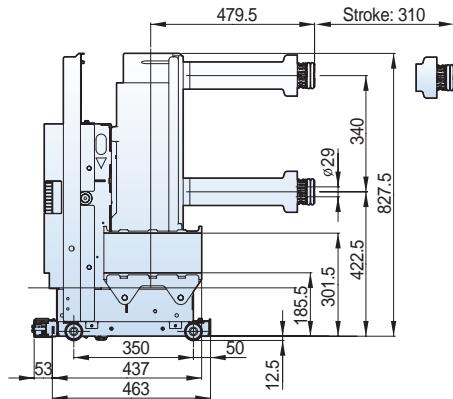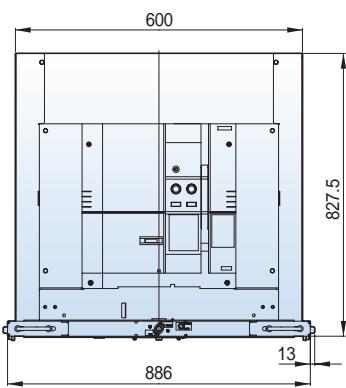
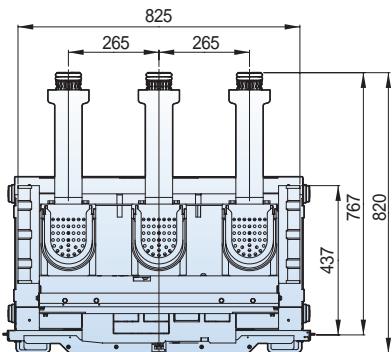





**Withdrawable**

■ H type unit, phase distance 210mm




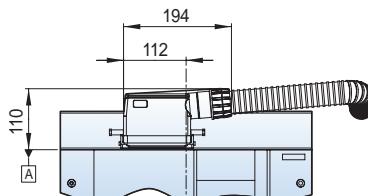
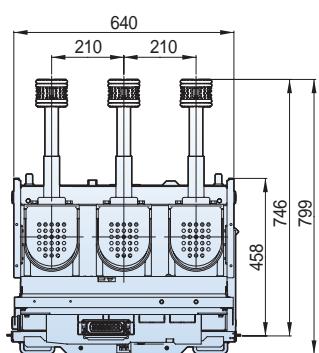


Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

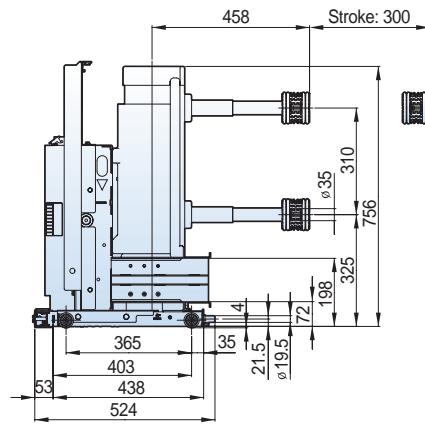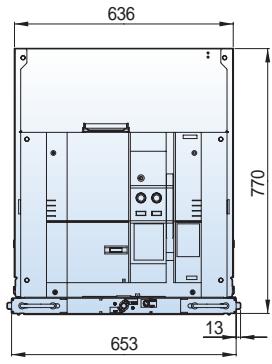

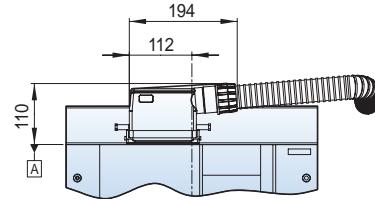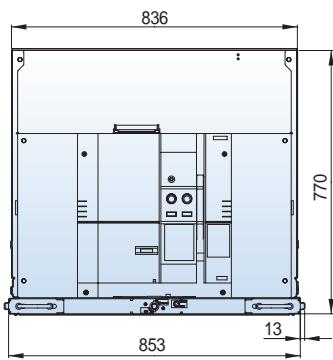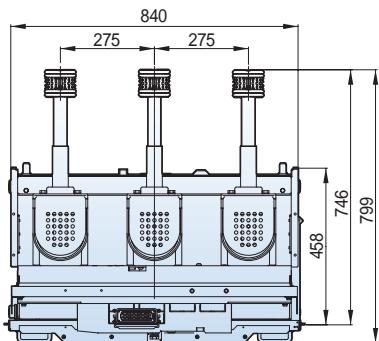**24/25.8kV 12.5kA 630A****Withdrawable****■ H type unit, phase distance 275mm**

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

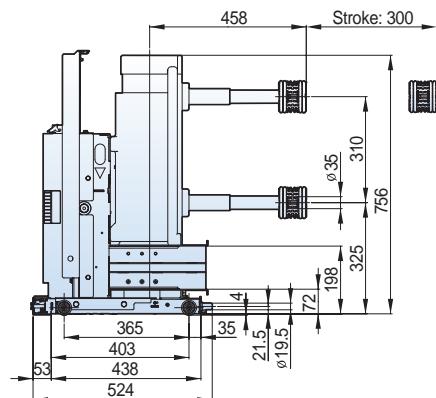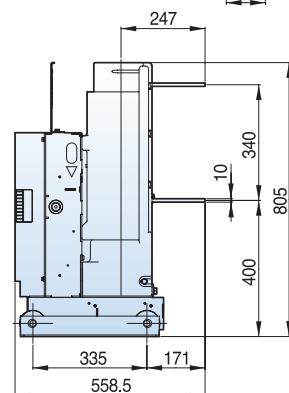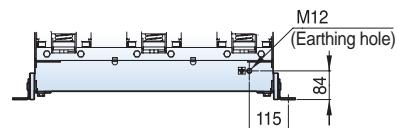
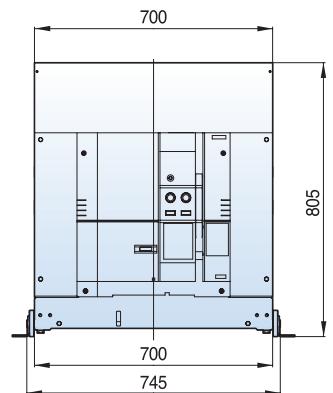
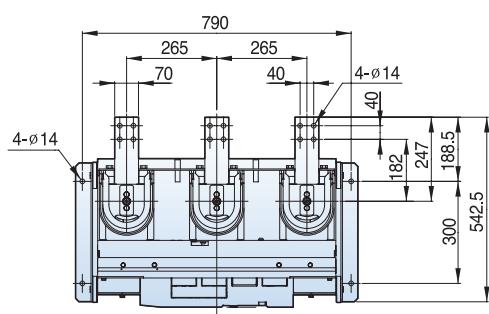
**24/25.8kV 12.5kA 1250A****Fixed****■ P type, phase distance 265mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5kA 1250A**




**Withdrawable**



■ E type unit Visible, Clip contact, phase distance 265mm

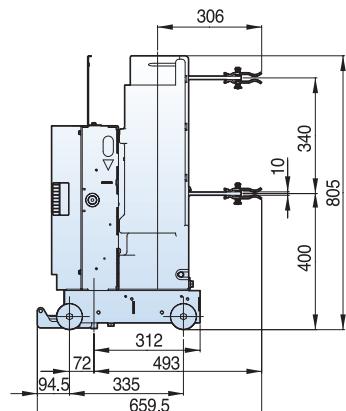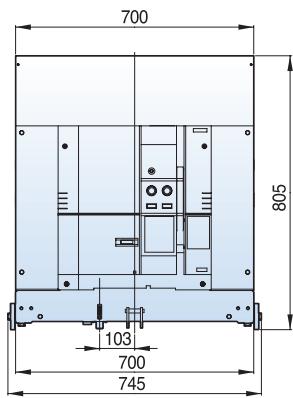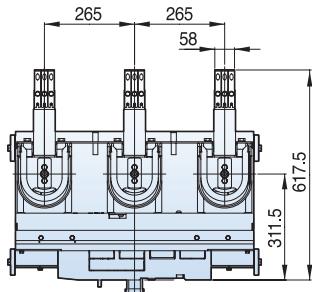

**Withdrawable**

■ F type unit Visible, Clip contact, phase distance 265mm

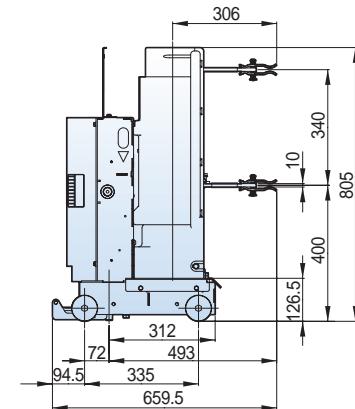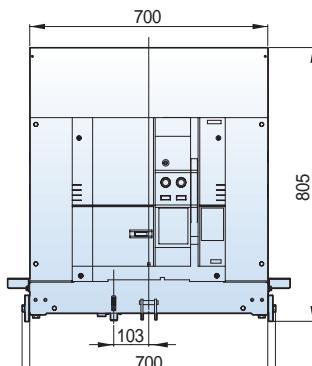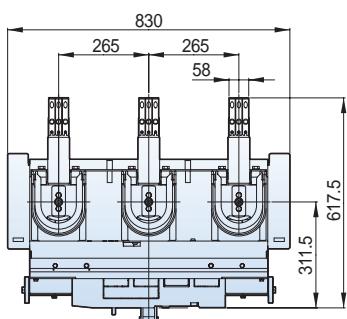

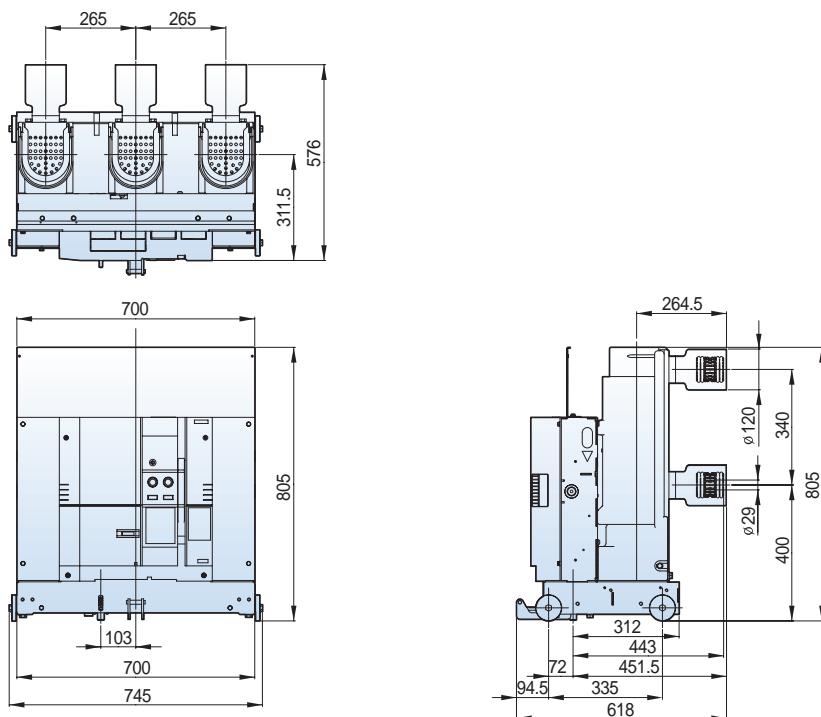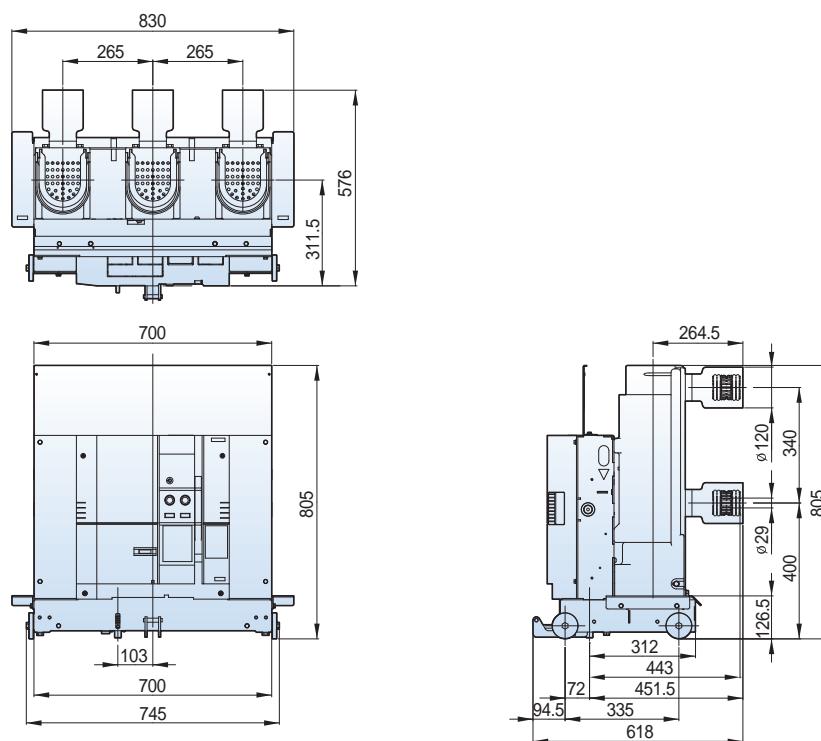
**24/25.8kV 12.5kA 1250A****Withdrawable****E type unit Enclosed, Tulip contact, phase distance 265mm****Withdrawable****F type unit Enclosed, Tulip contact, phase distance 265mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 12.5kA 1250A

Withdrawable


■ G type unit Tulip contact, phase distance 265mm






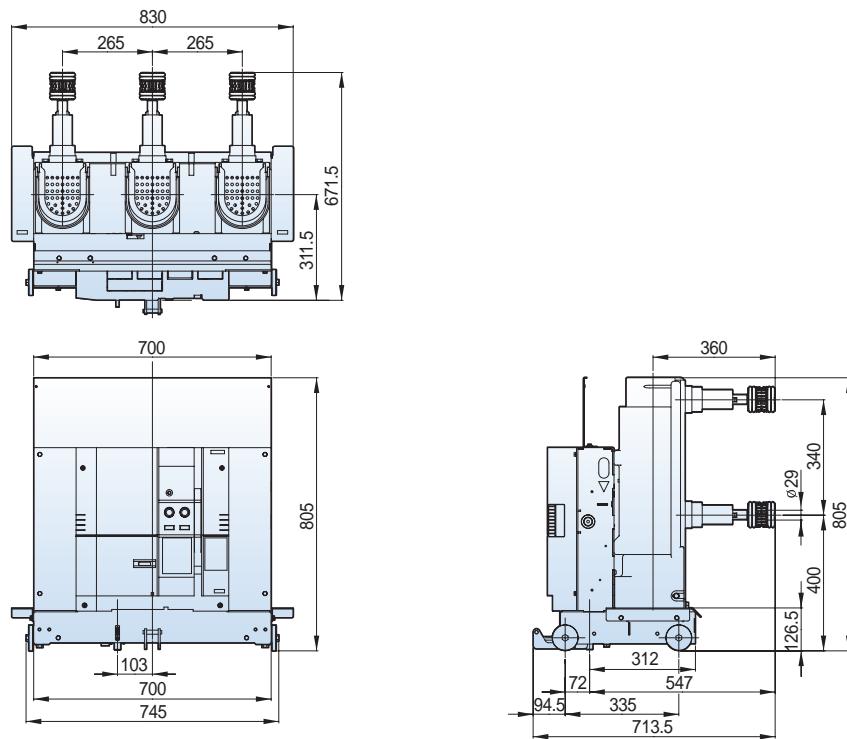


## 24/25.8kV 12.5kA 1250A & 16/25kA 630/1250A

Withdrawable

■ G type unit, phase distance 210mm

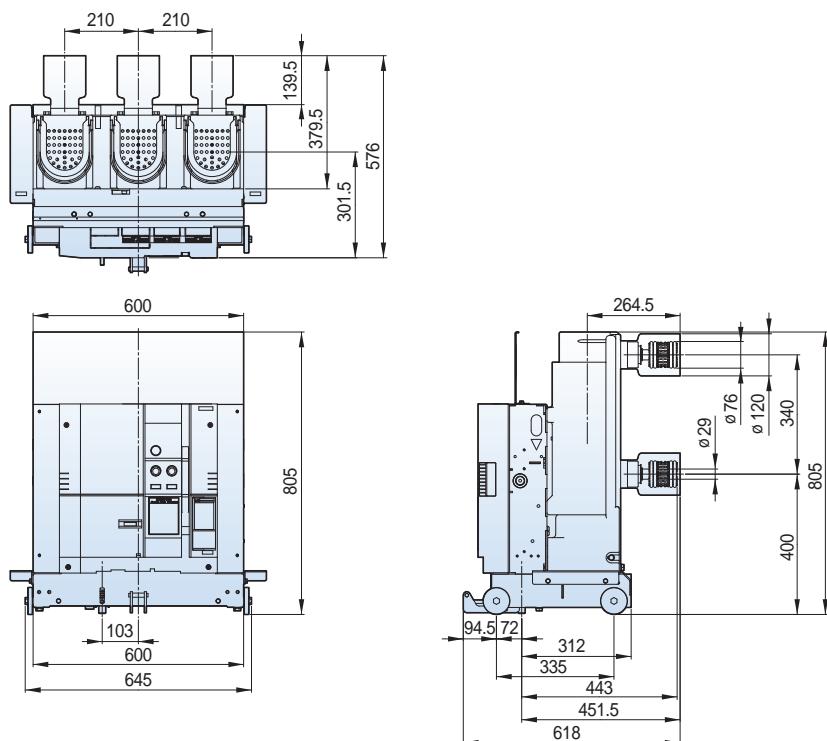

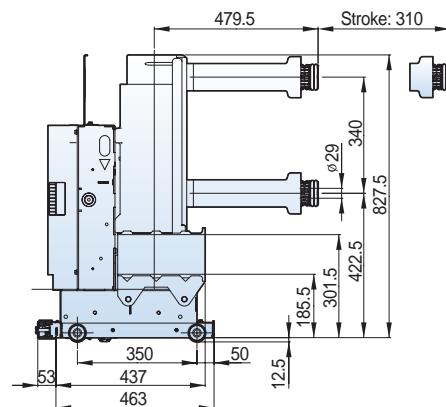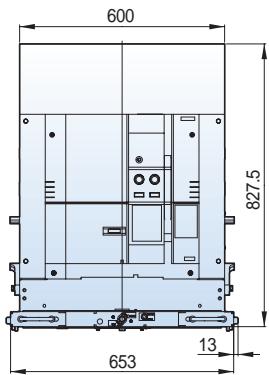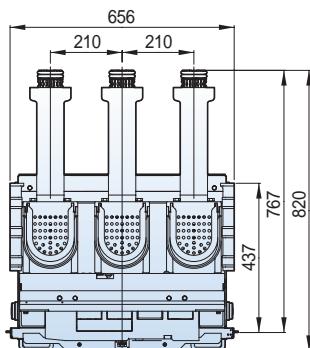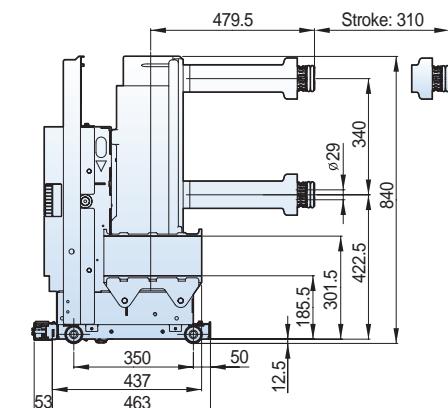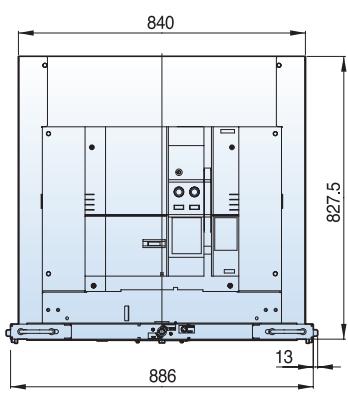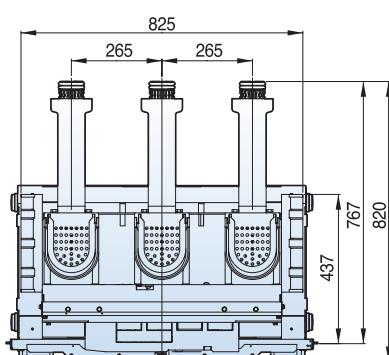
**24/25.8kV 12.5kA 1250A****Withdrawable****■ K type unit, phase distance 210mm****Withdrawable****■ K type unit, phase distance 265mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5kA 1250A**


## Withdrawable

### ■ H type unit, phase distance 210mm

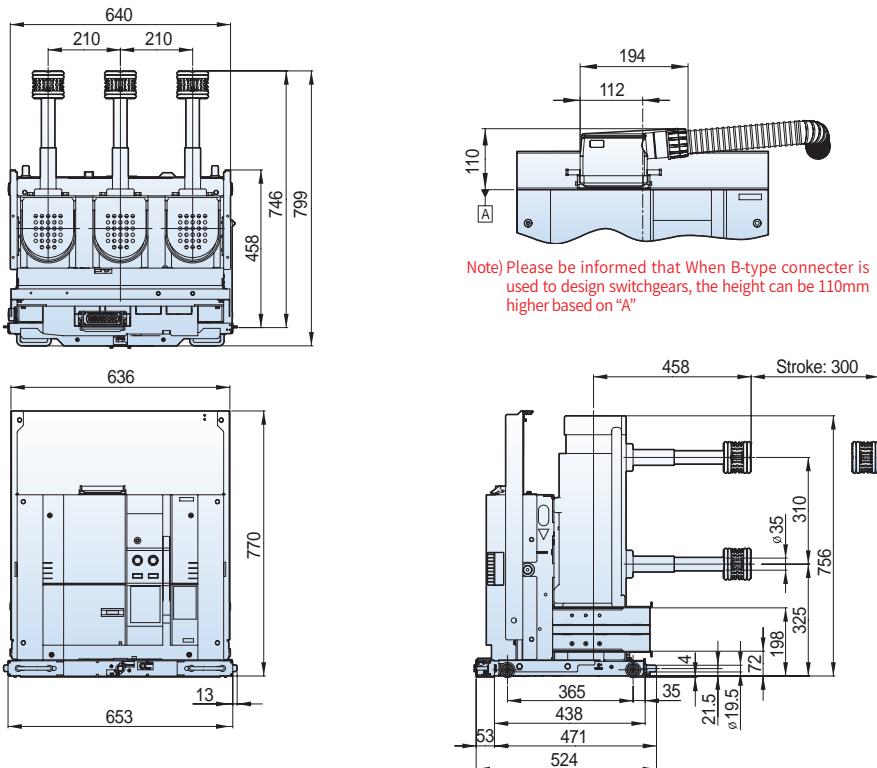

## Withdrawable


### ■ H type unit, phase distance 275mm

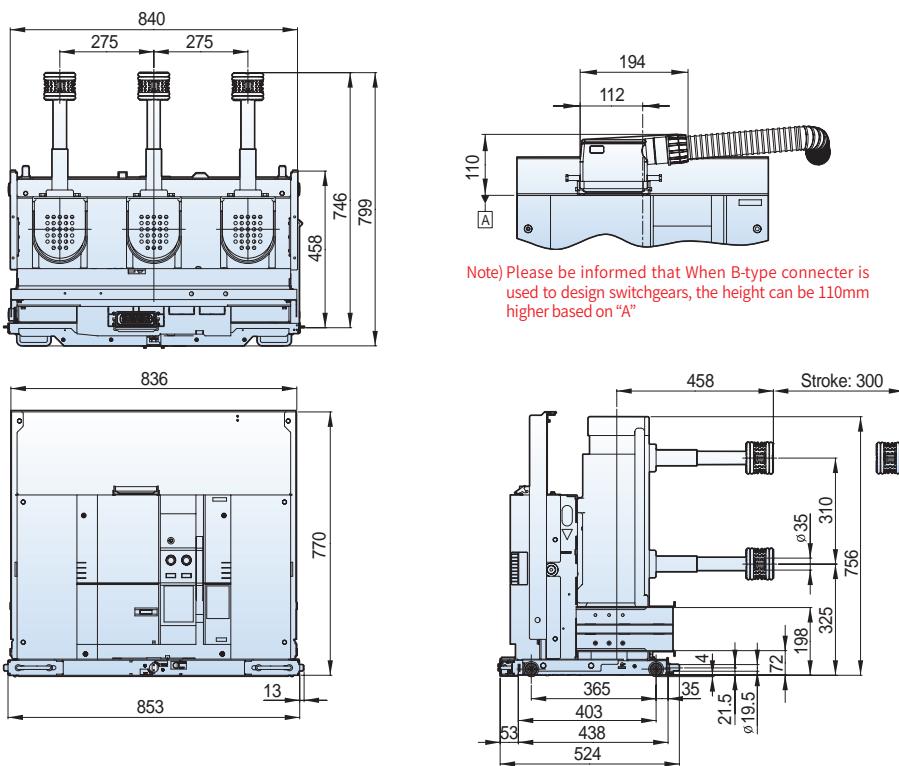

## 24/25.8kV 16/25kA 630A

**Fixed**


■ P type, phase distance 265mm

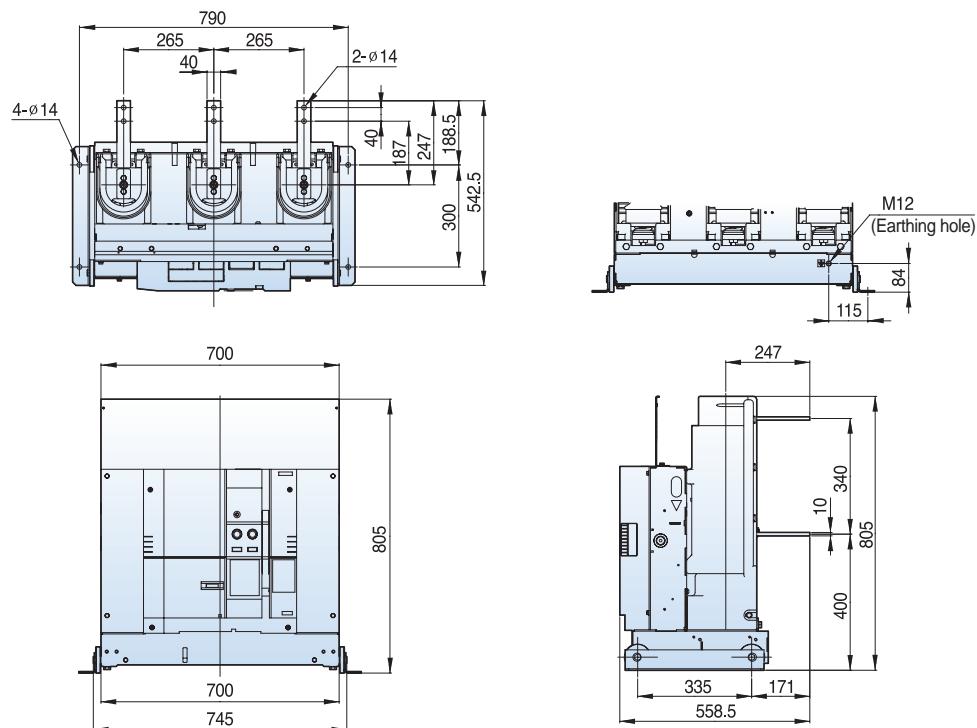

## 24/25.8kV 16kA 630A

**Withdrawable**

■ E type unit Visible, Clip contact, phase distance 265mm

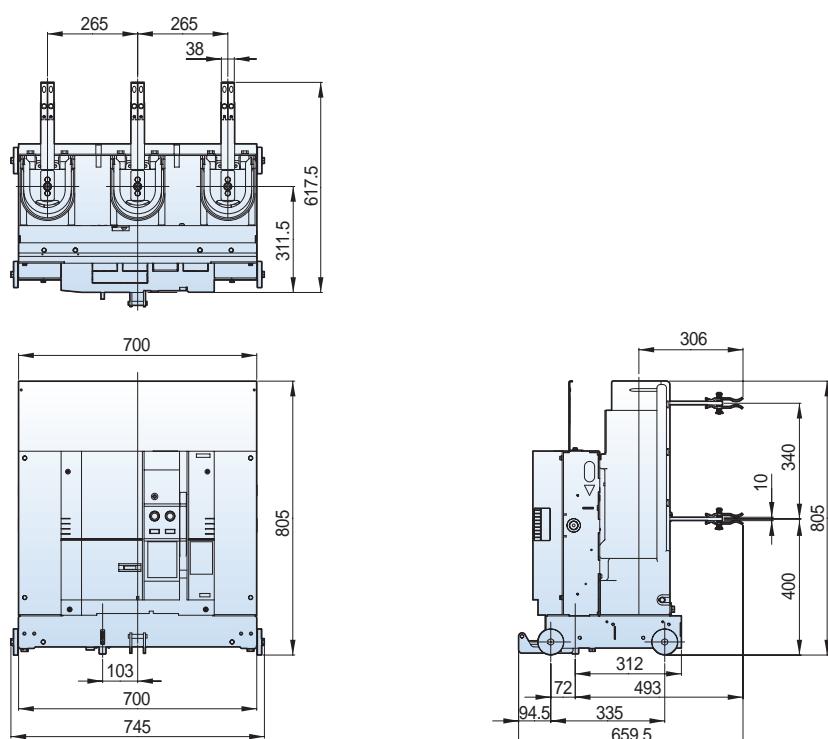


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 16kA 630A

**Withdrawable**


■ F type unit Visible, Clip contact, phase distance 265mm

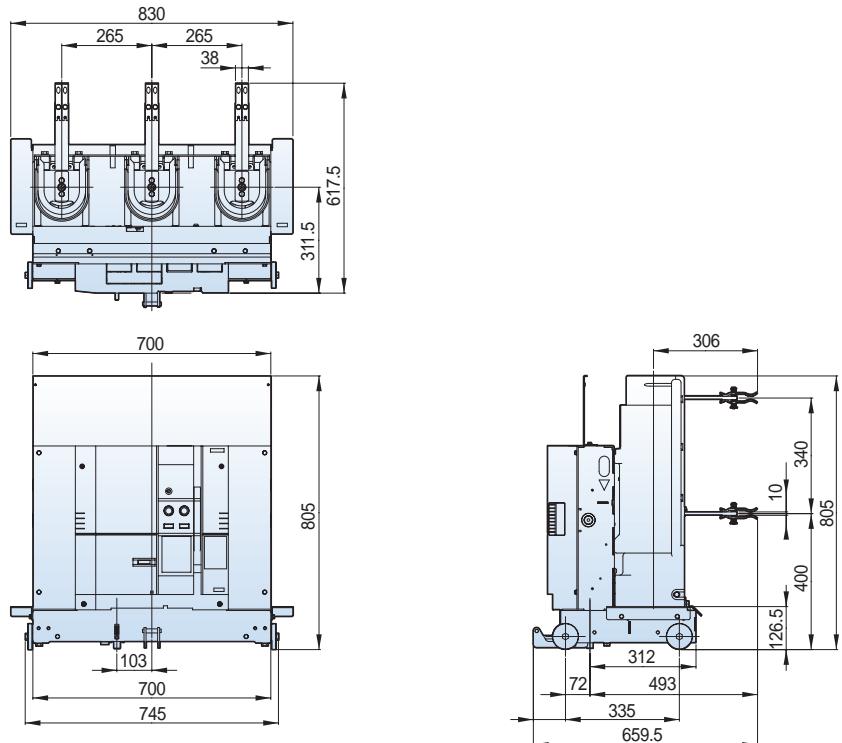

## 24/25.8kV 16/25kA 1250A

**Fixed**


■ P type, phase distance 265mm

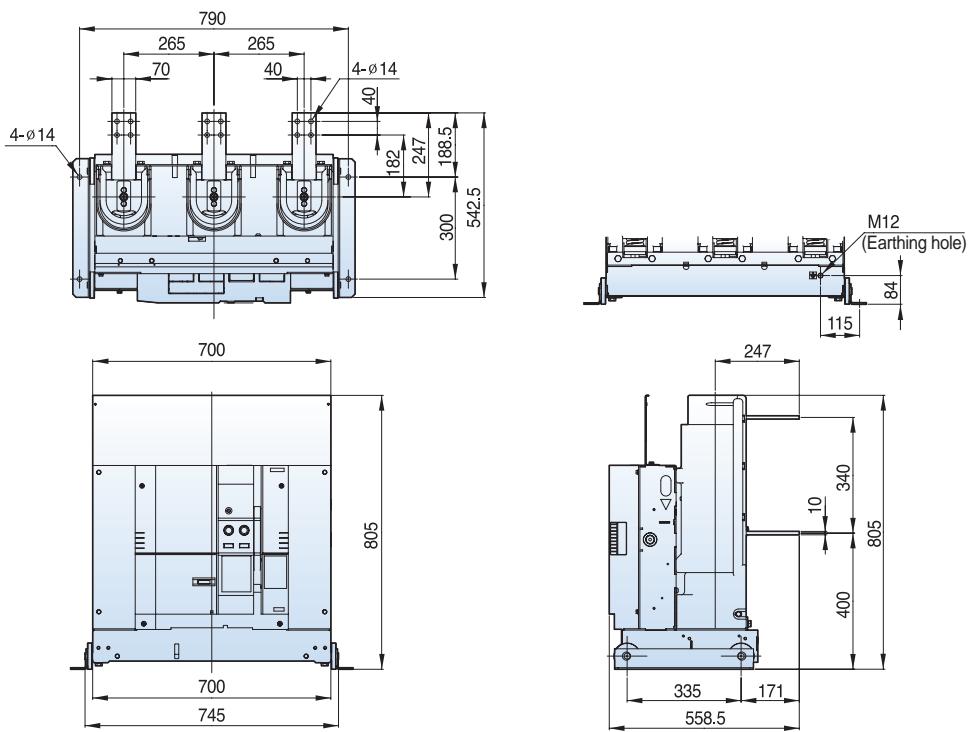

## 24/25.8kV 25kA 630A & 24/25.8kV 16/25kA 1250A


**Withdrawable**

■ E type unit Visible, Clip contact, phase distance 265mm

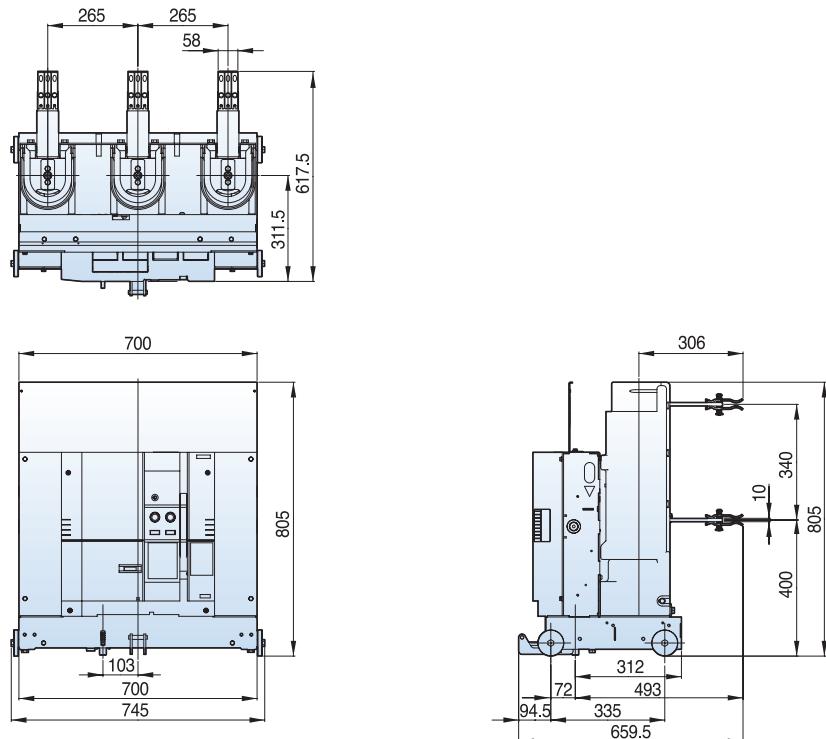

**Withdrawable**

■ F type unit Visible, Clip contact, phase distance 265mm

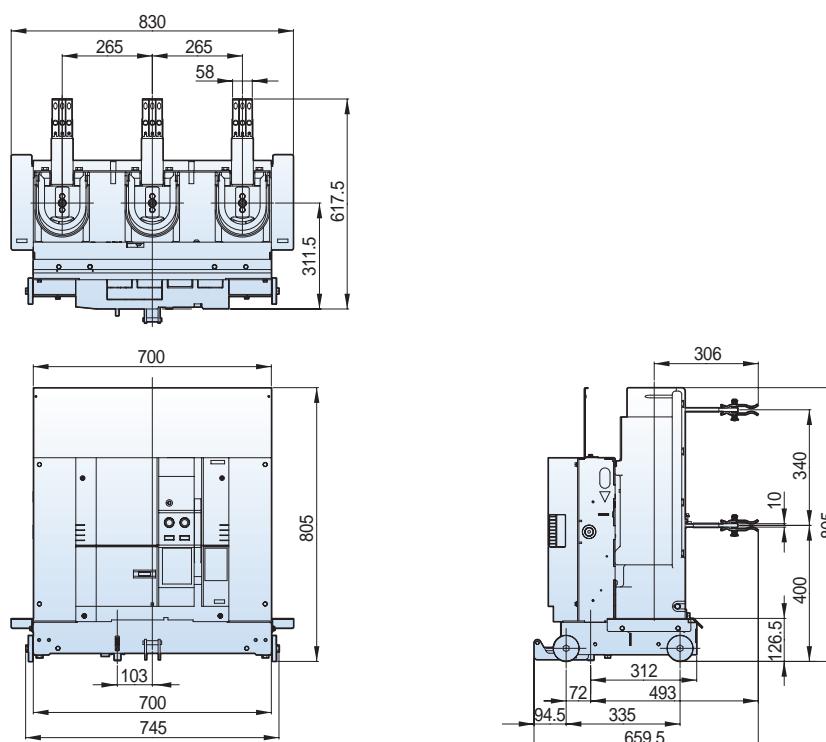


# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 16/25kA 630/1250A**


**Withdrawable**



■ E type unit Enclosed, Tulip contact, phase distance 265mm

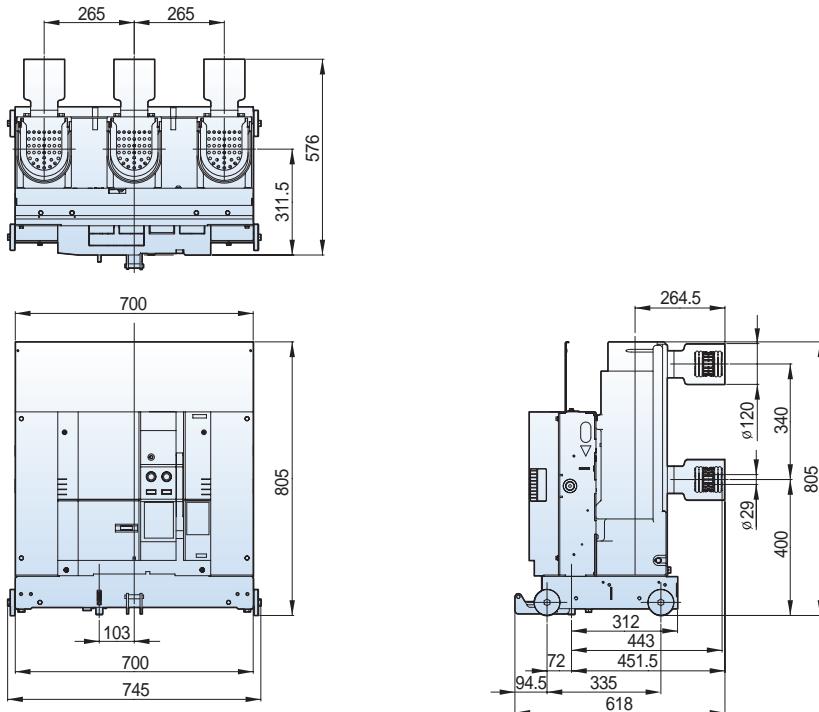

**Withdrawable**

■ F type unit Enclosed, Tulip contact, phase distance 265mm

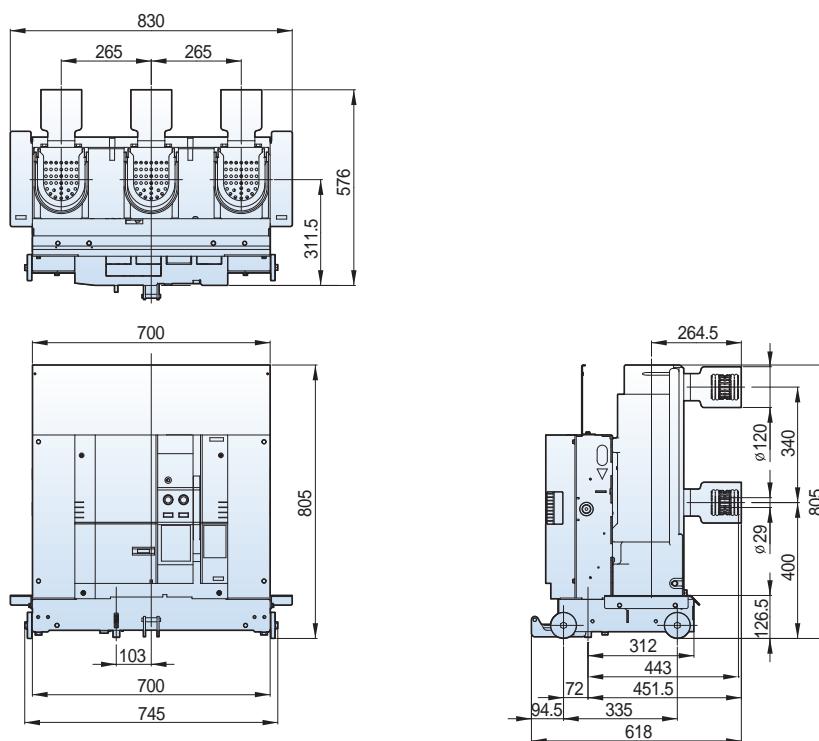


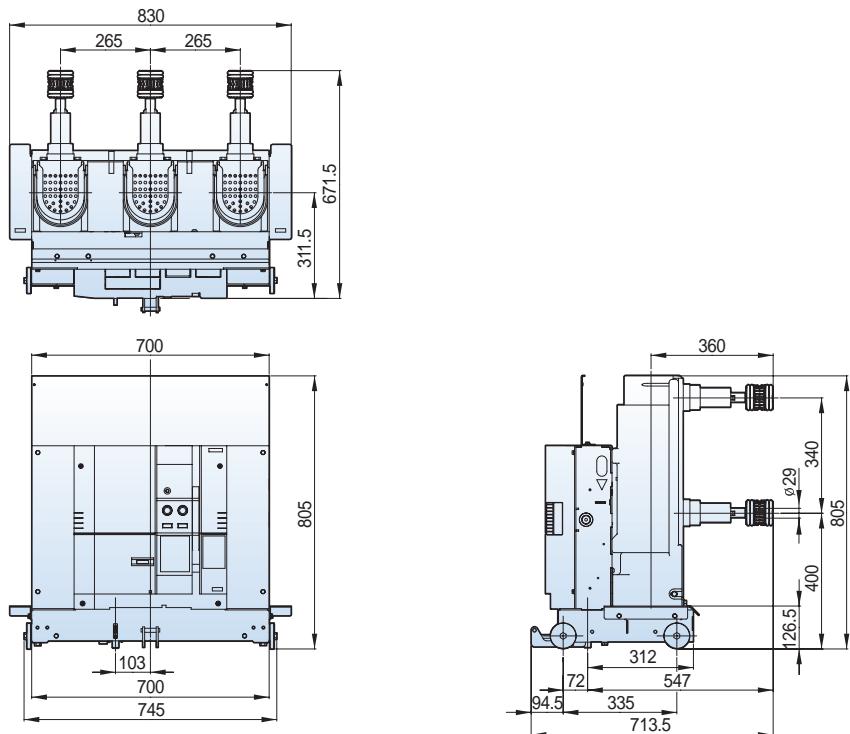
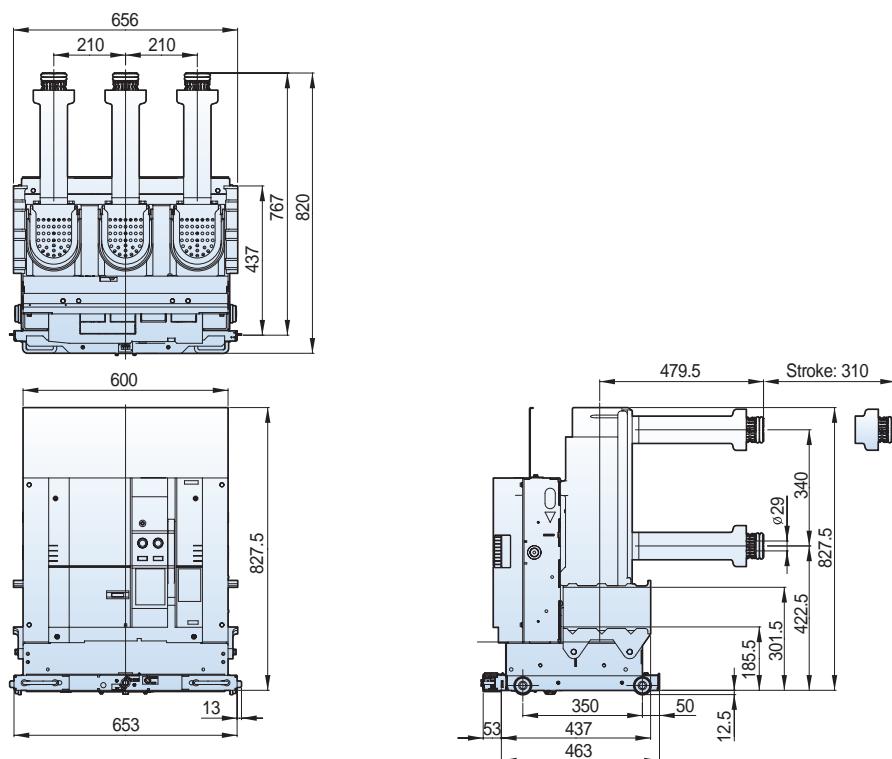
**24/25.8kV 16/25kA 630/1250A****Withdrawable****■ G type unit Tulip contact, phase distance 265mm****Withdrawable****■ K type unit, phase distance 210mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 16/25kA 630/1250A**




**Withdrawable**

■ K type unit, phase distance 265mm

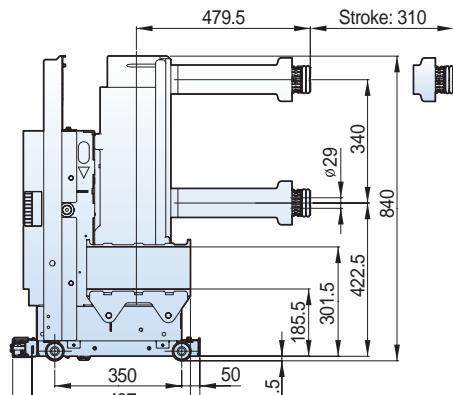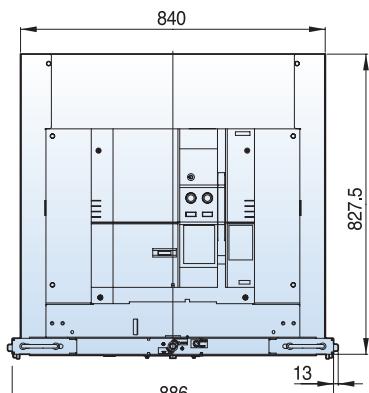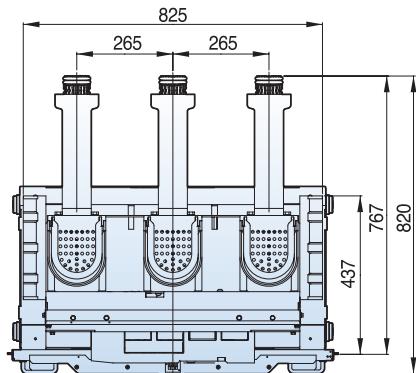


**Withdrawable**

■ H type unit, phase distance 210mm

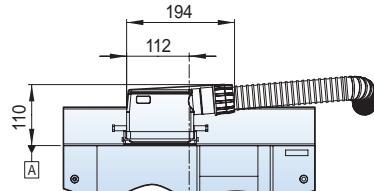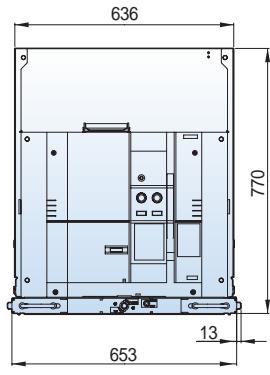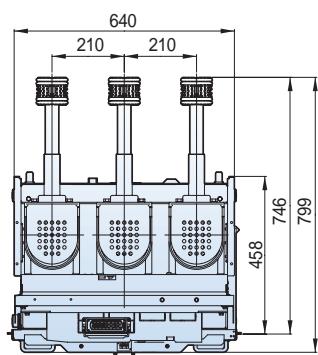





Note) Please be informed that When Q-type connector is used to design switchgears, the height can be 110mm higher based on "A"

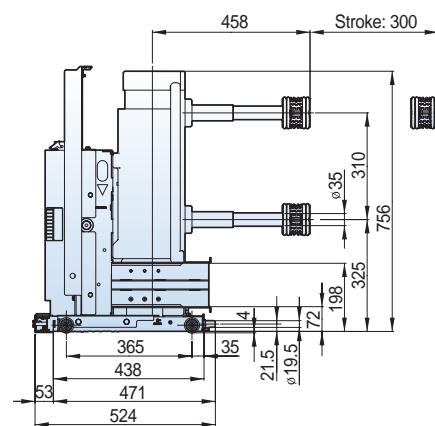

## 24/25.8kV 16/25kA 630/1250A

### Withdrawable





#### ■ H type unit, phase distance 275mm

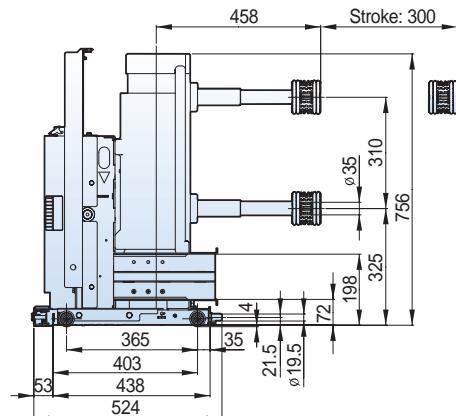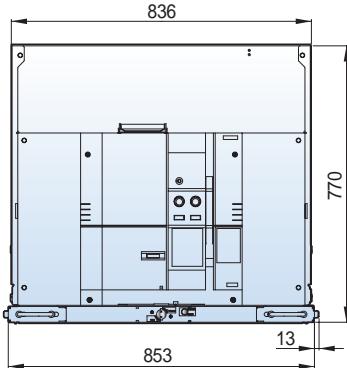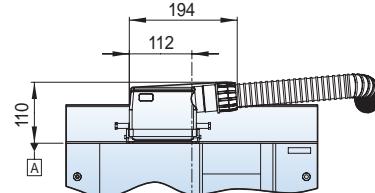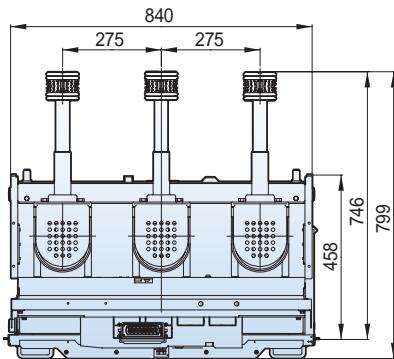

## 24/25.8kV 25kA 2000A

### Fixed

#### ■ P type, phase distance 265mm

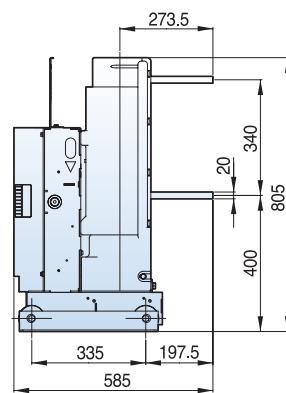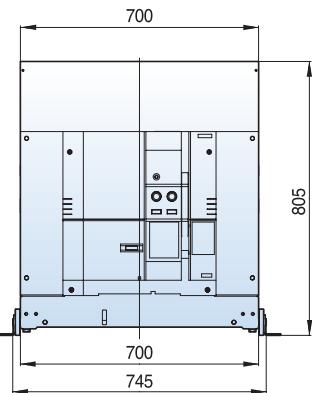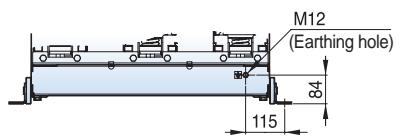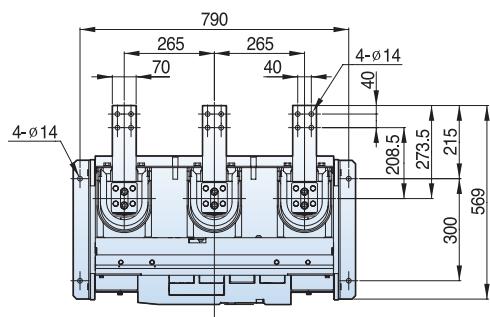


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 25kA 2000A


Withdrawable



■ E type unit Visible, Clip contact, phase distance 265mm

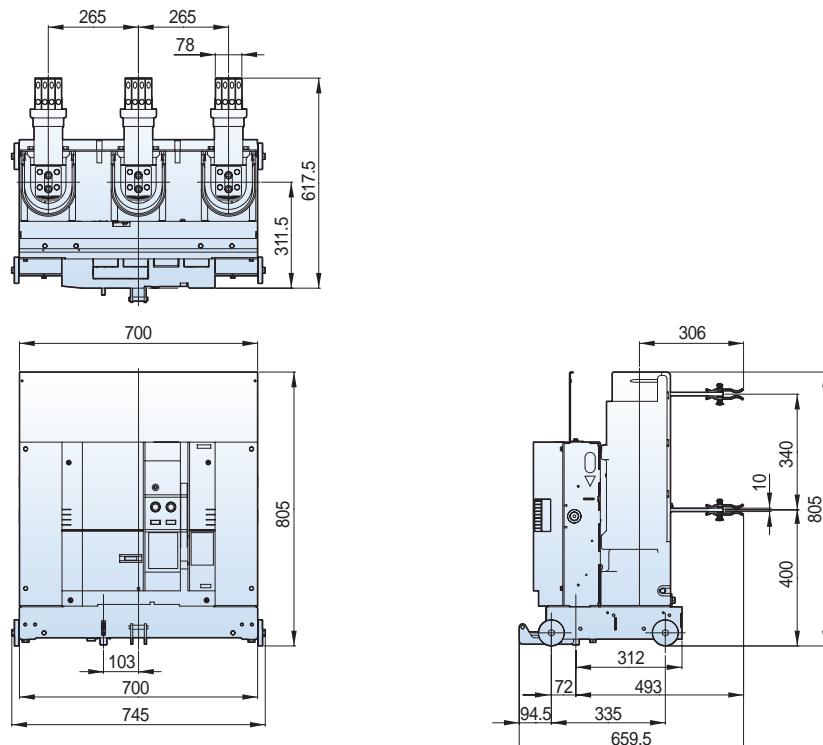

Withdrawable

■ F type unit Visible, Clip contact, phase distance 265mm

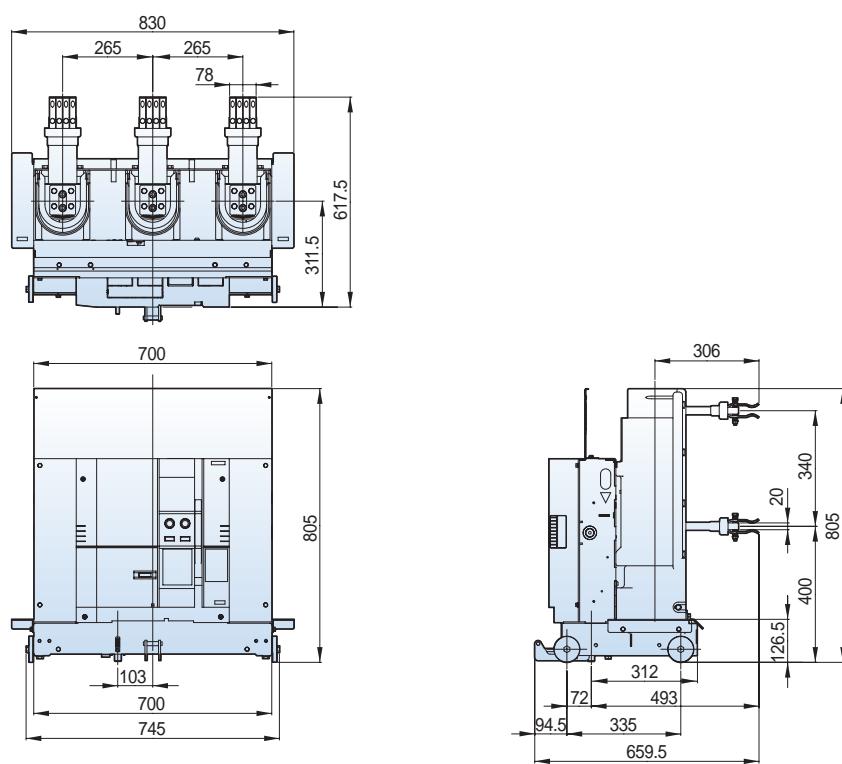


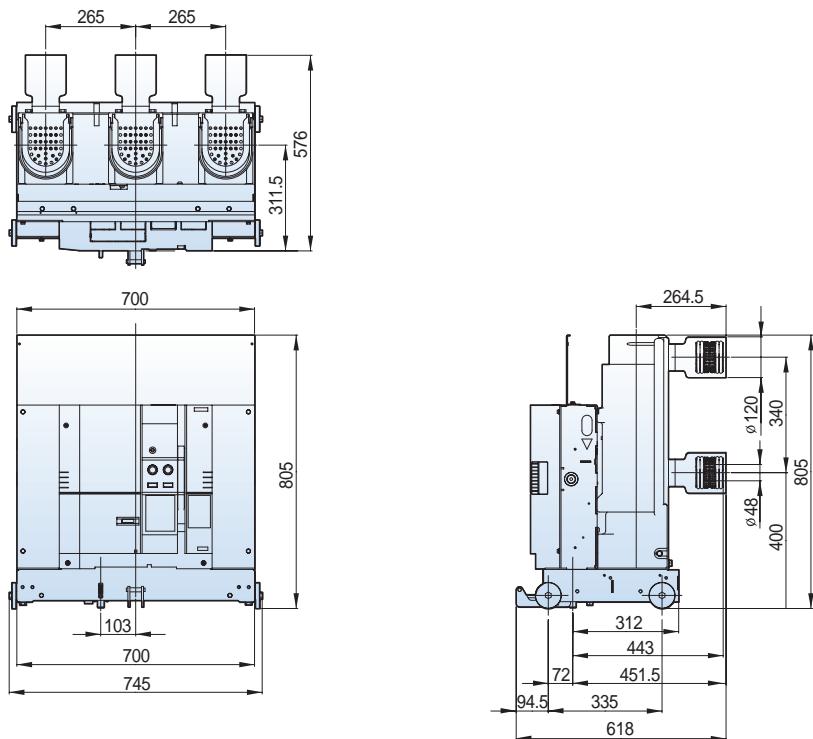
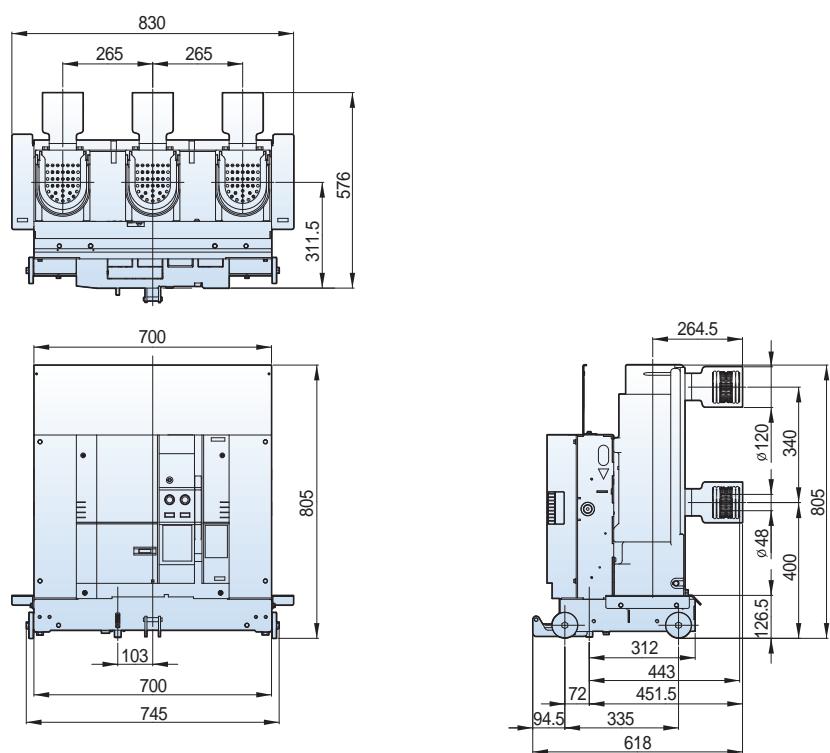
**24/25.8kV 25kA 2000A****Withdrawable****E type unit Enclosed, Tulip contact, phase distance 265mm****Withdrawable****F type unit Enclosed, Tulip contact, phase distance 265mm**

# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 25kA 2000A




**Withdrawable**

■ G type unit, phase distance 210mm

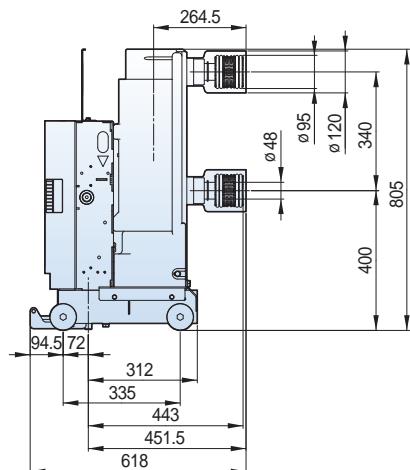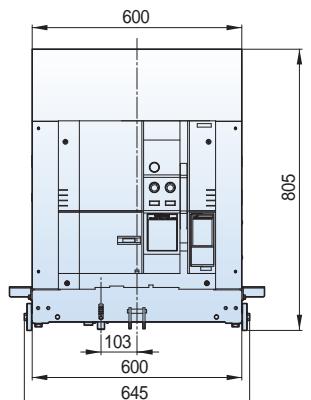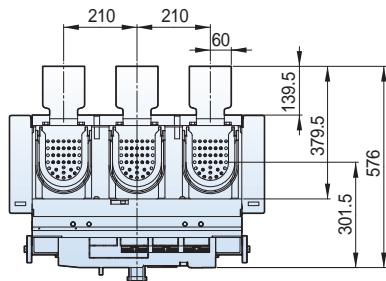

**Withdrawable**




■ K type unit, phase distance 265mm

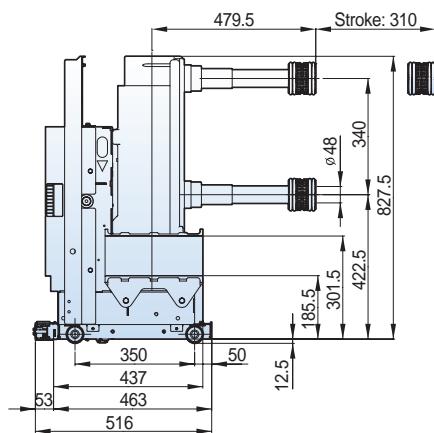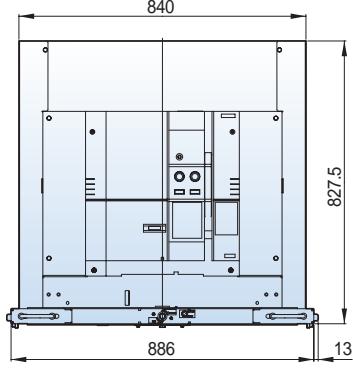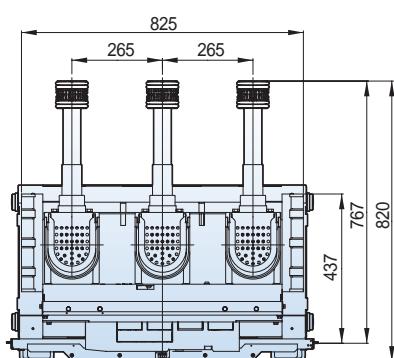


## 24/25.8kV 25kA 2000A

### Withdrawable

#### ■ H type unit, phase distance 210mm

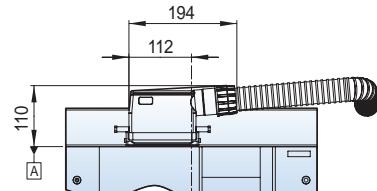
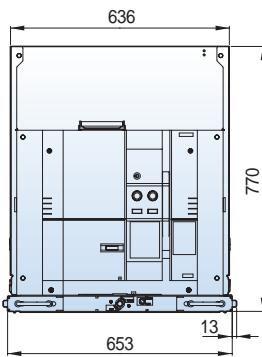
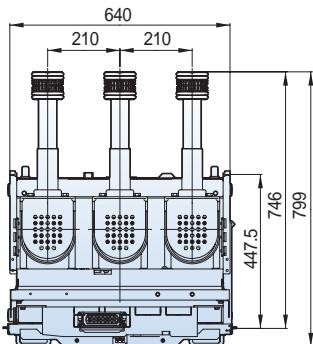


Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

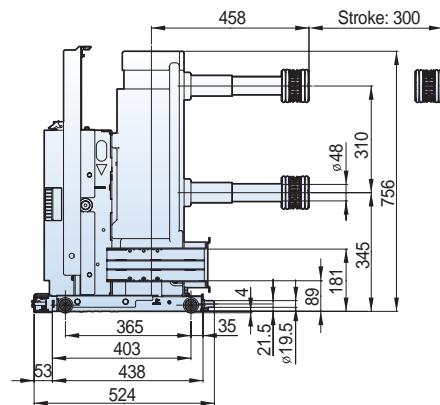


### Withdrawable

#### ■ H type unit, phase distance 275mm

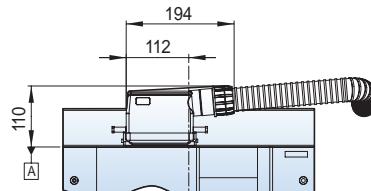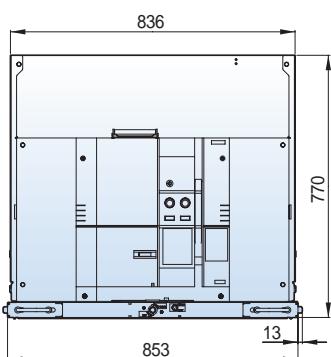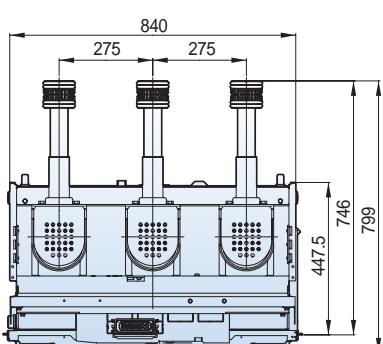

Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"


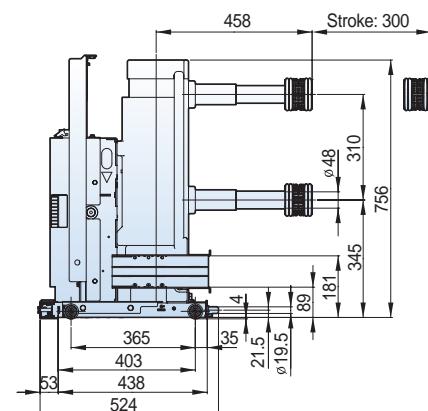


# Dimensions - VL type (VL-06/12/17/20/25/36)



## 24/25.8kV 25kA 2500A

### Withdrawable

#### ■ H type unit, phase distance 275mm

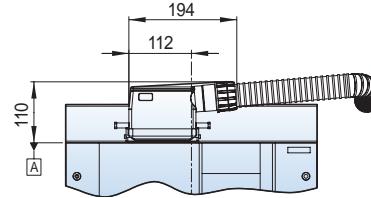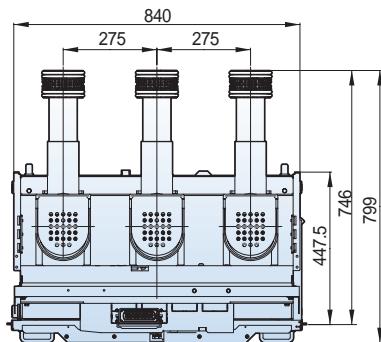



Note) Please be informed that When B-type connector is used to design switchgears, the height can be 110mm higher based on "A"

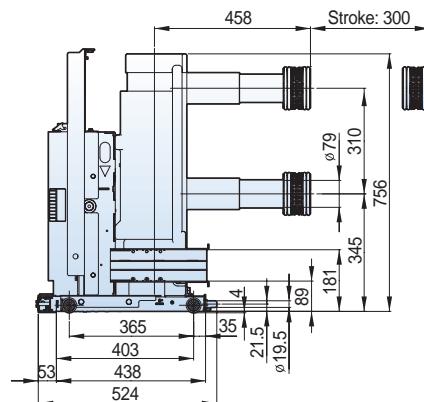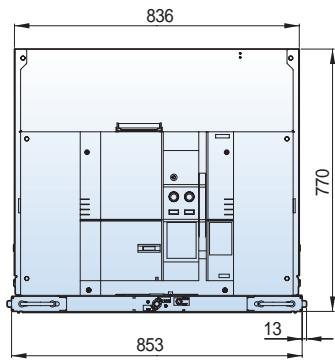



## 24/25.8kV 12.5/16/25kA 630/1250/2000A

### Withdrawable

#### ■ E type cradle Visible, Clip contact, phase distance 265mm

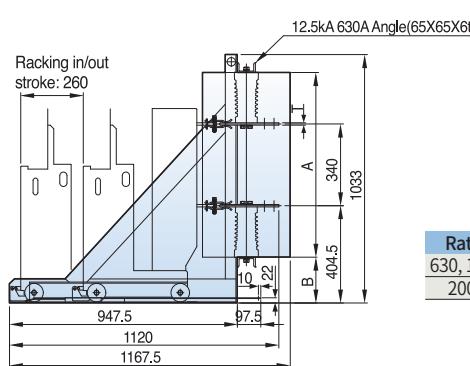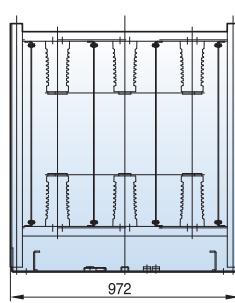


Rating	A	B	T
630, 1250A	768	190.5	10
2000A	778	185.5	20

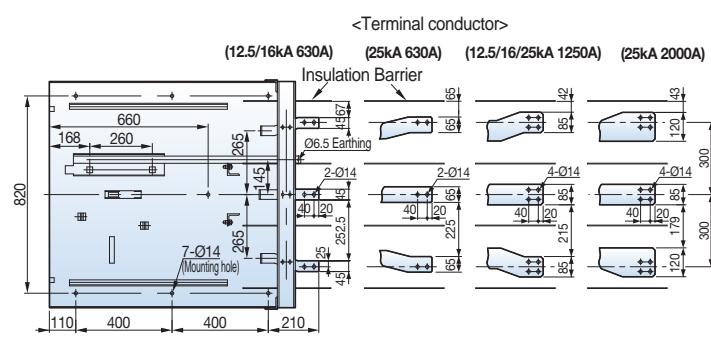

## 24/25.8kV 12.5/16/25kA 630/1250/2000A

### Withdrawable


#### ■ F type cradle Visible, Clip contact, phase distance 265mm

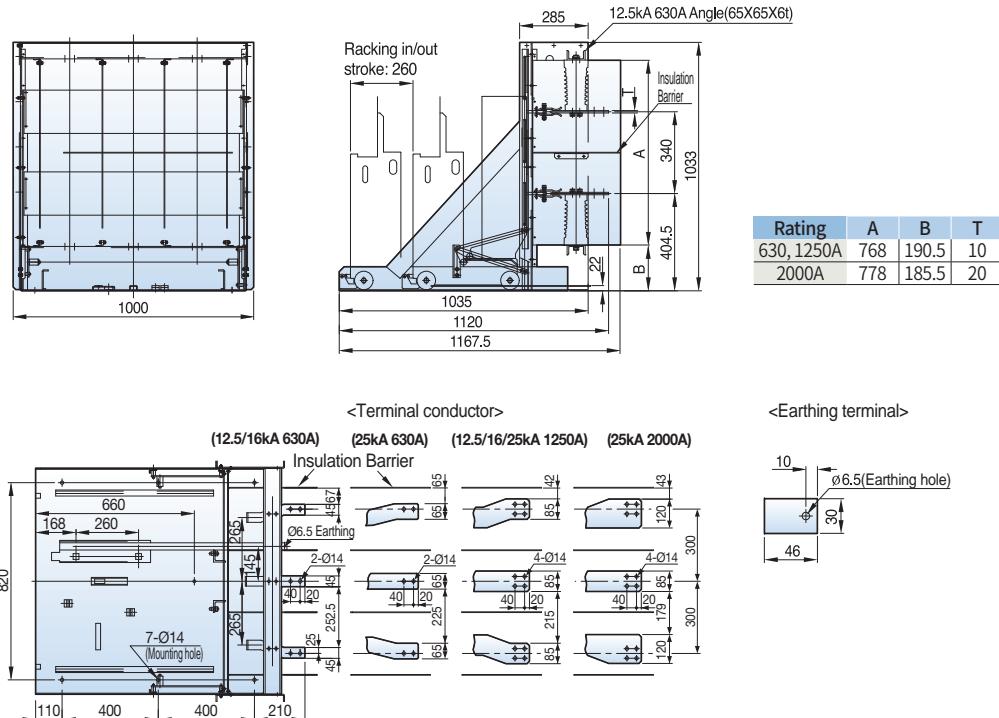

## 24/25.8kV 12.5/16/25kA 630/1250/2000A

### Withdrawable

#### ■ E type cradle Enclosed, Tulip contact, phase distance 265mm

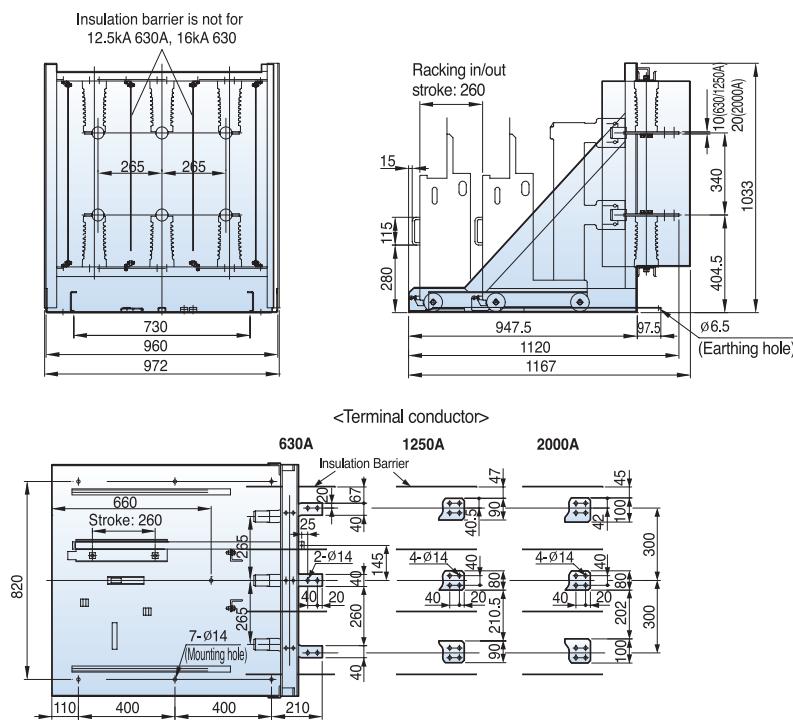


# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5/16/25kA 630/1250/2000A**

## Withdrawable


### ■ F type cradle Enclosed, Tulip contact, phase distance 265mm

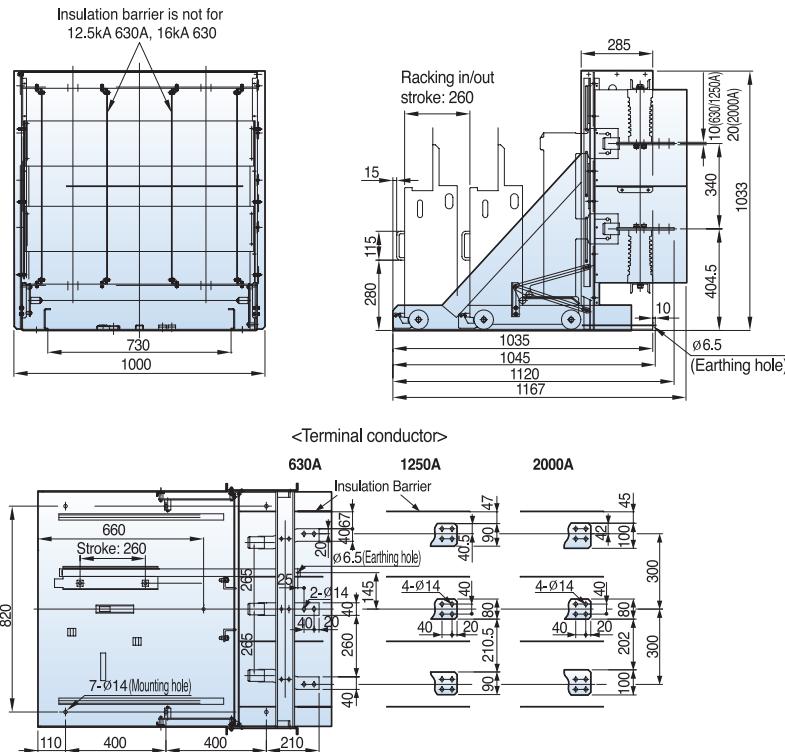

**24/25.8kV 12.5/16/25kA 630/1250A**

## Withdrawable


### ■ G type cradle Tulip contact, phase distance 265mm

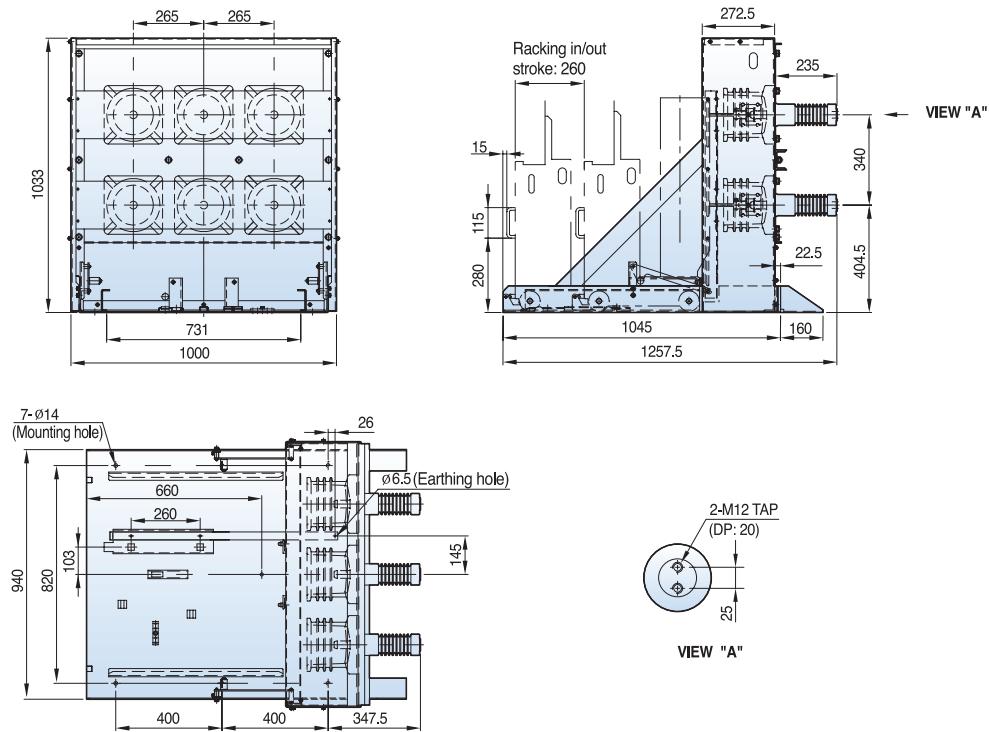

## 24/25.8kV 12.5/16/25kA 630A

**Withdrawable**


■ G type cradle, Tulip contact, phase distance 210mm

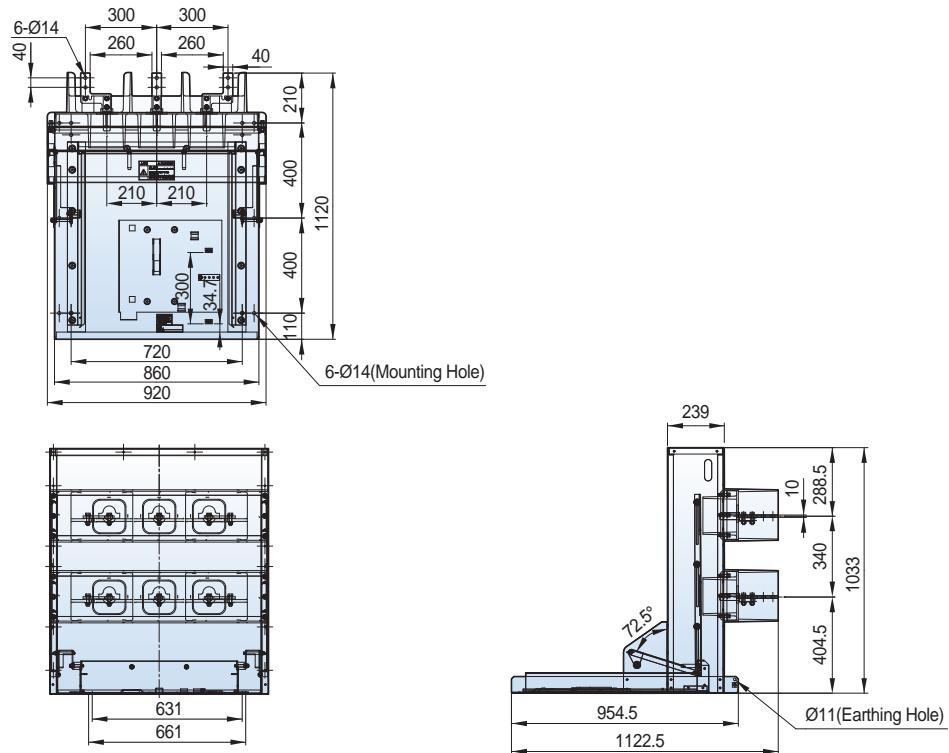

## 24/25.8kV 12.5/16/25kA 1250A

**Withdrawable**

■ G type cradle, Tulip contact, phase distance 210mm

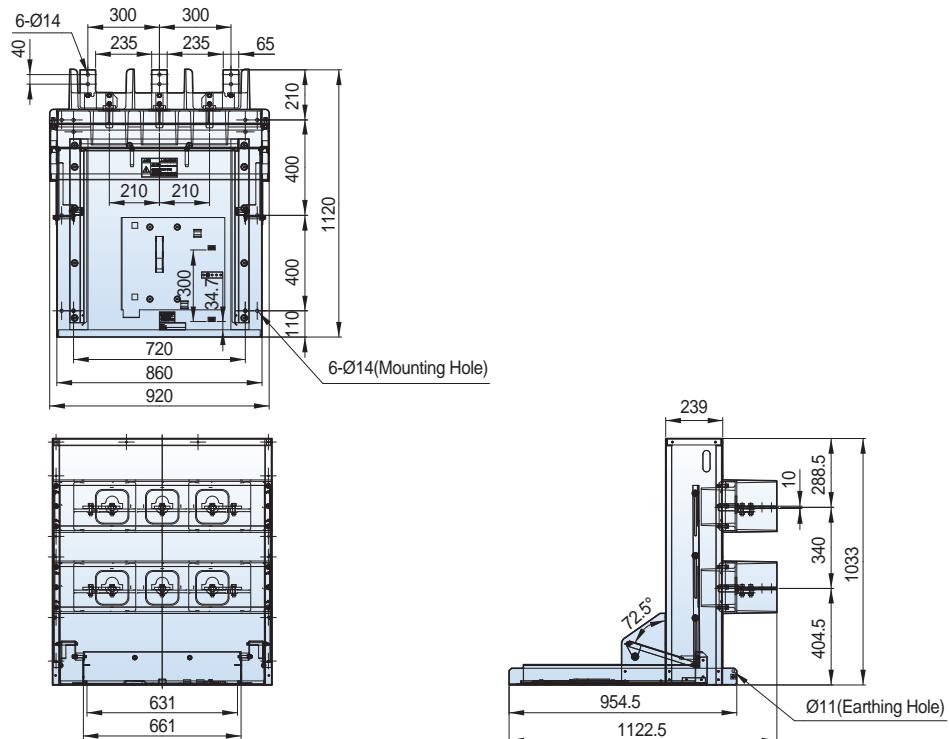


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 12.5/16/25kA 2000A

**Withdrawable**


■ G type cradle, Tulip contact, phase distance 210mm

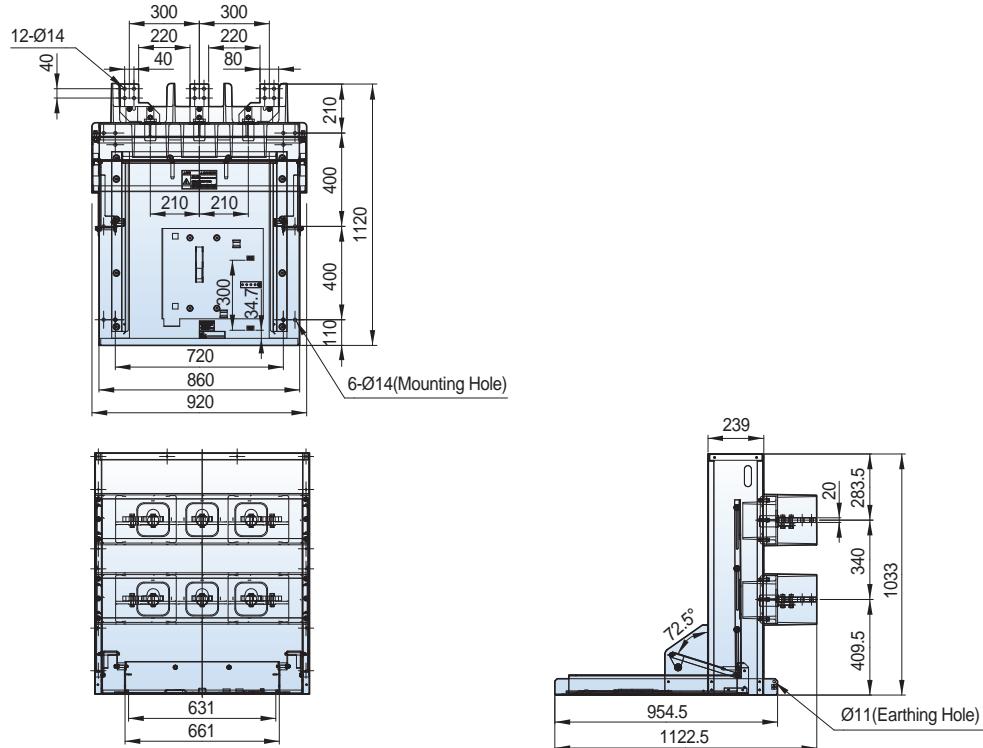

## 24/25.8kV 12.5/16/25kA 630/1250/2000A

**Withdrawable**

■ K type cradle Enclosed, Tulip contact, phase distance 210/265mm

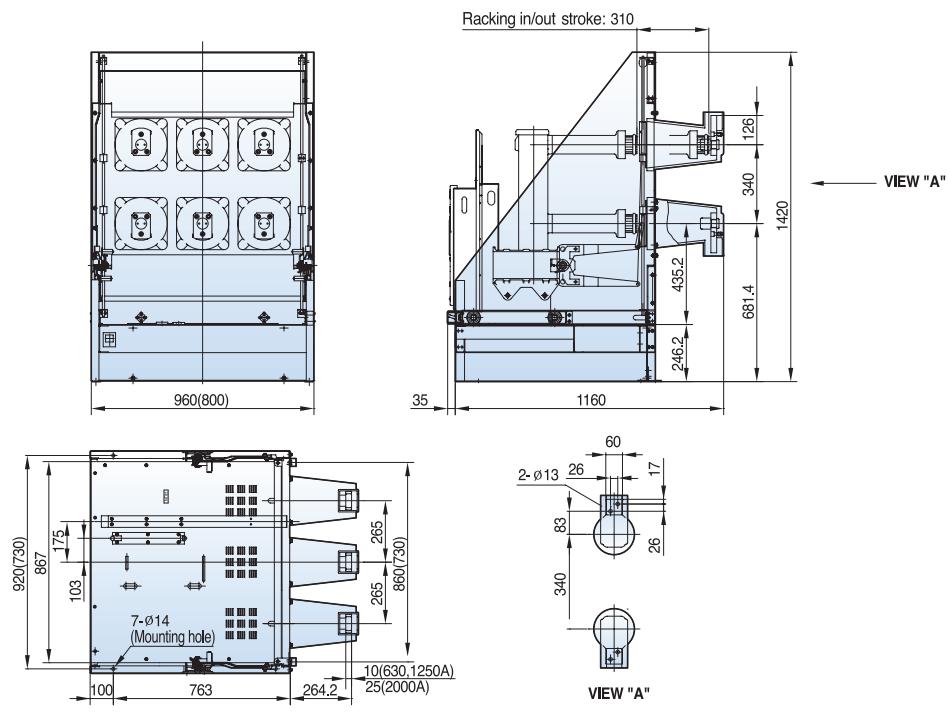


Note) In case of phase distance 210mm ( ) means dimensions and 630A, 1250A are available only  
Items : VCL-20K13B06, VCL-20K13B13, (G-type closed Tulip way, 630A, 1250A)

## 24/25.8kV 12.5/16/25kA 630/1250A

### Withdrawable

#### H type cradle, phase distance 210mm

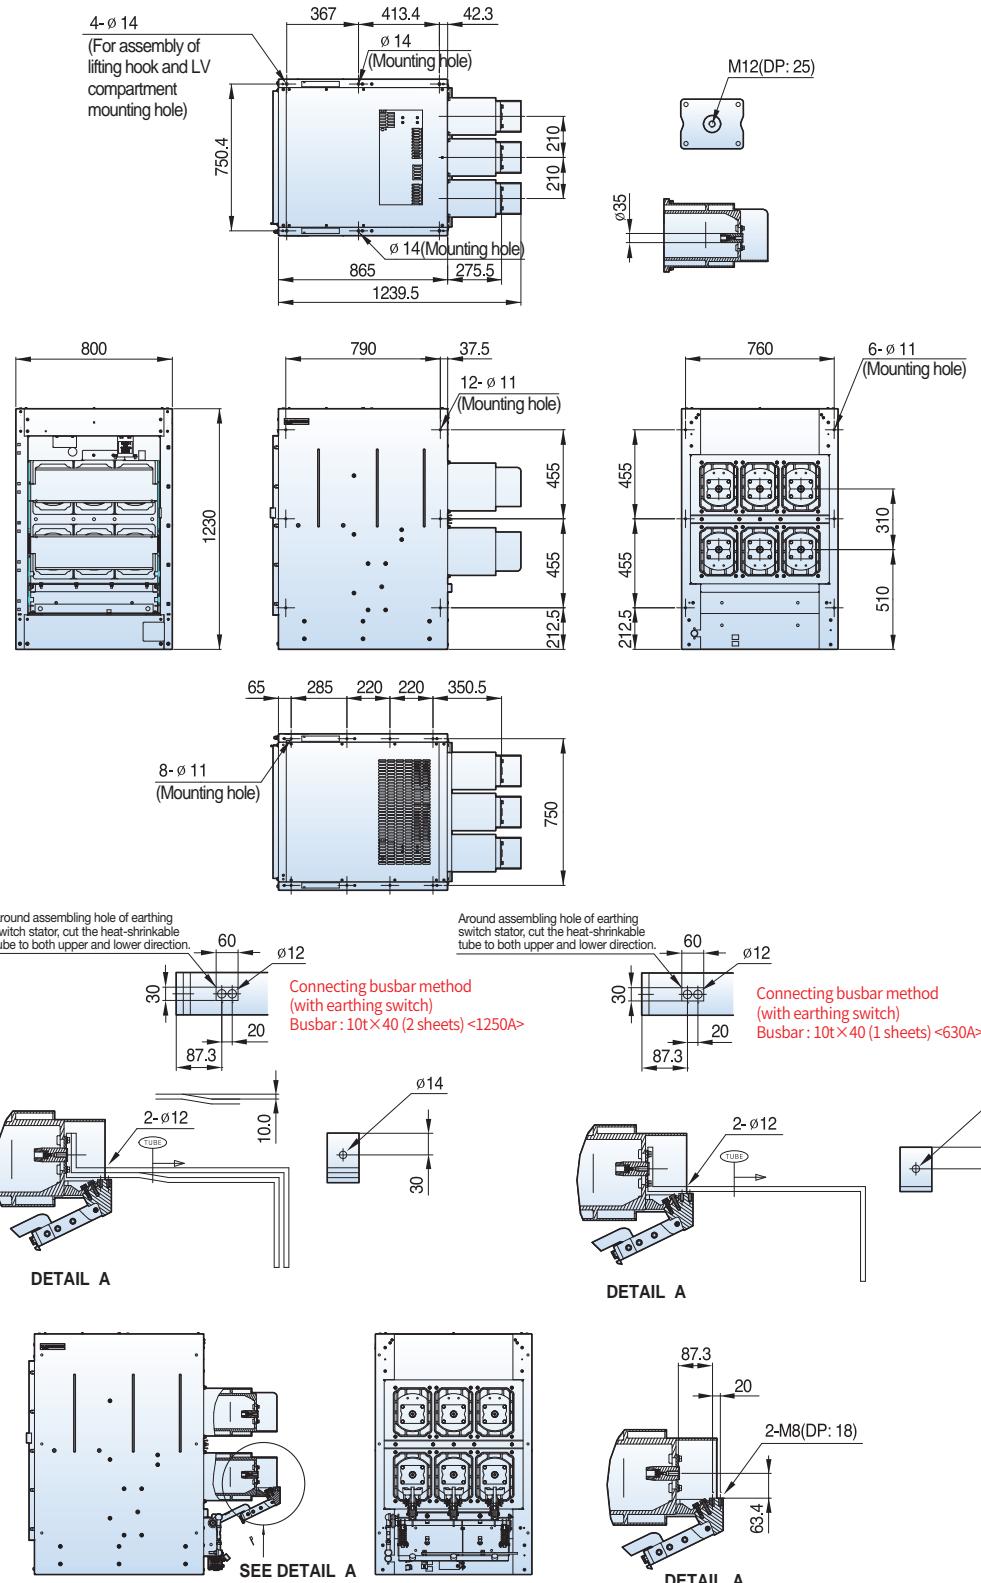


# Dimensions - VL type (VL-06/12/17/20/25/36)

**24/25.8kV 12.5/16/25kA 630/1250A**

**Withdrawable**


■ H type cradle, phase distance 275mm

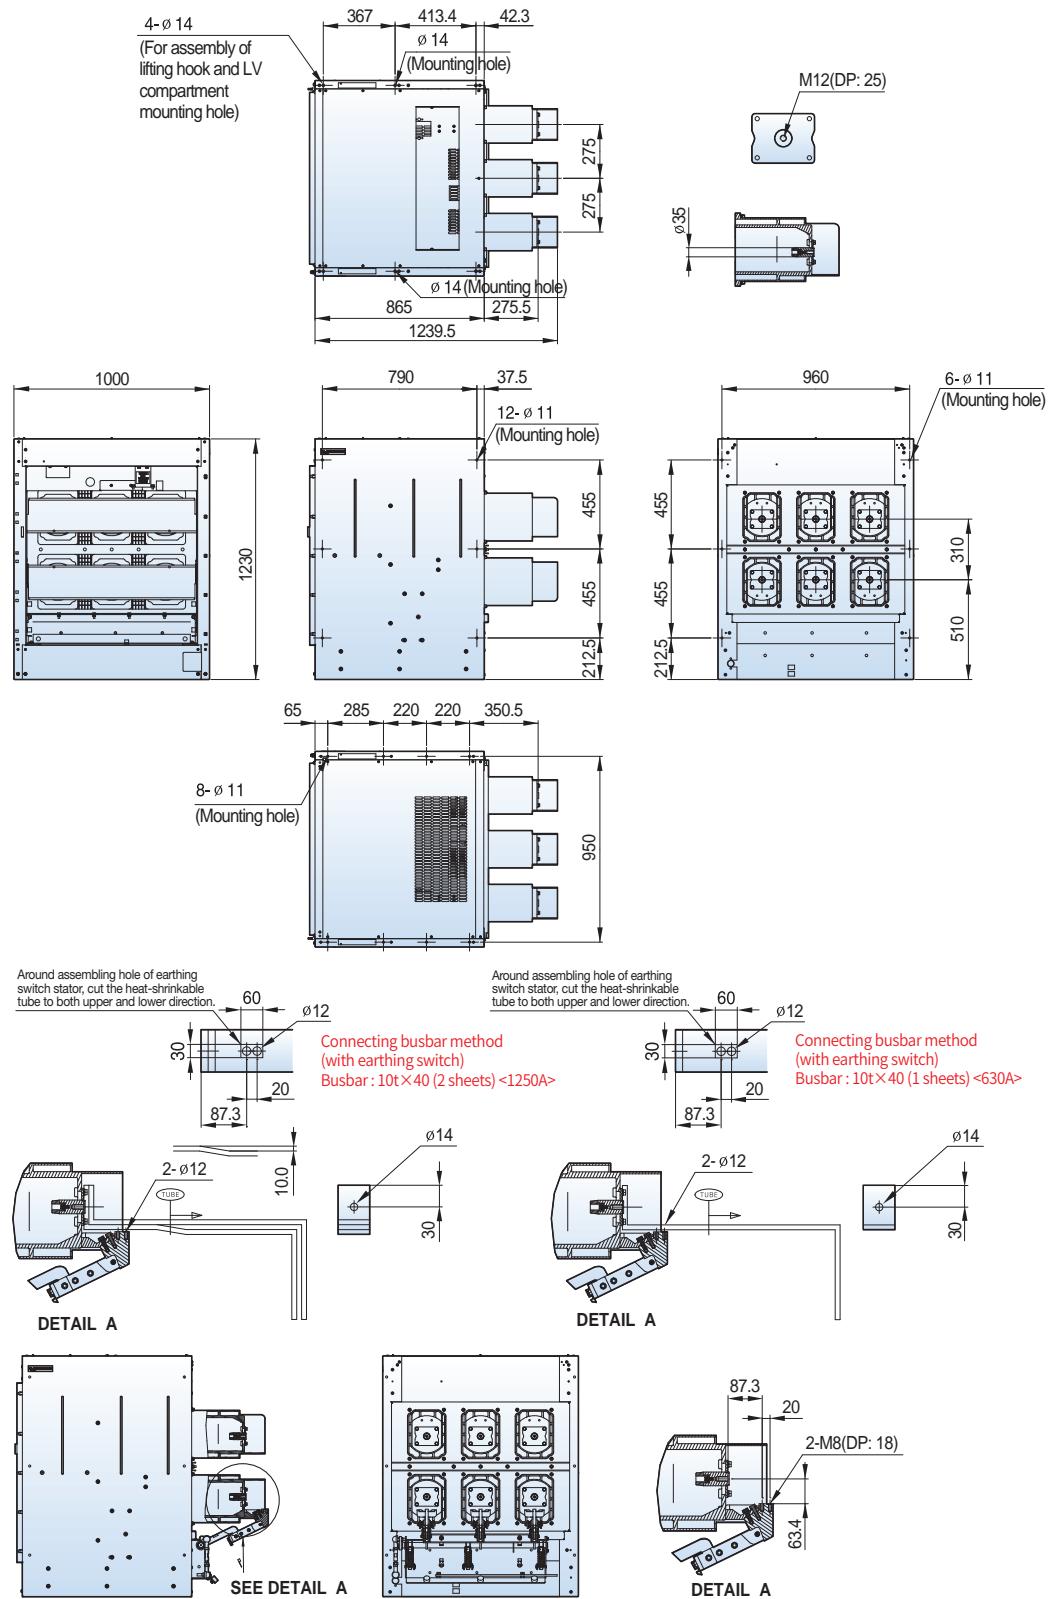

## 24/25.8kV 25kA 2000A

### Withdrawable

#### H type cradle, phase distance 210mm

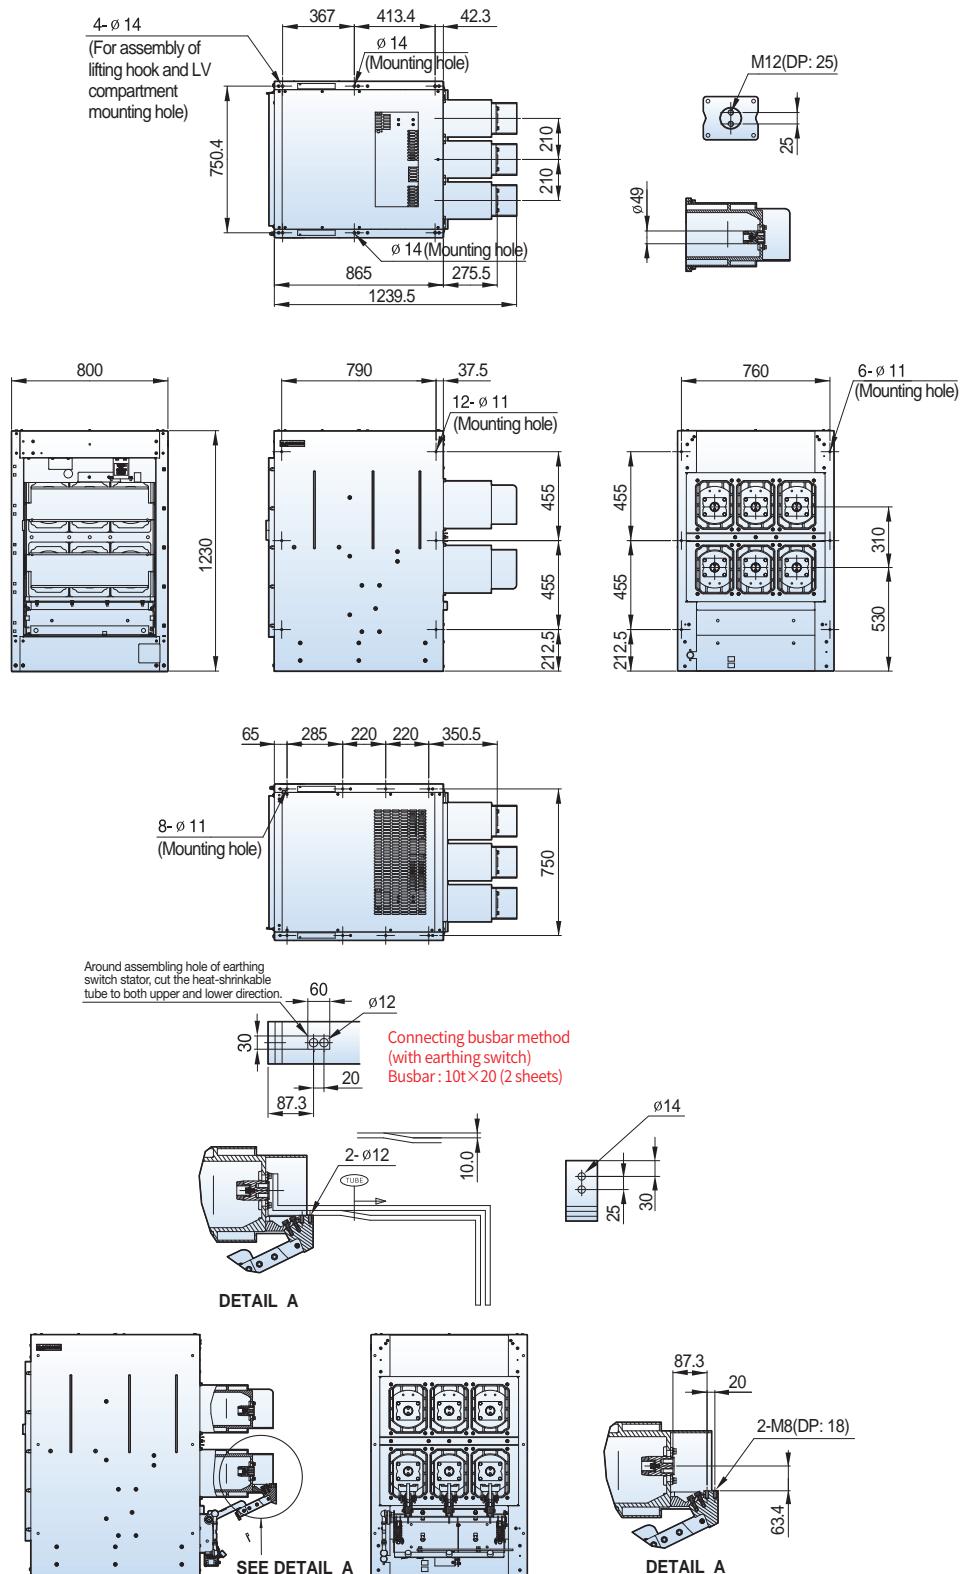


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 24/25.8kV 25kA 2000A

**Withdrawable**


■ H type cradle, phase distance 275mm

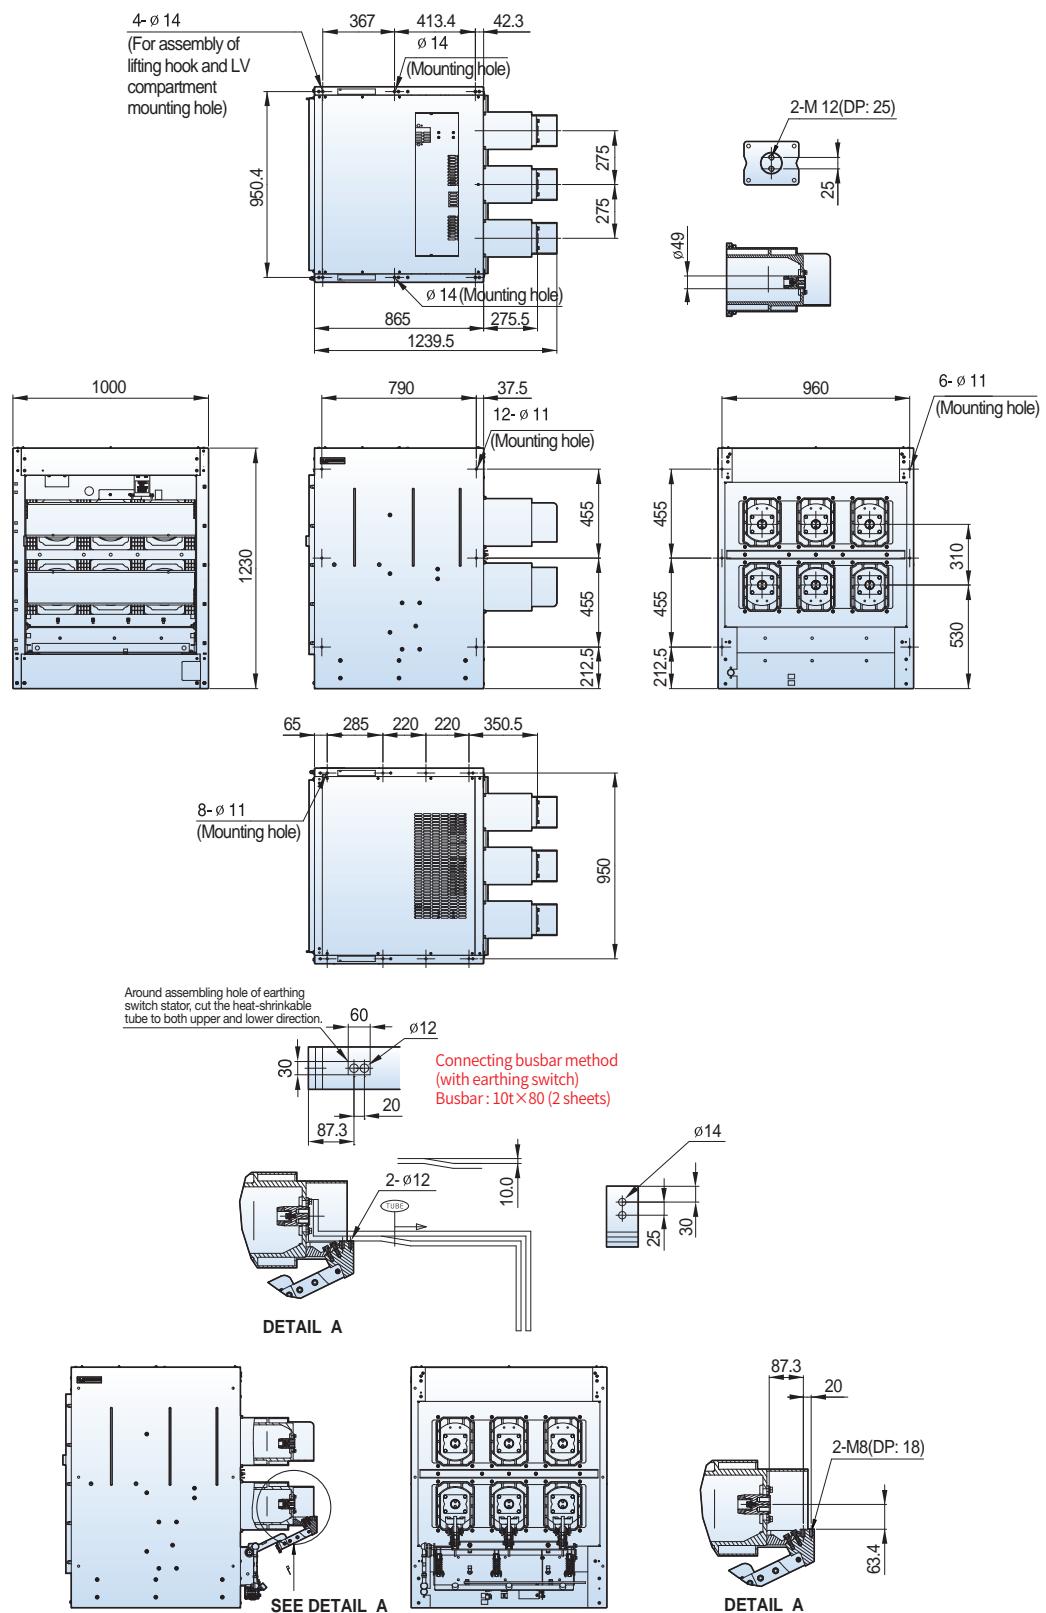

## 24/25.8kV 25kA 2500A

### Withdrawable

#### H type cradle, phase distance 275mm

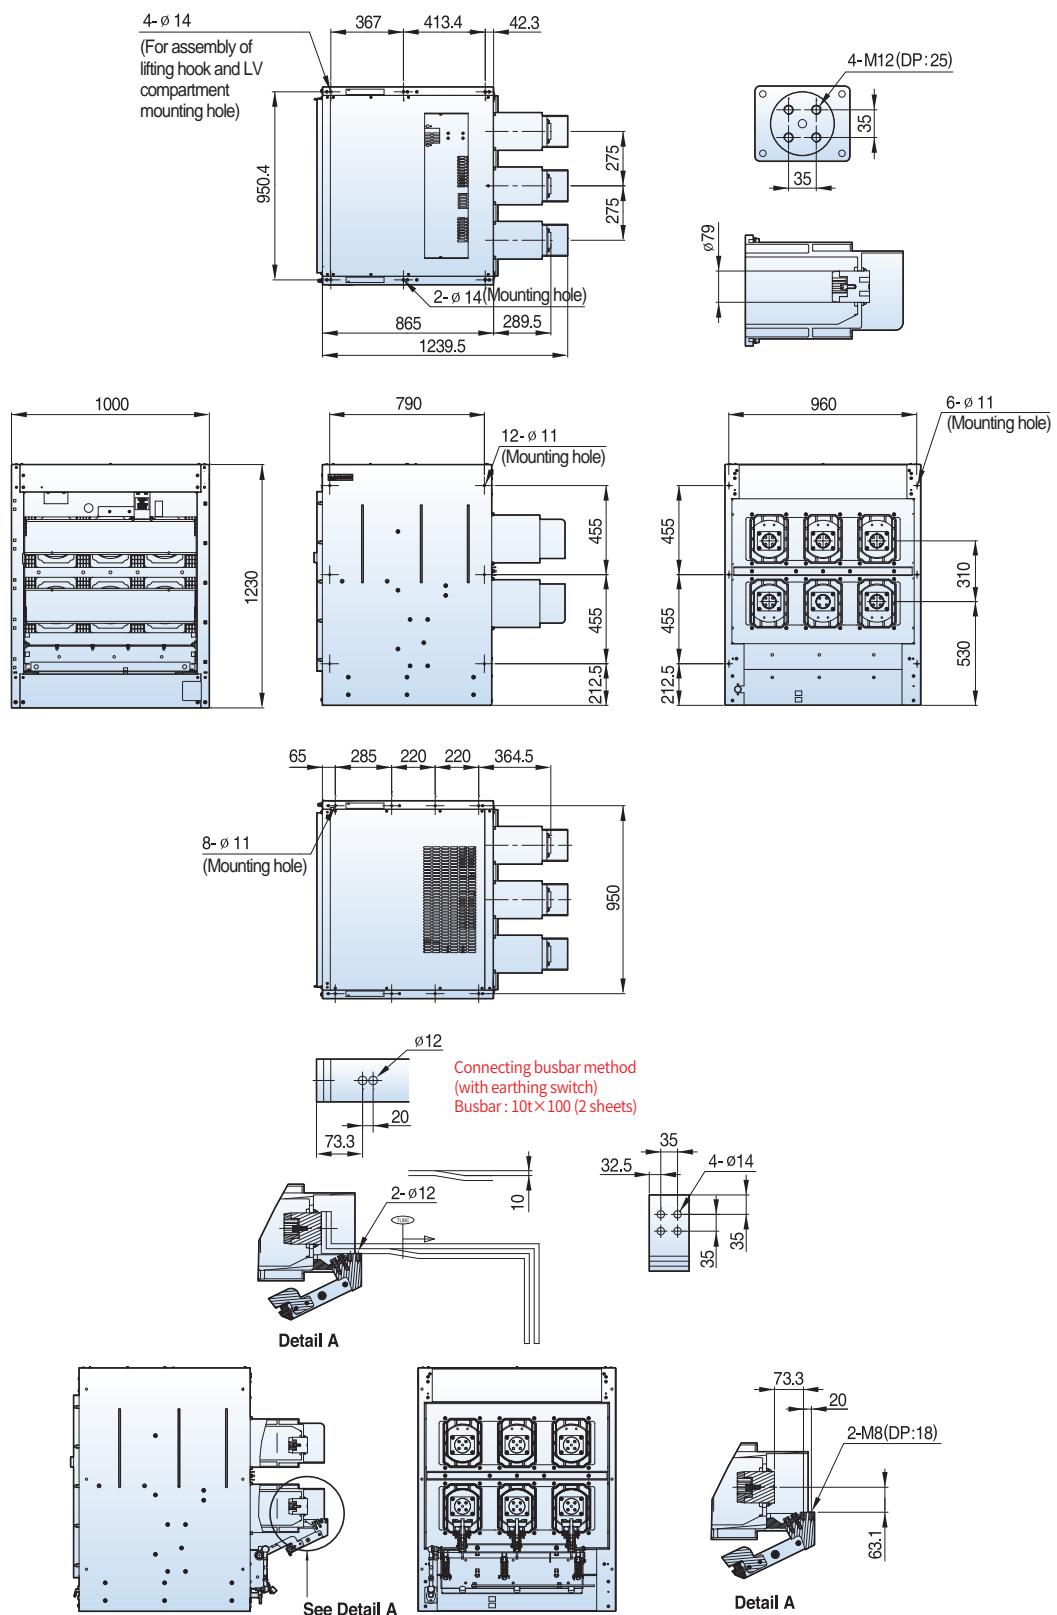


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 36kV 25kA 630/1250A


**Fixed**

■ P type, phase distance 275mm

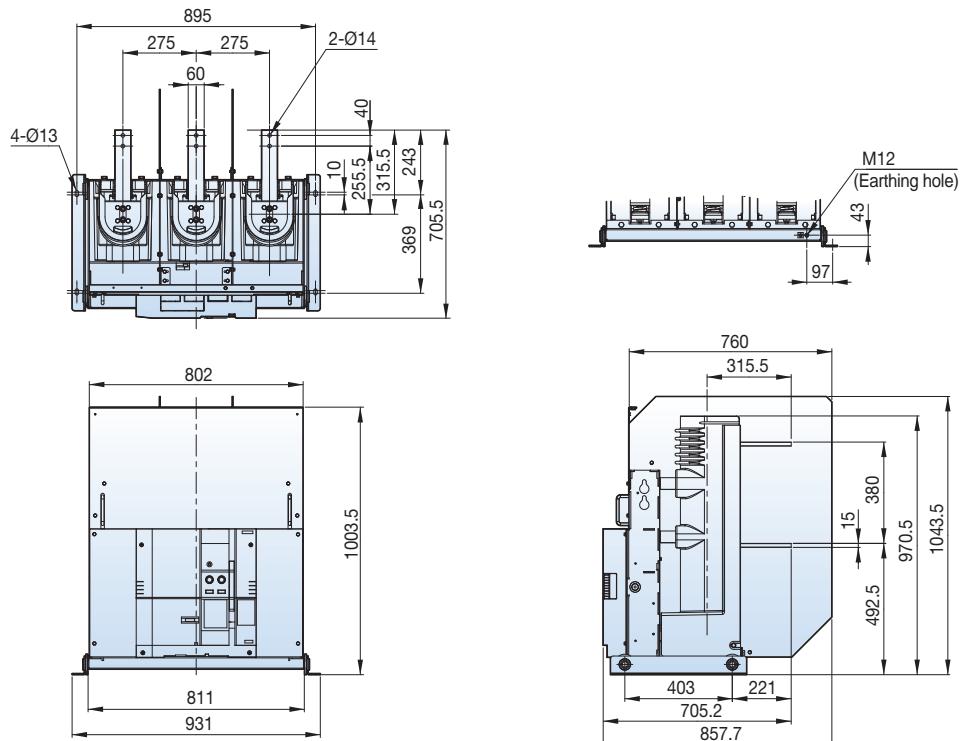

**Withdrawable**


■ H type unit, phase distance 275mm

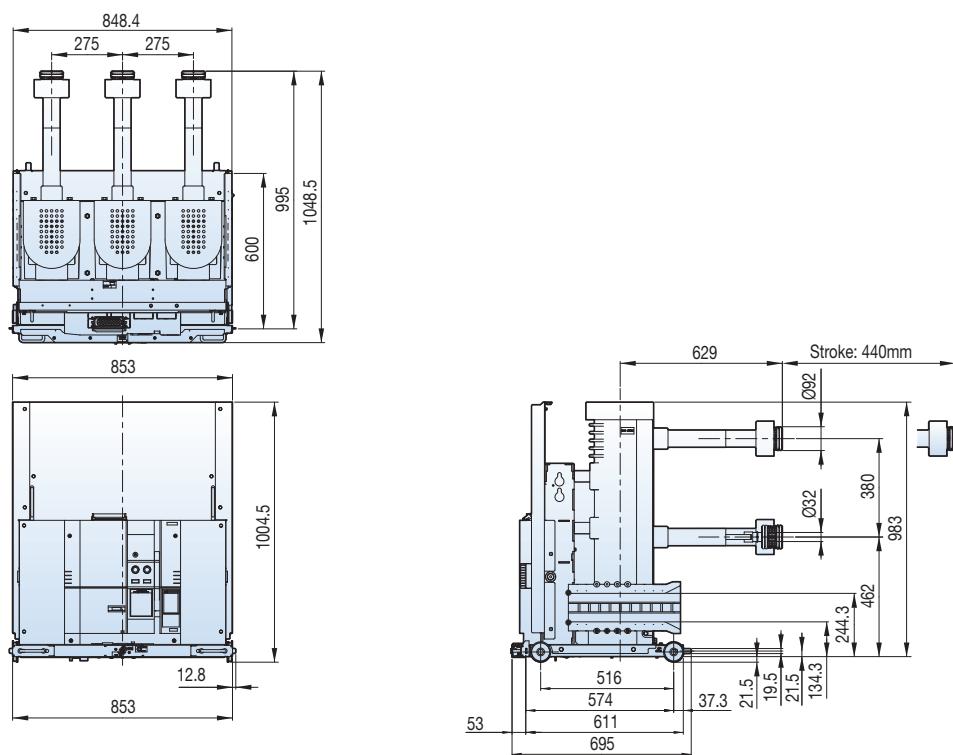

## 36kV 25kA 630/1250A

### Withdrawable

#### H type cradle, phase distance 275mm

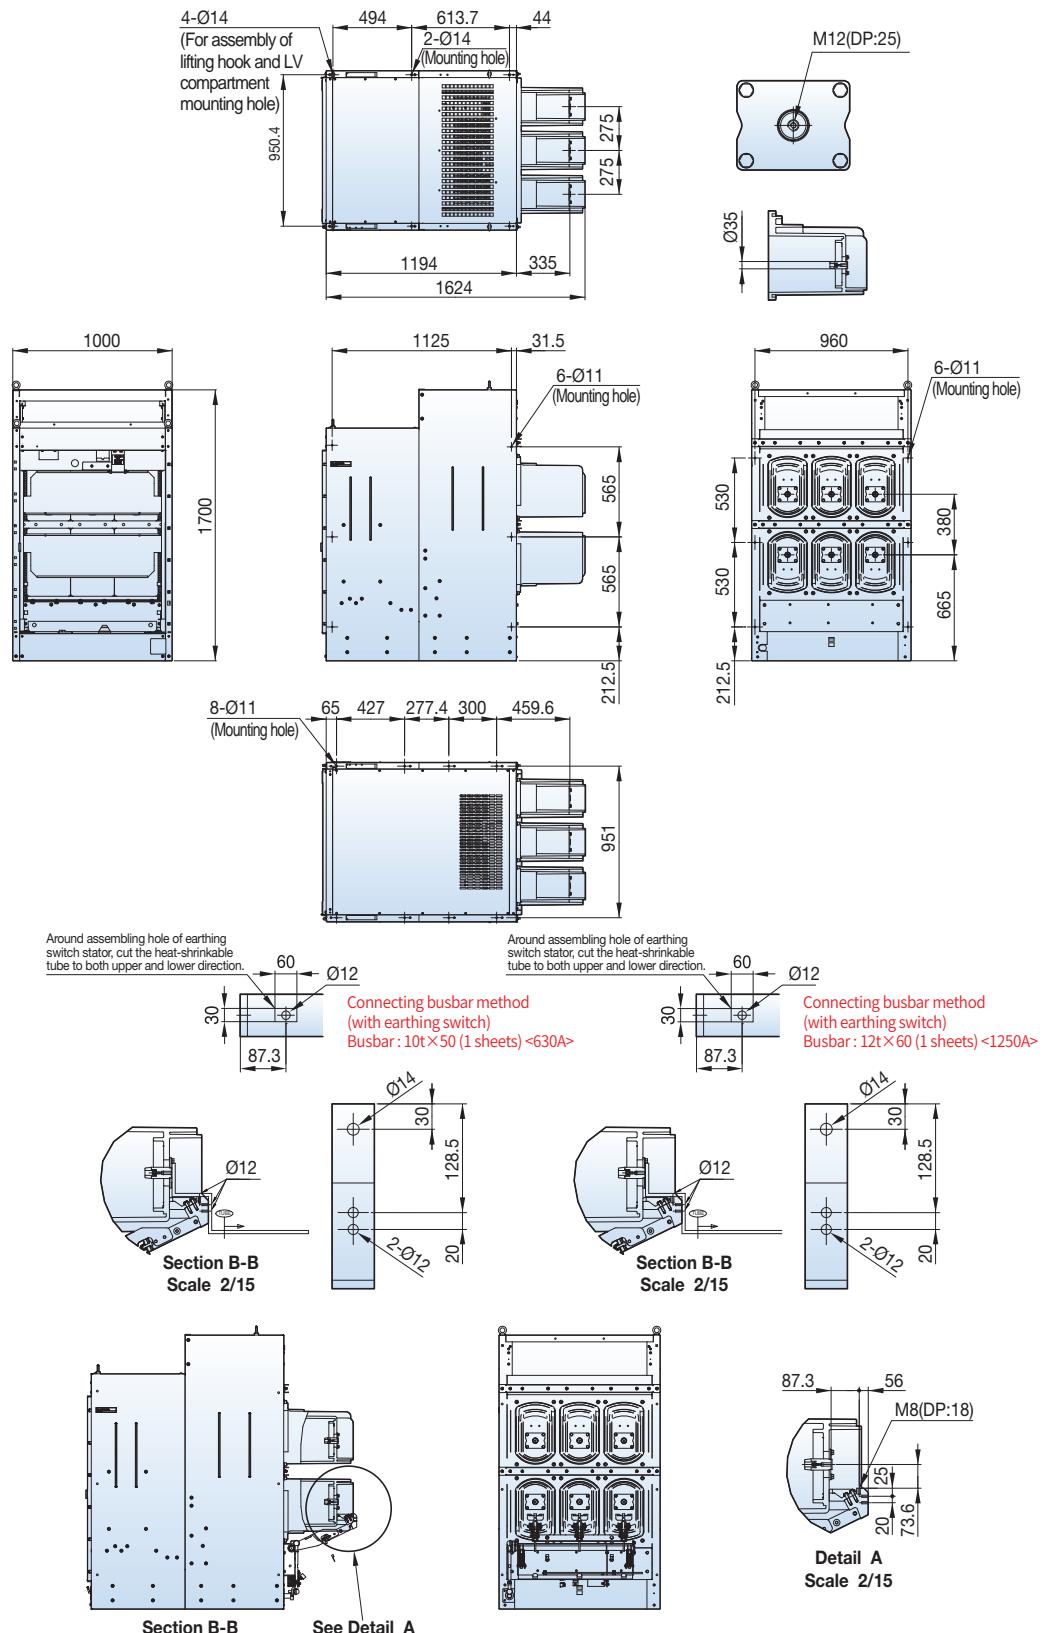


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 36kV 25kA 2000A


**Fixed**

■ P type, phase distance 275mm

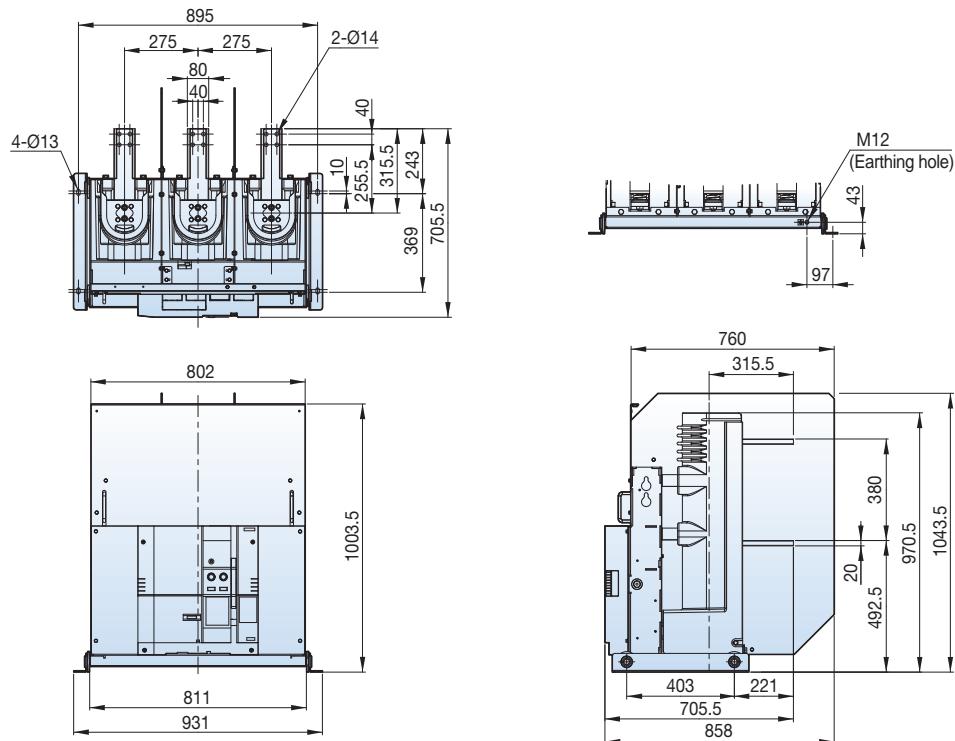

**Withdrawable**


■ H type unit, phase distance 275mm

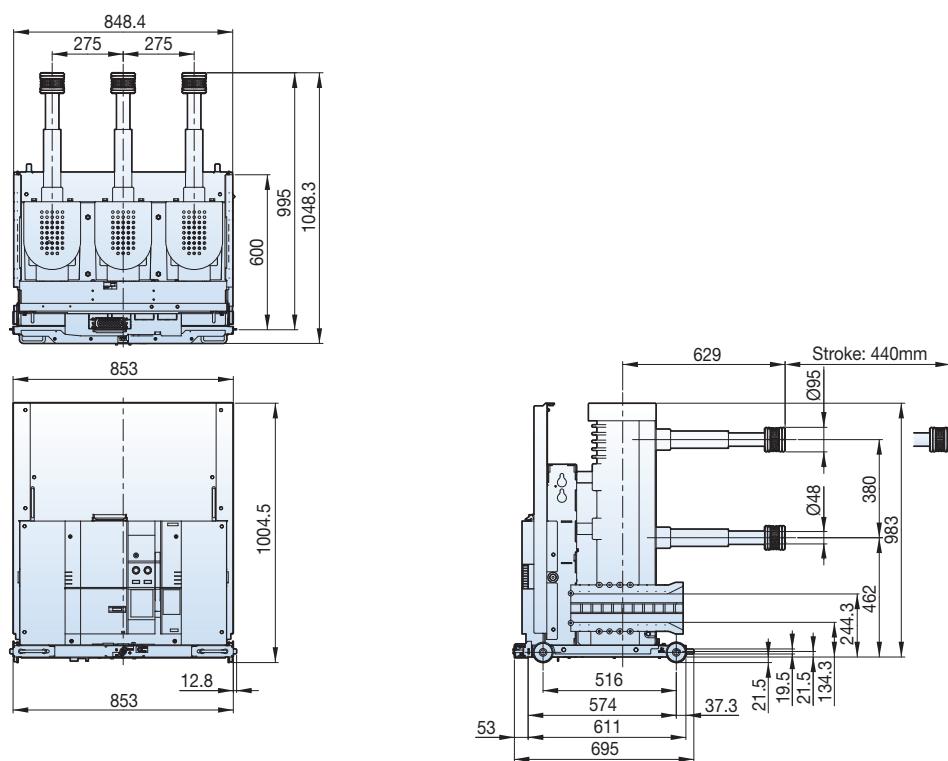

## 36kV 25kA 2000A

**Withdrawable**

■ H type cradle, phase distance 275mm

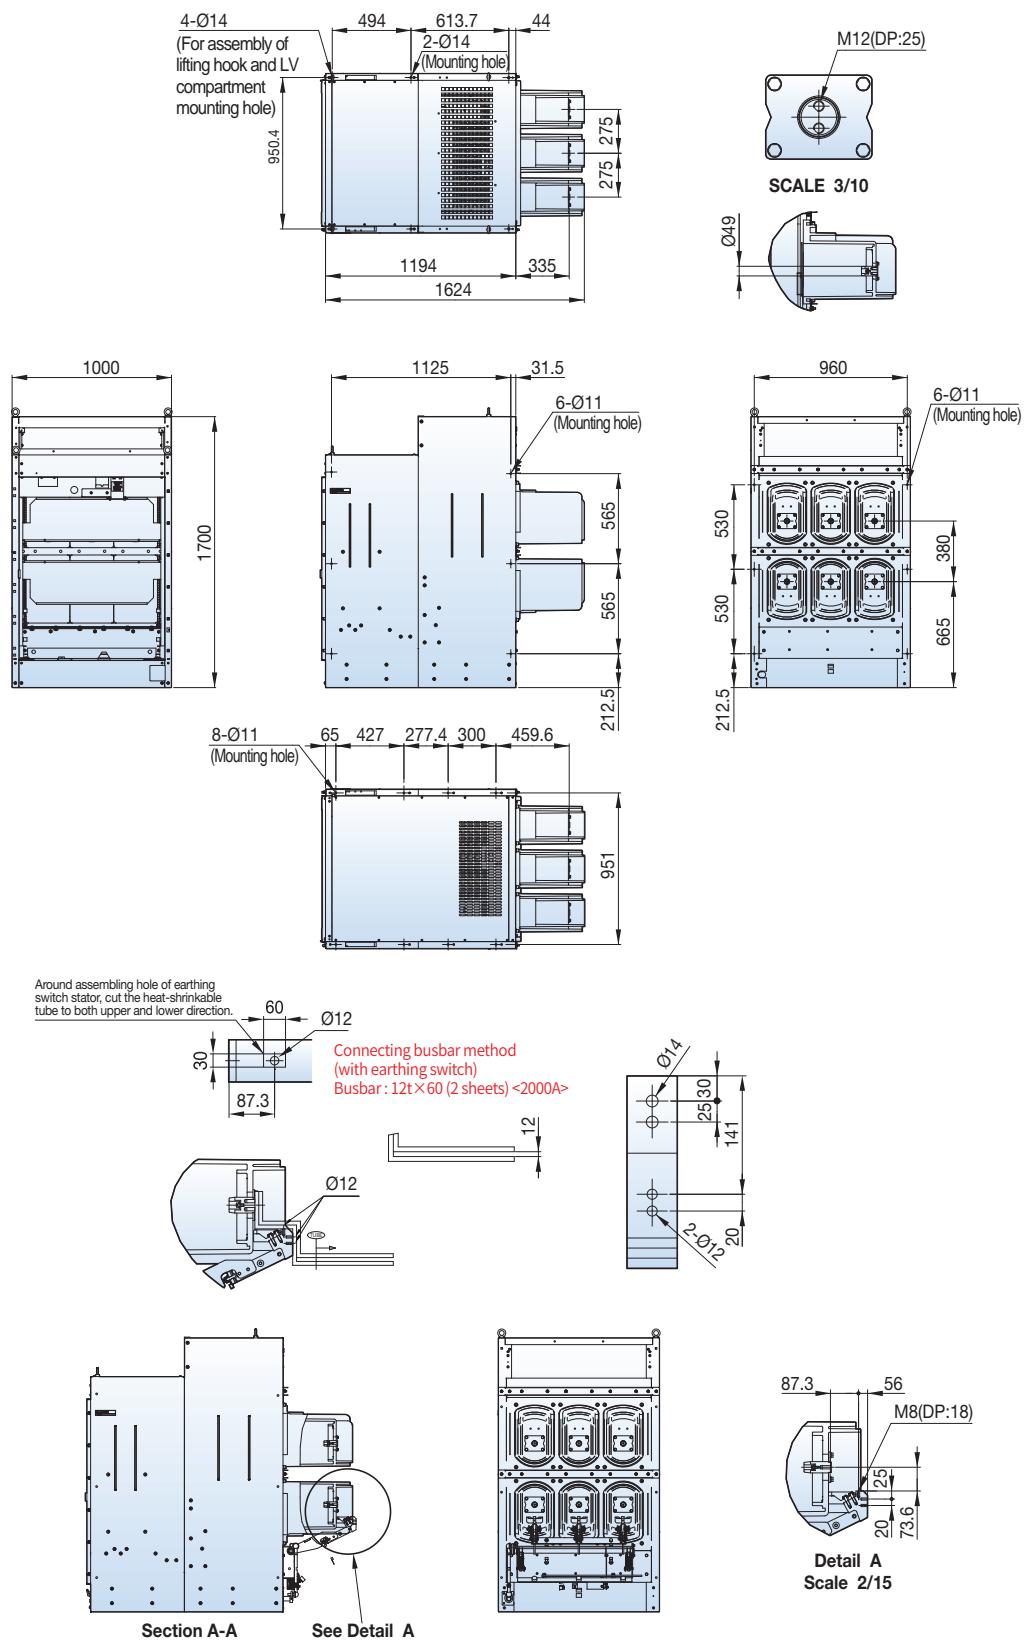


# Dimensions - VL type (VL-06/12/17/20/25/36)

## 36kV 25kA 2500A


### Fixed

#### ■ P type, phase distance 275mm

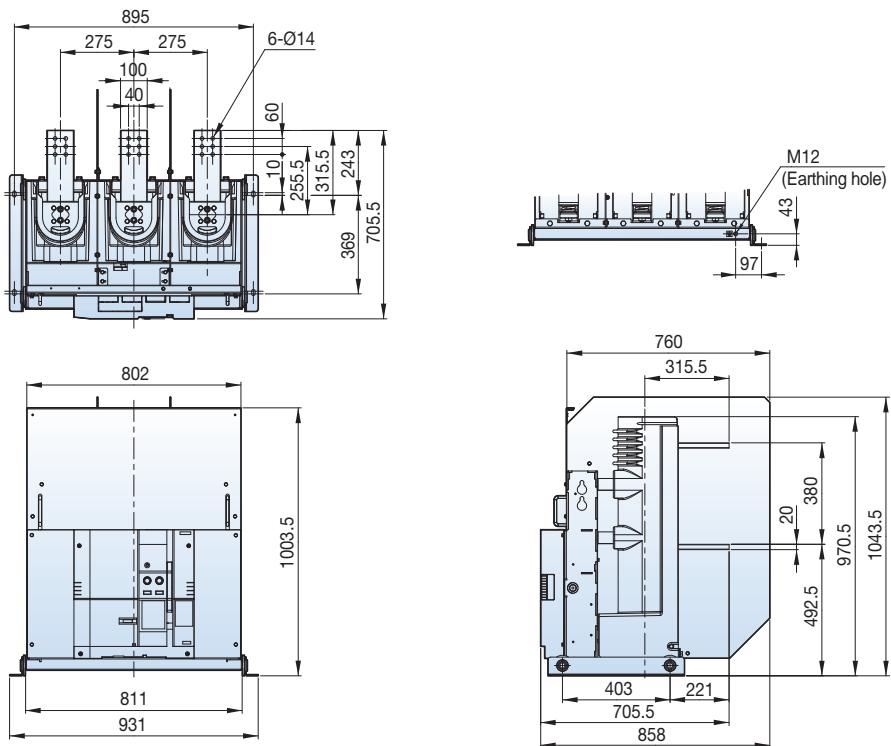

### Withdrawable







#### ■ H type unit, phase distance 275mm

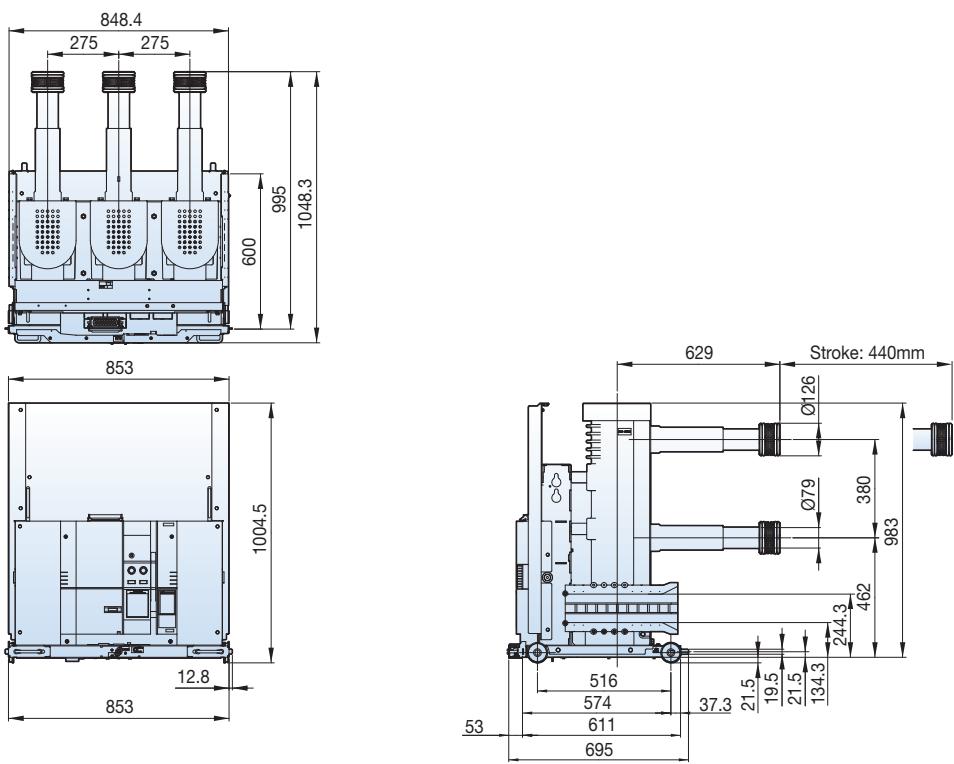


## 36kV 25kA 2500A

**Withdrawable**

### H type cradle, phase distance 275mm

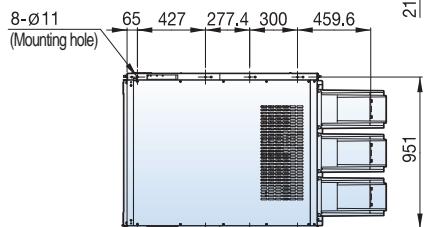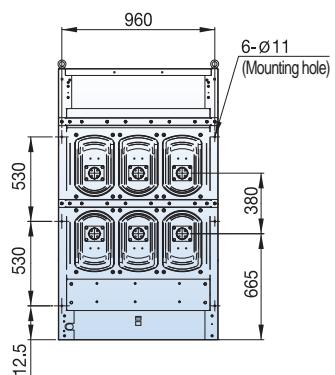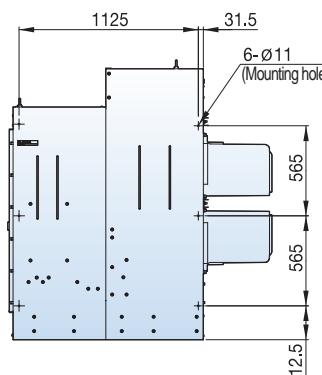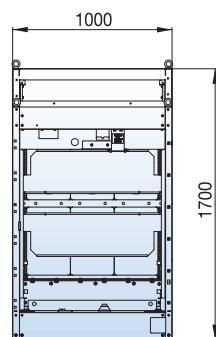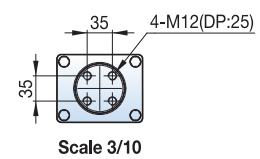
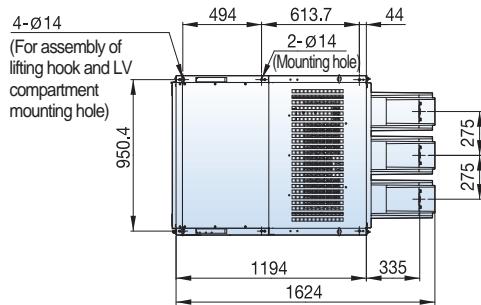


Around assembling hole of earthing switch stator, cut the heat-shrinkable tube to both upper and lower direction.


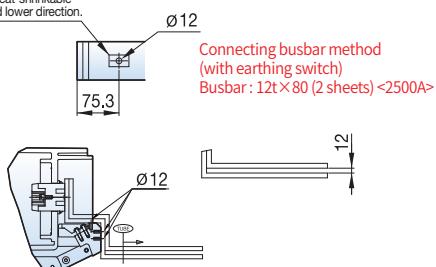


Section A-A

Scale 2/15

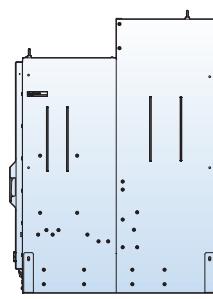

See Detail A

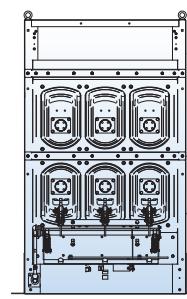


Detail A

# Dimensions - LVB, VH type (LVB, VH-06/12)

**7.2kV, 40kA, 1250/2000A**


## Fixed



### ■ P type, phase distance 150mm

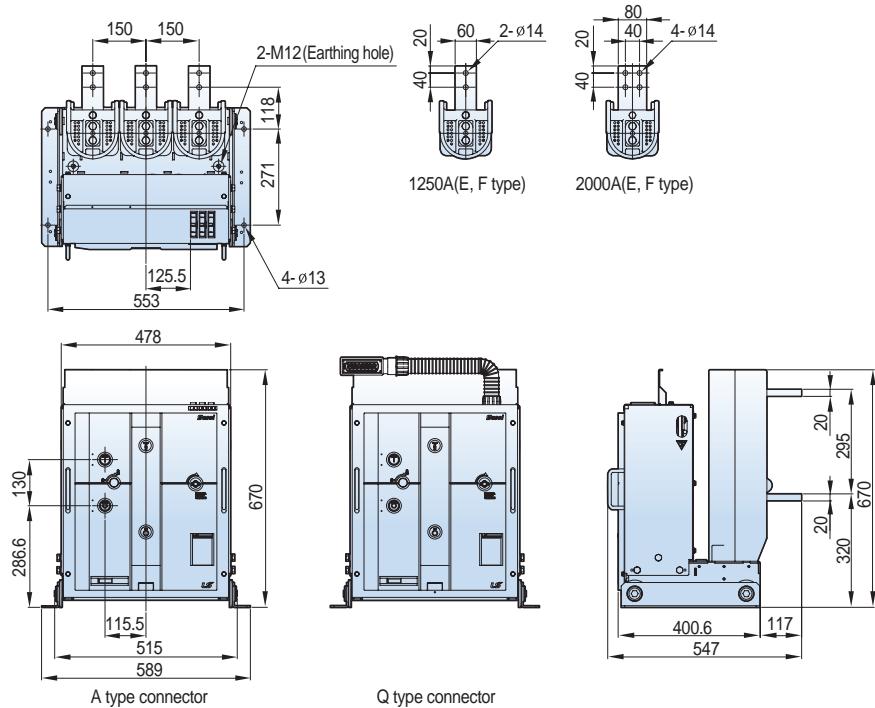

## Withdrawable

### ■ E,F,G type unit, phase distance 150mm

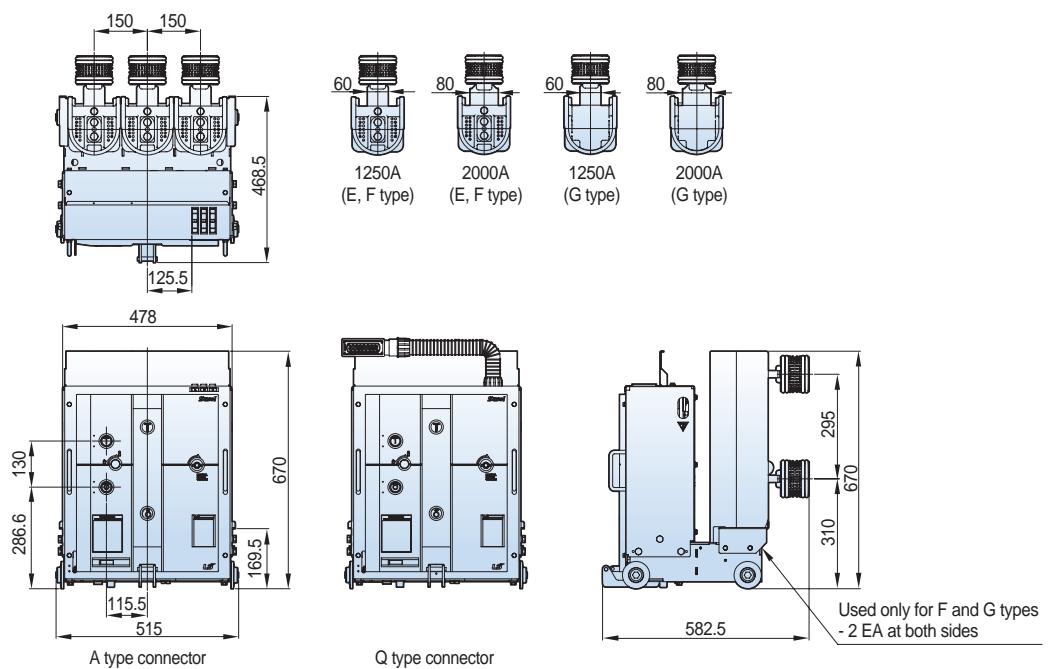

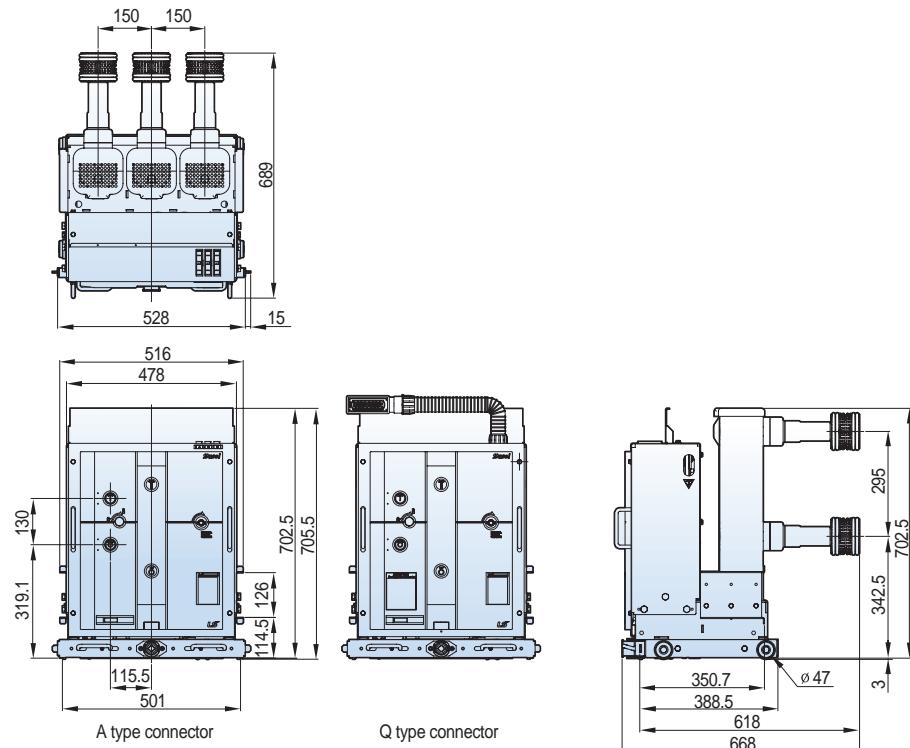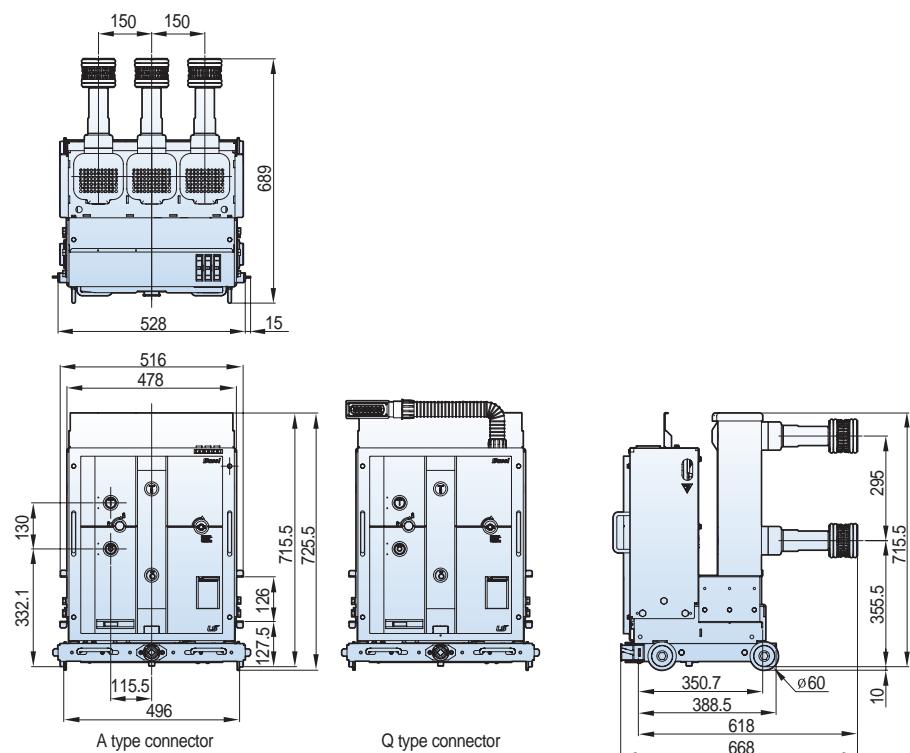
**7.2/12kV, 40kA, 1250/2000A****Withdrawable****■ MCGS type unit, phase distance 150mm: option type T****7.2/12kV, 31.5/40kA, 1250/2000A****Withdrawable****■ MCGS type unit, phase distance 150mm: option type T2(standard)**

# Dimensions - LVB, VH type (LVB, VH-06/12)

## 7.2kV, 40kA 1250/2000A


**Withdrawable**

■ E type cradle, phase distance 150mm

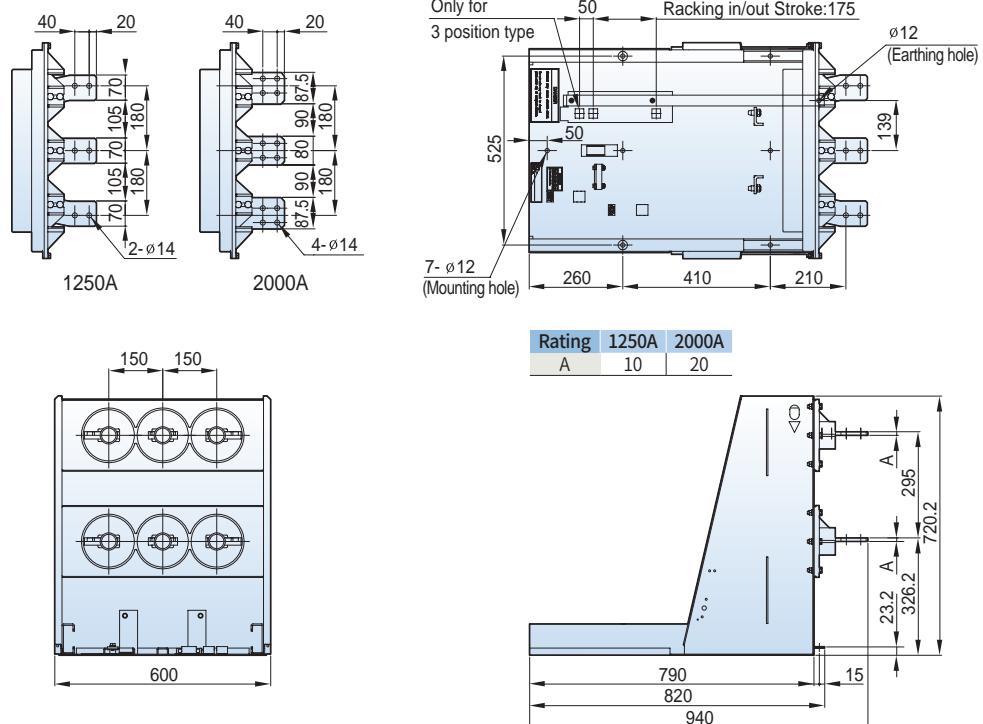

**Withdrawable**






■ F, G type cradle, phase distance 150mm

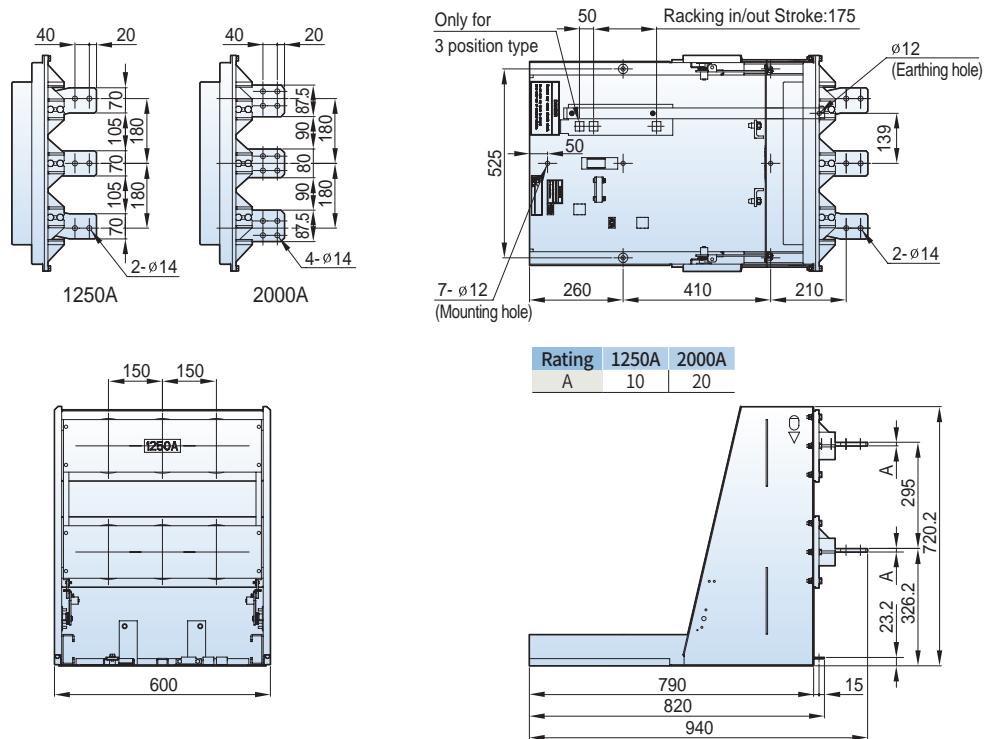

## 7.2/12kV, 40kA 1250/2000A

**Withdrawable**

■ MCGS type cradle, phase distance 150mm

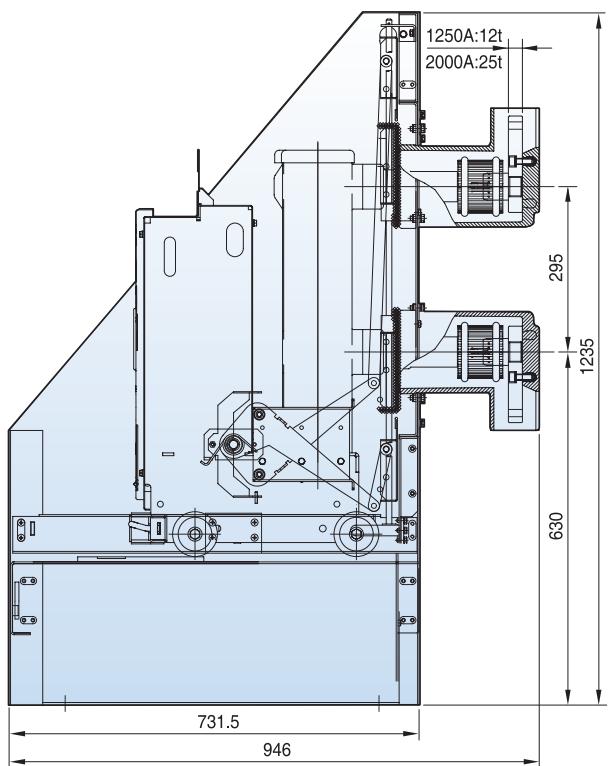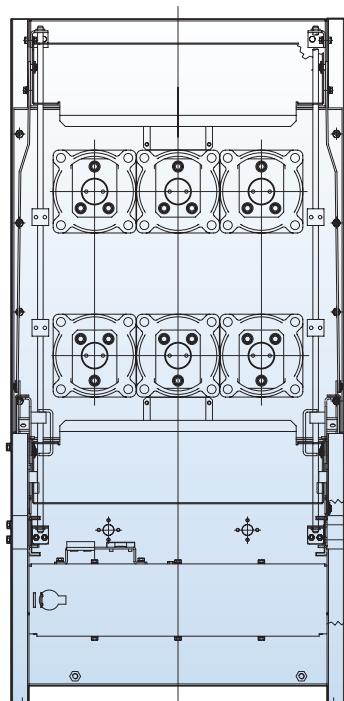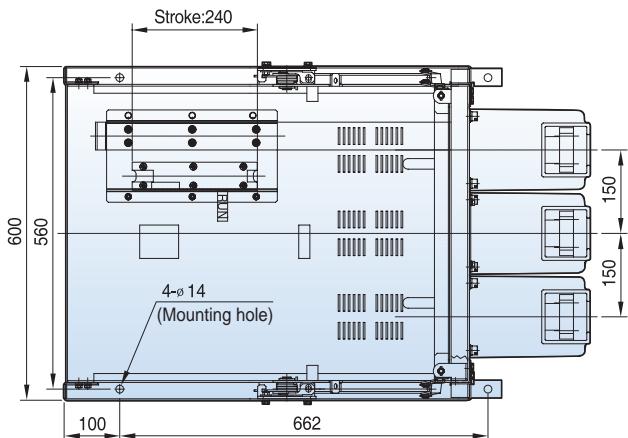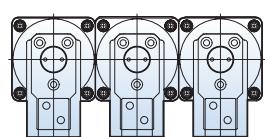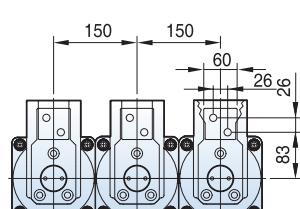


# Dimensions - LVB, VH type (LVB, VH-06/12)

**7.2kV, 31.5/40kA, 3150A**


## Fixed



### ■ P type, phase distance 210mm

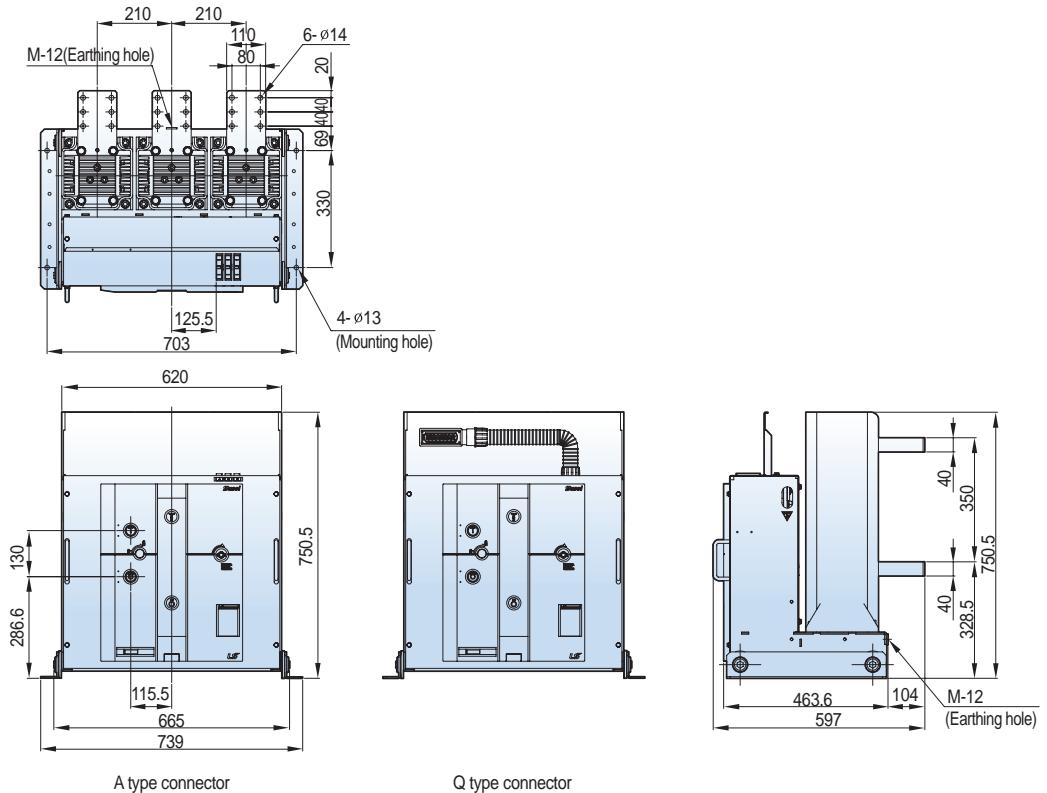

## Withdrawable

### ■ E,F,G type unit, phase distance 210mm

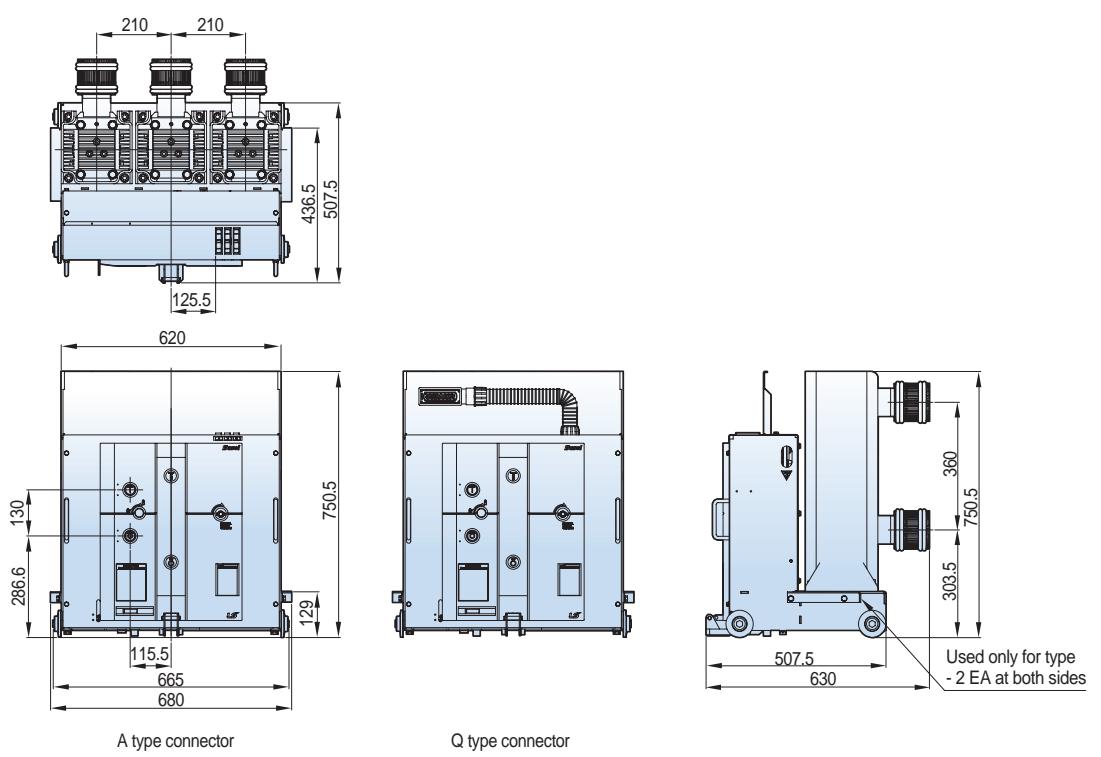

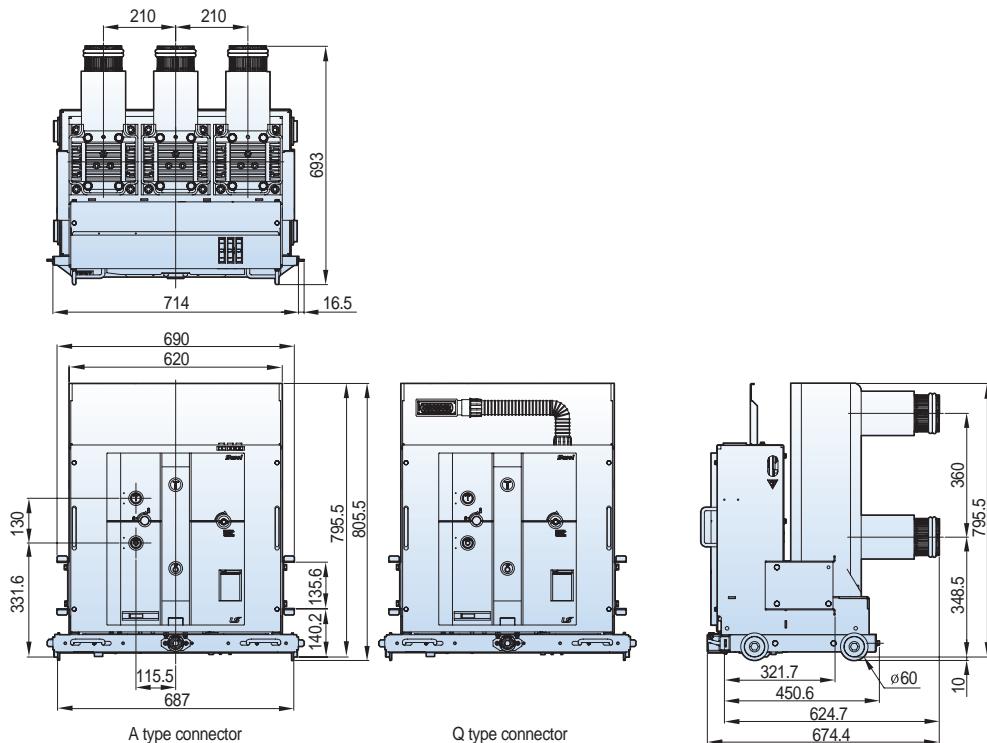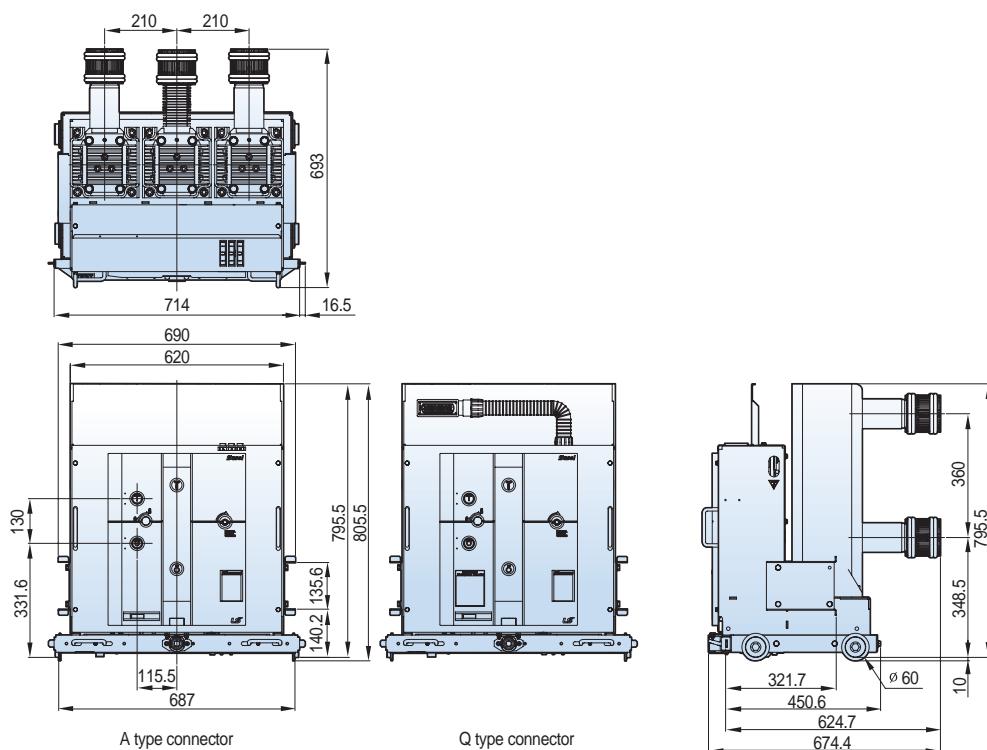
**7.2kV, 31.5/40kA, 3150A****Withdrawable****■ MCGS type unit, phase distance 210mm****12kV, 31.5/40kA, 3150A****Withdrawable****■ MCGS type unit, phase distance 210mm**

# Dimensions - LVB, VH type (LVB, VH-06/12)

**7.2kV, 31.5/40kA 3150A**


**Withdrawable**

■ E type cradle, phase distance 210mm

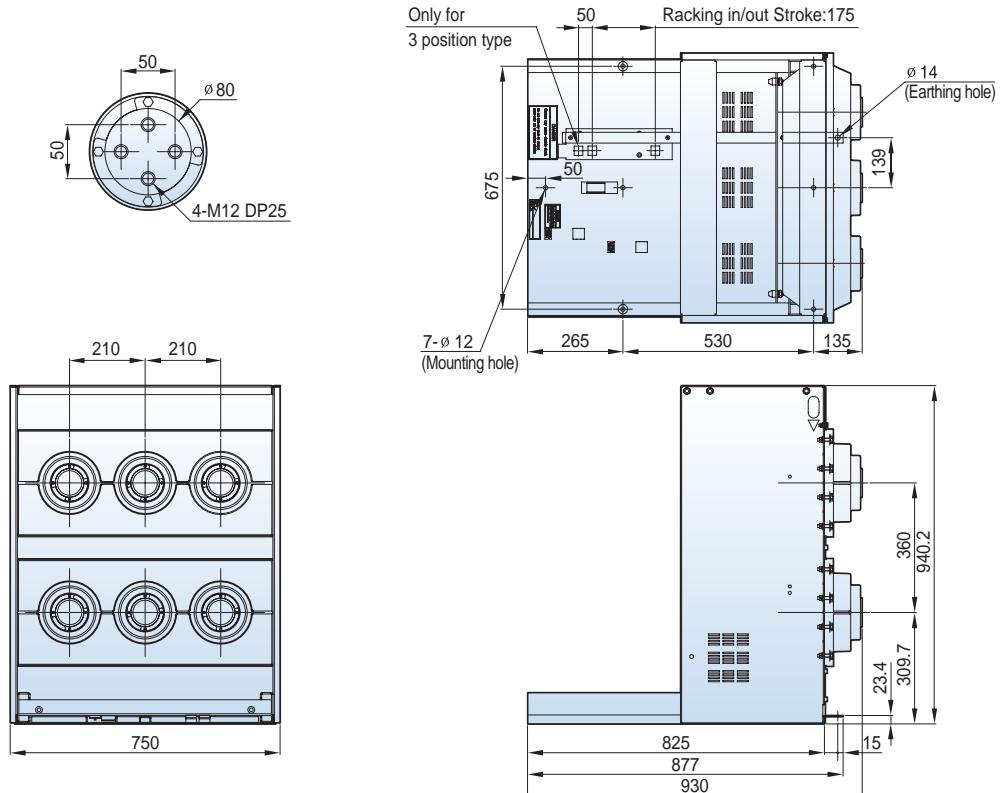

**Withdrawable**





■ F, G type cradle, phase distance 210mm

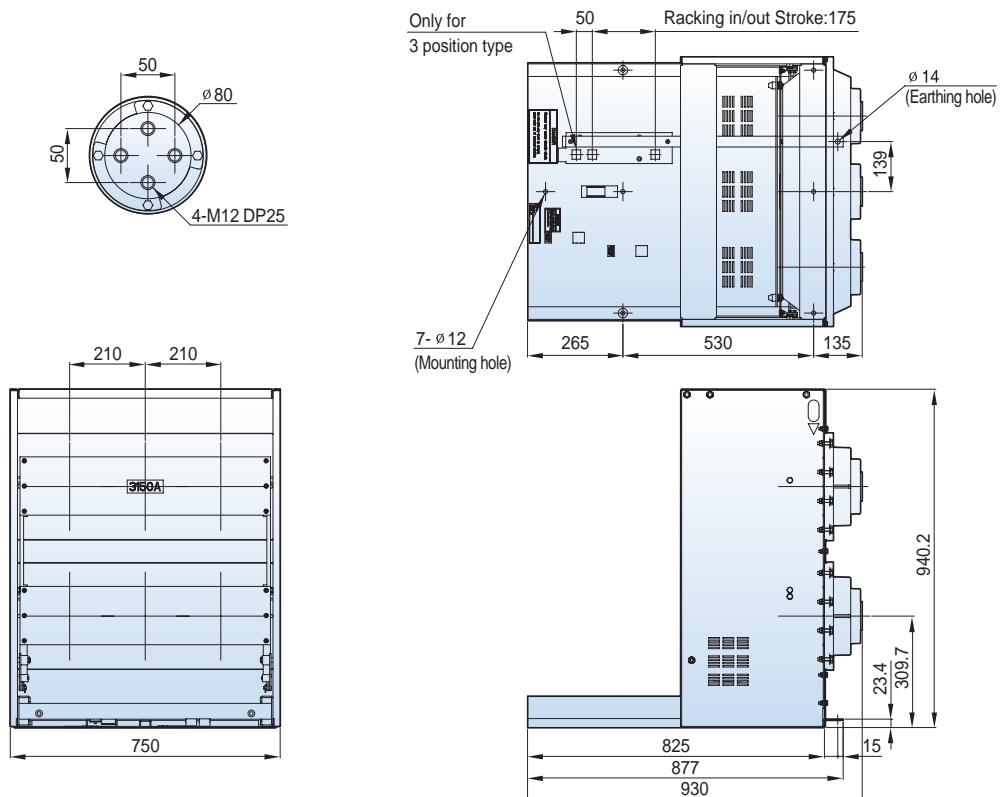

## 7.2/12kV, 31.5/40kA 3150A

**Withdrawable**

■ MCGS type cradle, phase distance 210mm

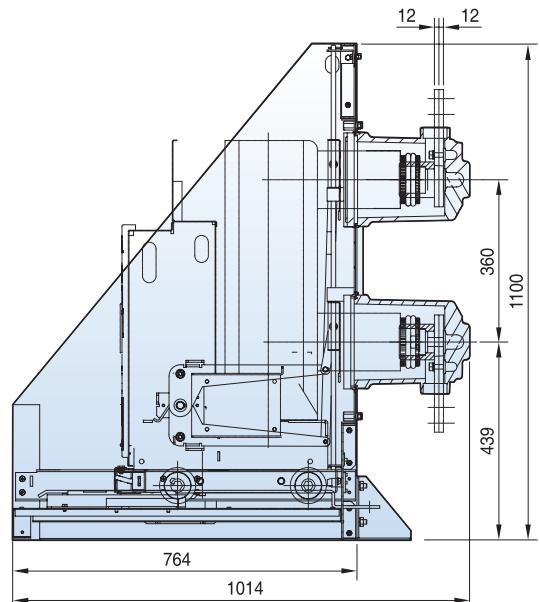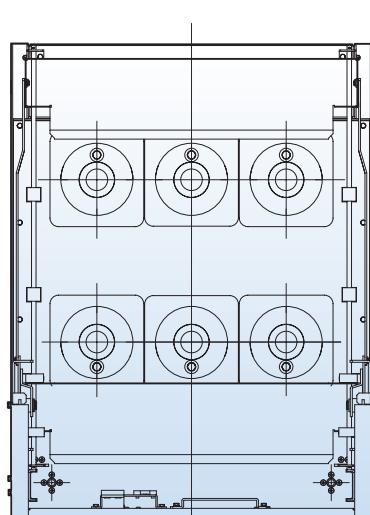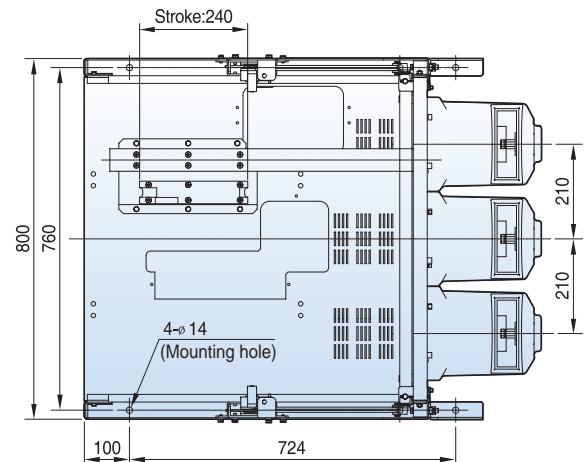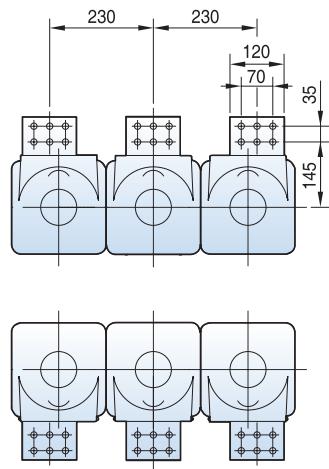


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2kV 40kA 1250/2000A**


**Withdrawable**



■ Fs type unit, phase distance 150mm

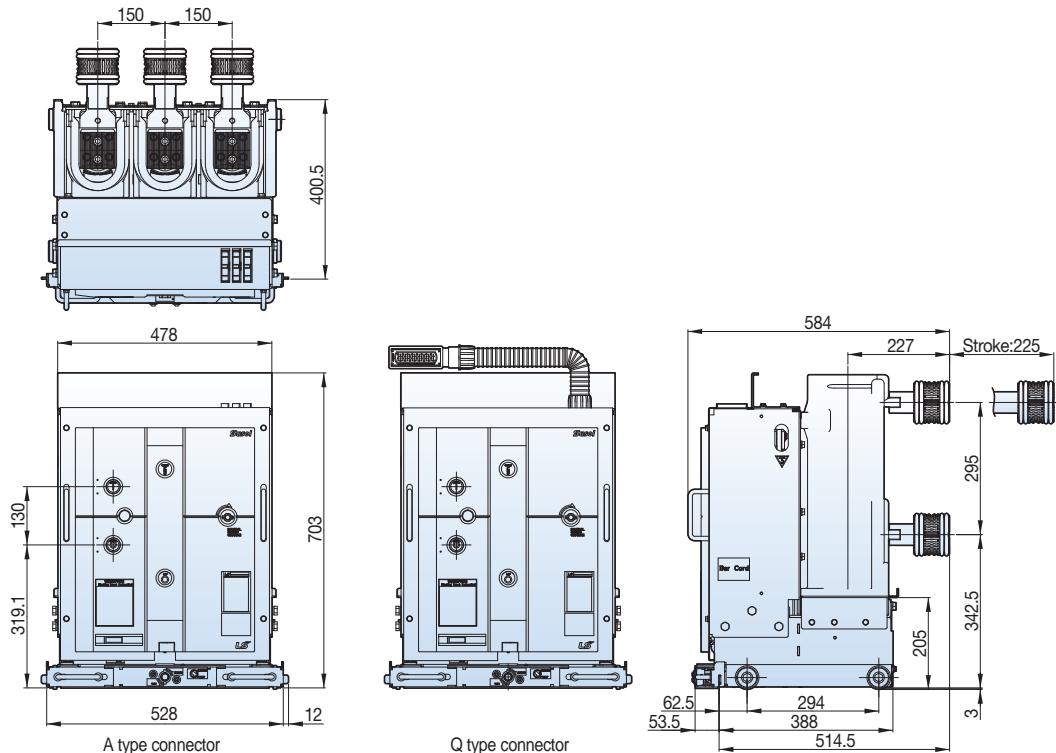

**Withdrawable**

■ Fs type cradle, phase distance 150mm

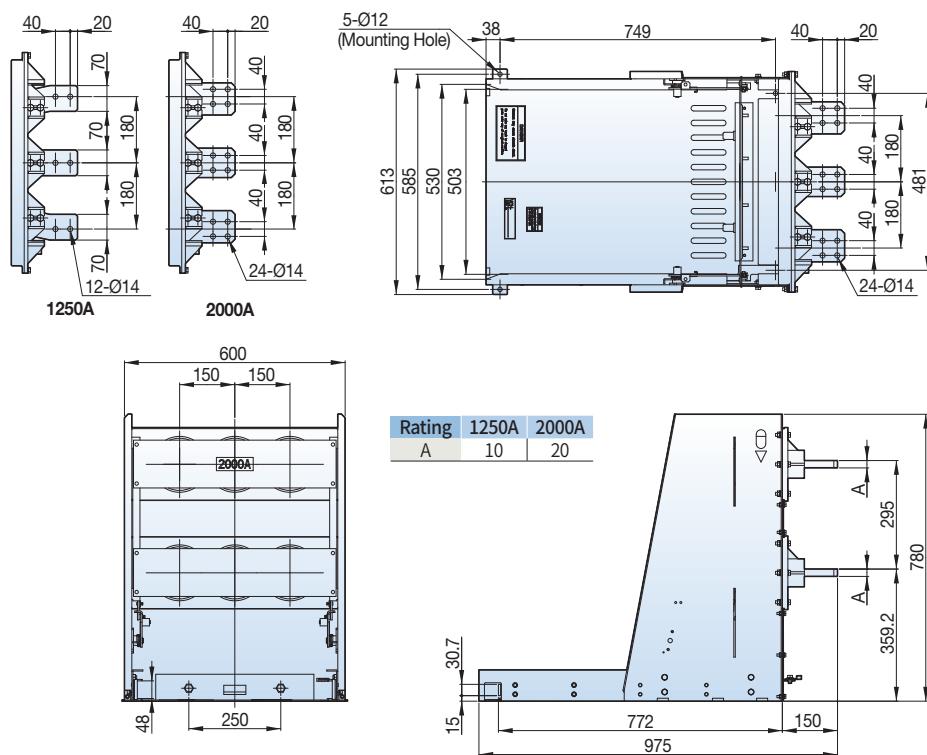

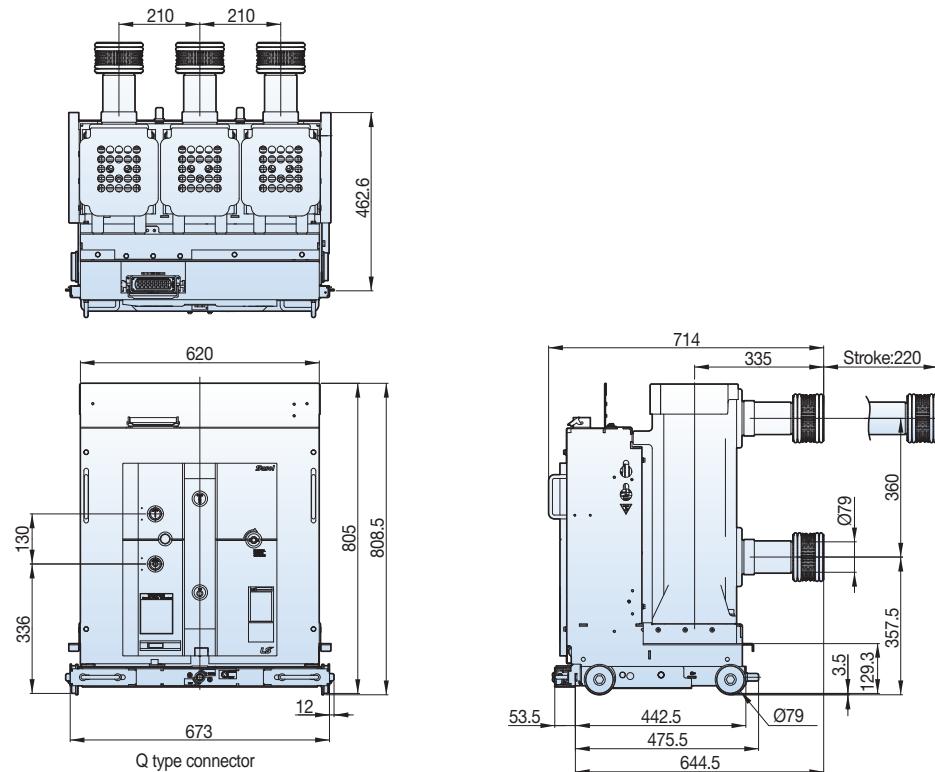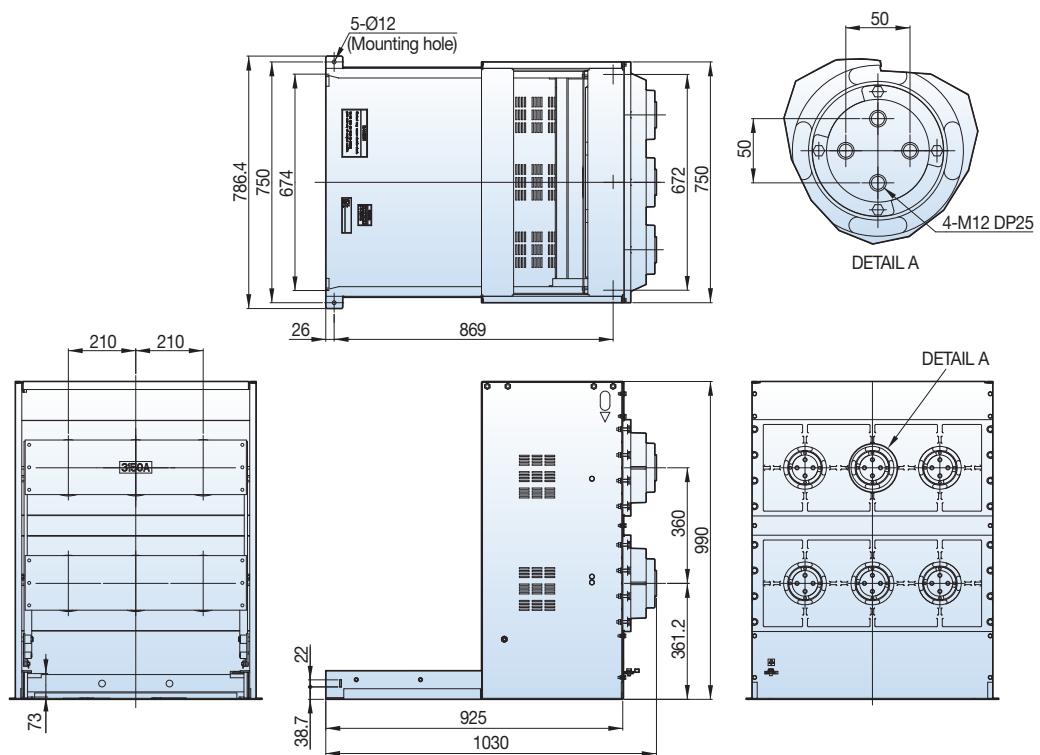
**7.2kV, 31.5/40kA, 3150A****Withdrawable****■ Fs type unit, phase distance 210mm****Withdrawable****■ Fs type cradle, phase distance 210mm**

# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12kV, 40kA, 1250/2000A**


## Withdrawable

### ■ Gs type unit, phase distance 150mm

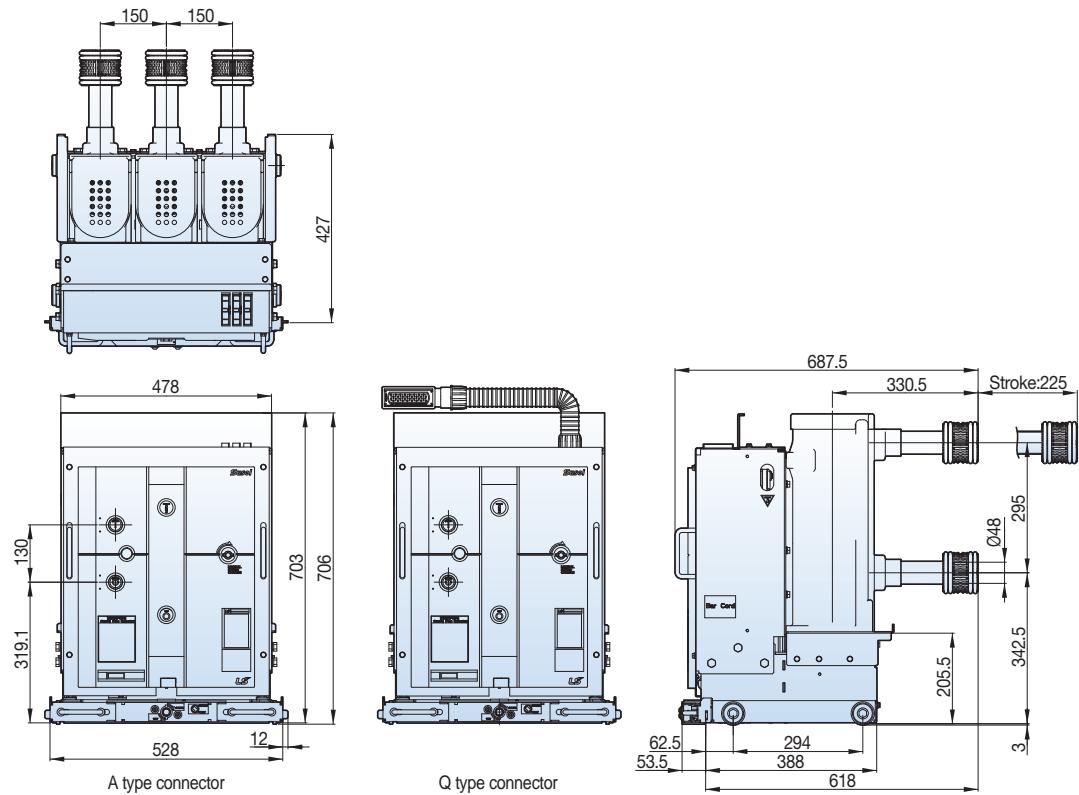

## Withdrawable


### ■ Gs type cradle, phase distance 150mm

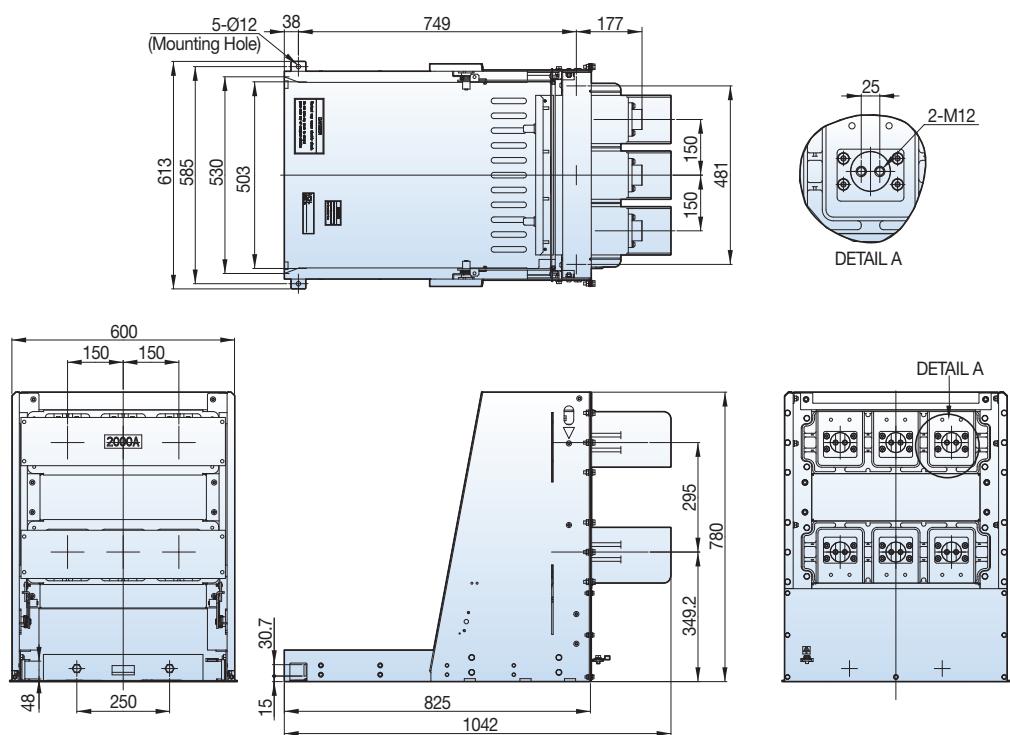

## 7.2/12kV, 31.5/40kA, 3150A


### Withdrawable

#### ■ Gs type unit, phase distance 210mm

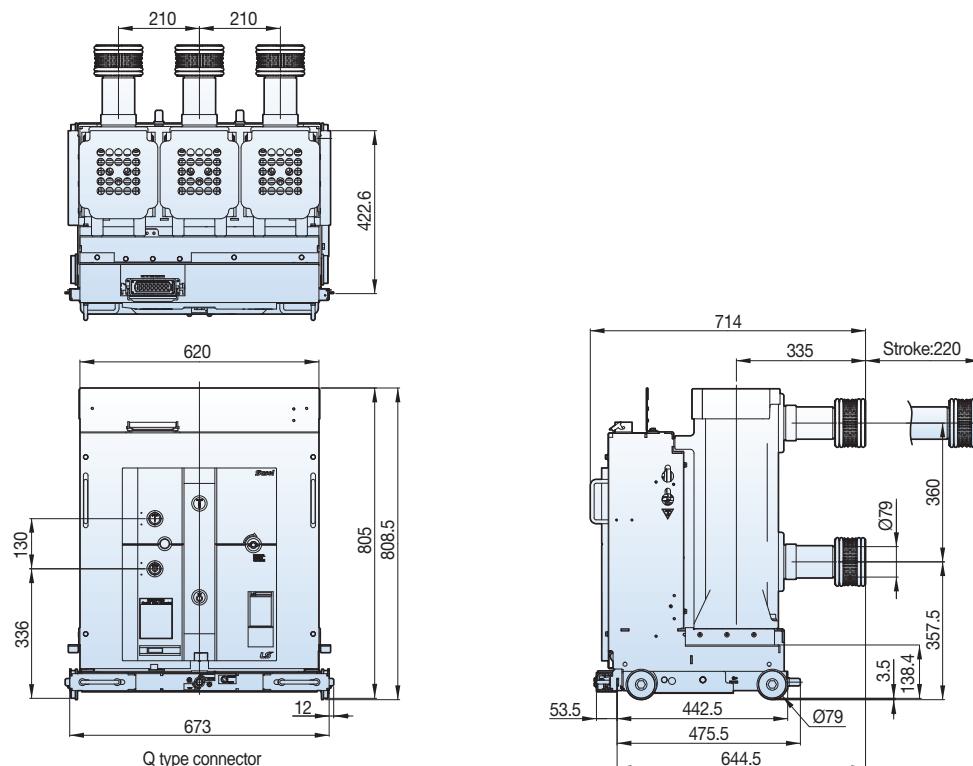

### Withdrawable

#### ■ Gs type cradle, phase distance 210mm

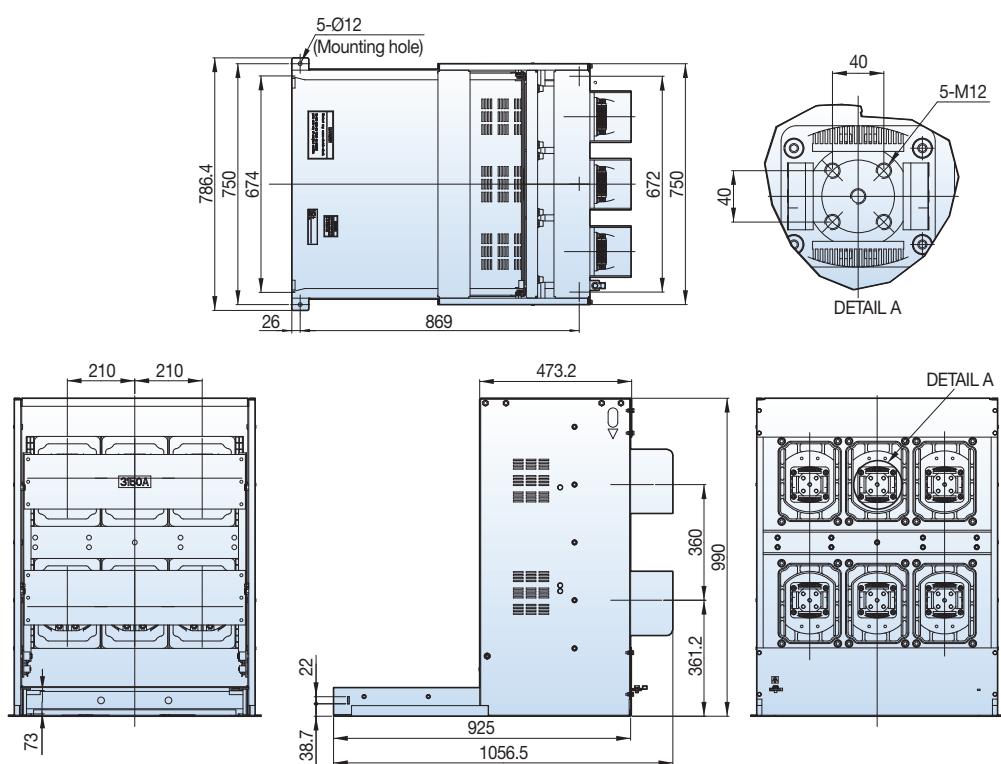


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12kV, 40kA, 1250/2000A**


**Withdrawable**

■ K type unit, phase distance 150mm, G / T (T) compatible

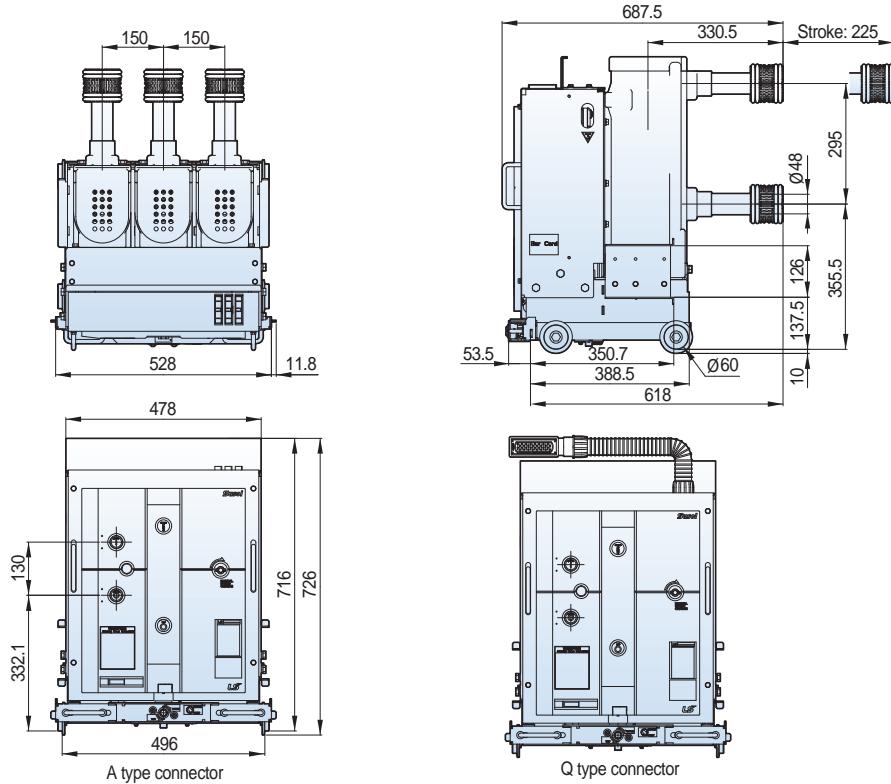

**Withdrawable**


■ K type unit, phase distance 150mm, G / T (T2) compatible

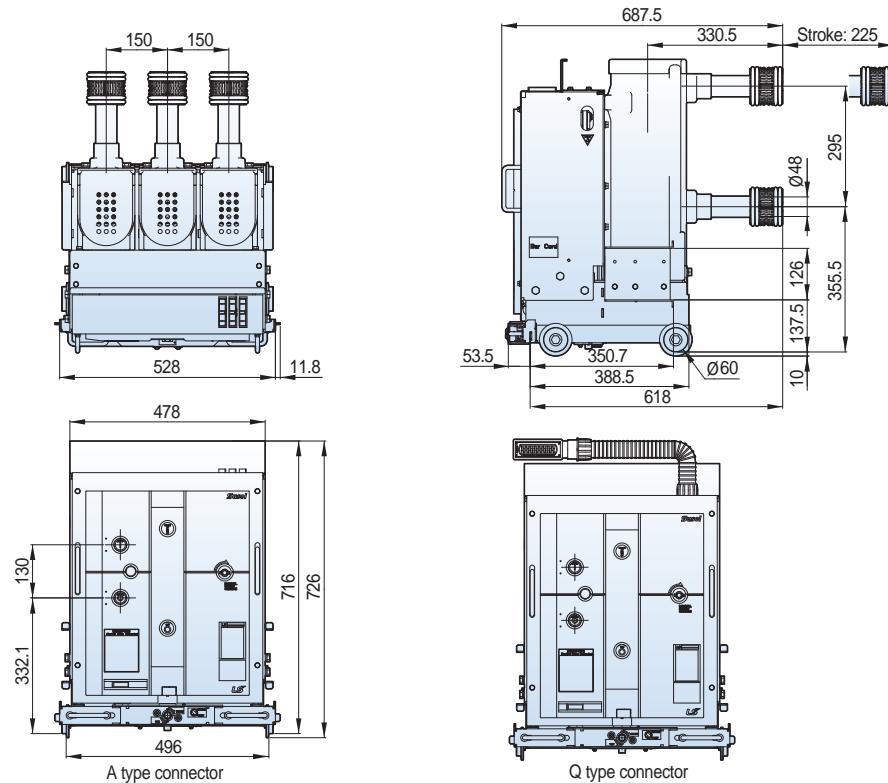

## 7.2/12kV, 40kA, 1250/2000A


### Withdrawable

#### ■ K type cradle, phase distance 150mm

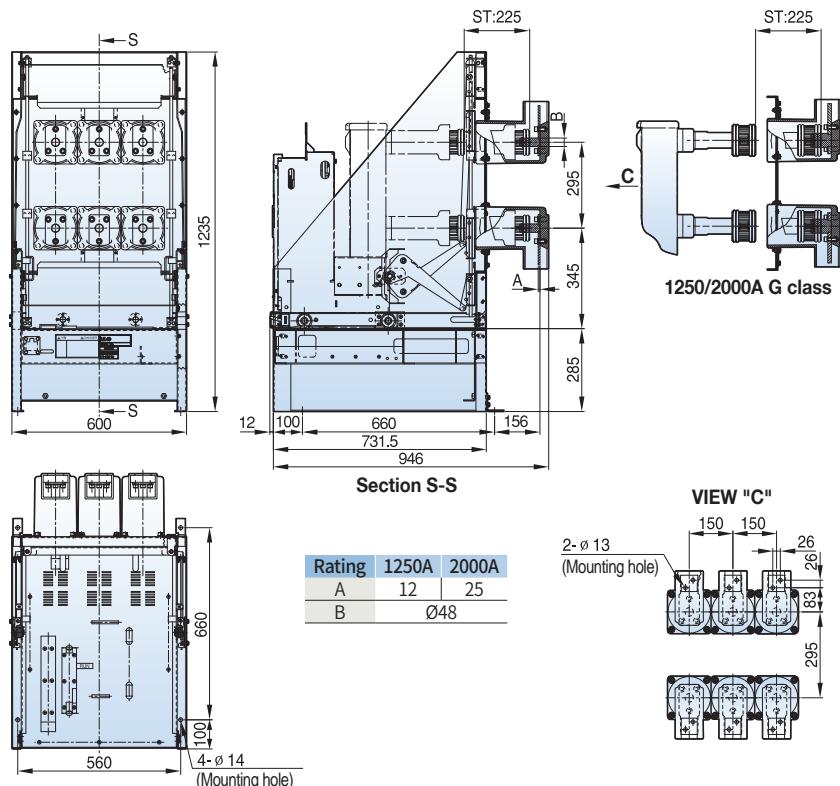

### Withdrawable

#### ■ MCSG cradle T2 type, phase distance 150mm

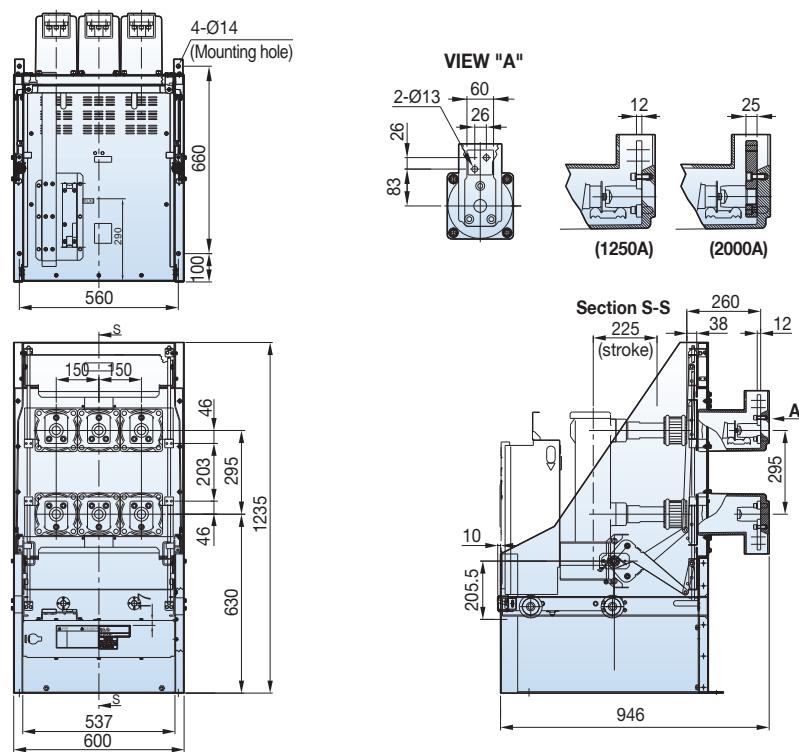


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 40kA, 1250/2000A**


## Withdrawable

■ K type unit, phase distance 210mm, G / T (T2) compatible

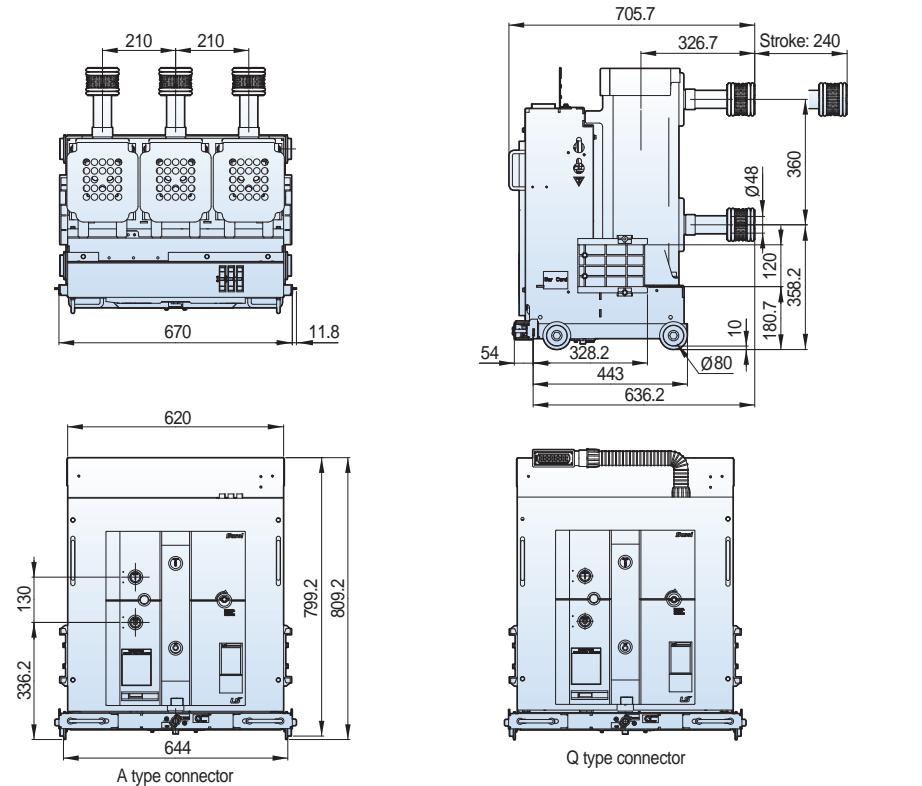

## Withdrawable


■ MCSG cradle T2 type, phase distance 210mm

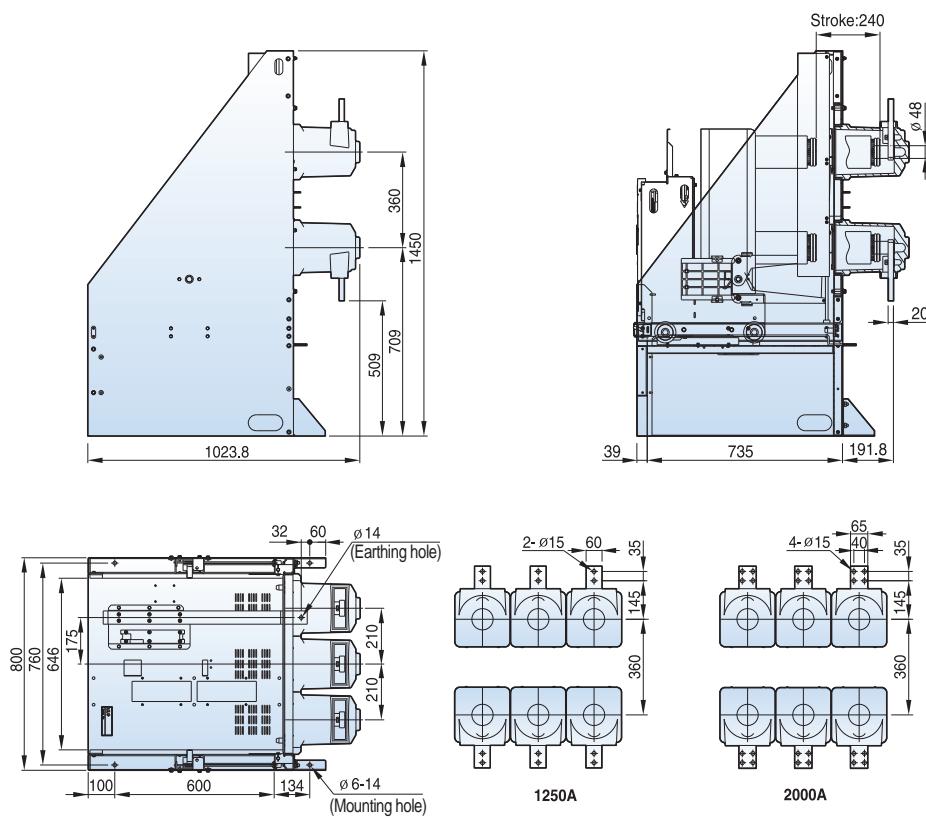

## 7.2/12kV, 31.5/40kA, 3150A


### Withdrawable

#### ■ K type unit, phase distance 210mm, G / T (T2) compatible

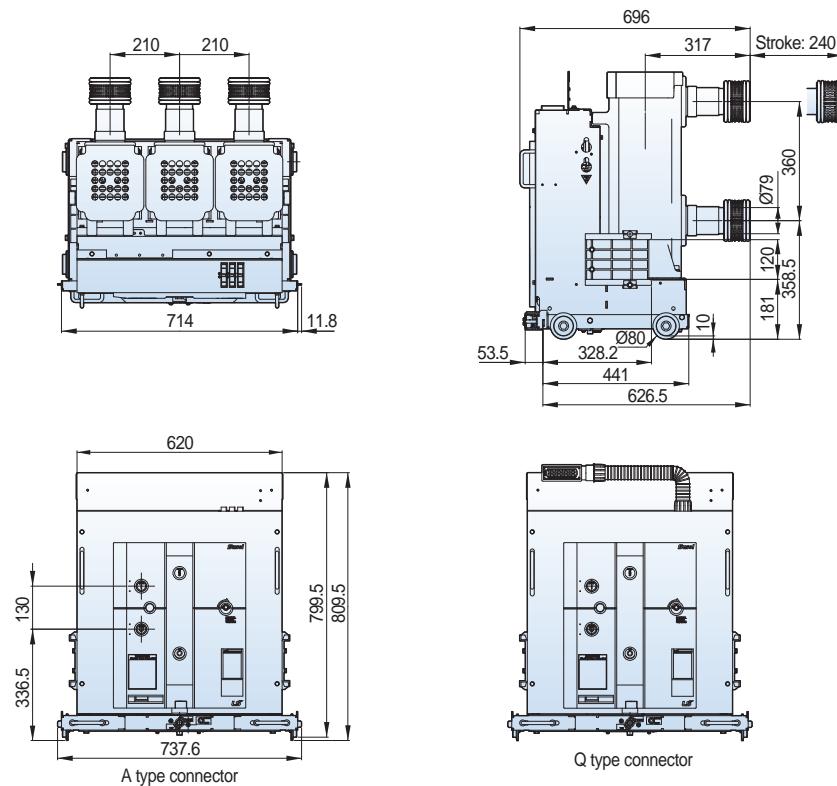

### Withdrawable

#### ■ MCSG cradle T2 type, phase distance 210mm

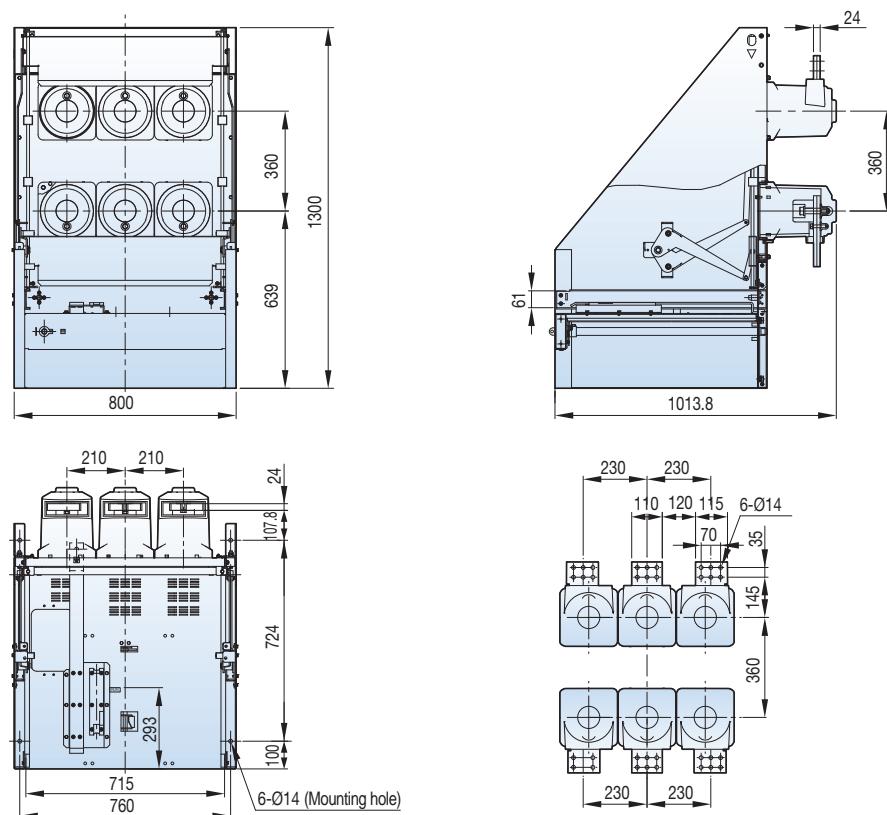


# Dimensions - VH type (VH-06/12/17/20/25/36)

**17.5kV, 40kA, 3150A**


## Withdrawable



■ K type unit, phase distance 254mm, G / T (T) compatible

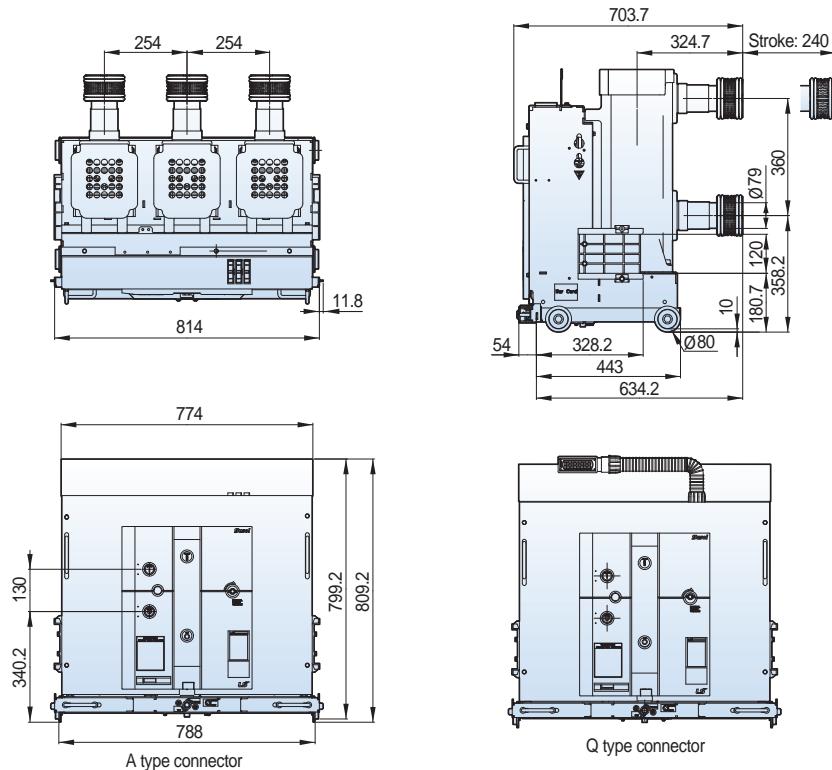

## Withdrawable

■ MCSG cradle T2 type, phase distance 254mm

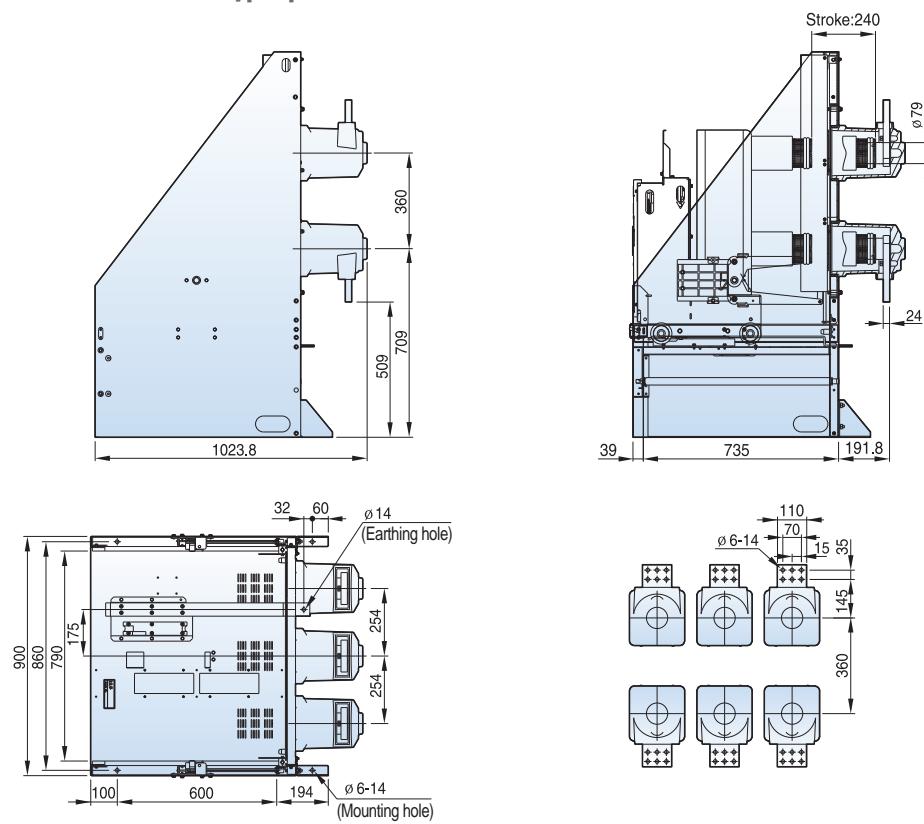

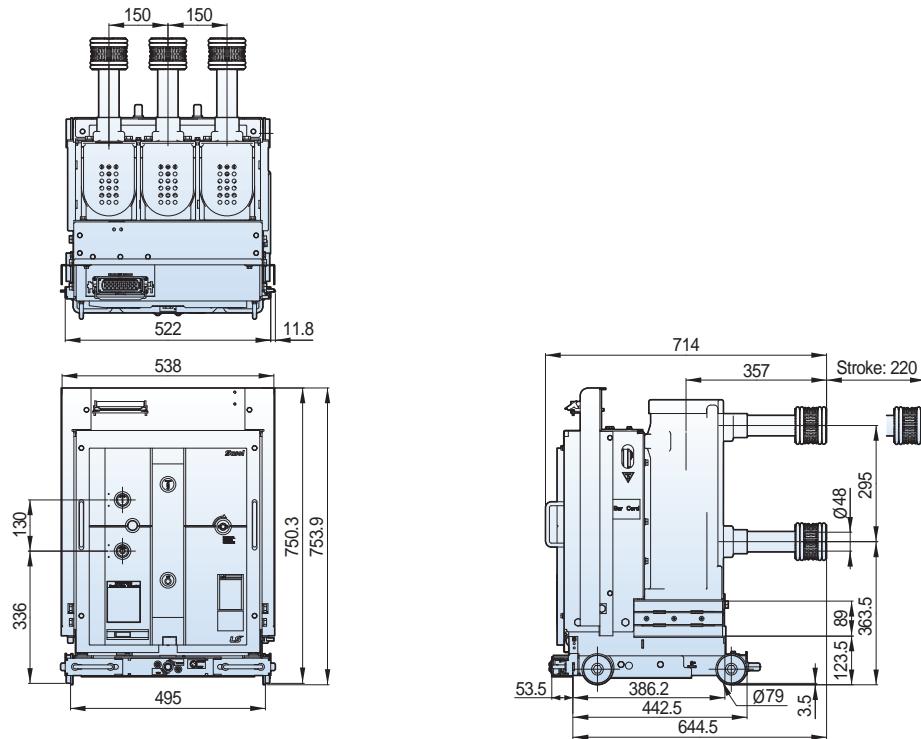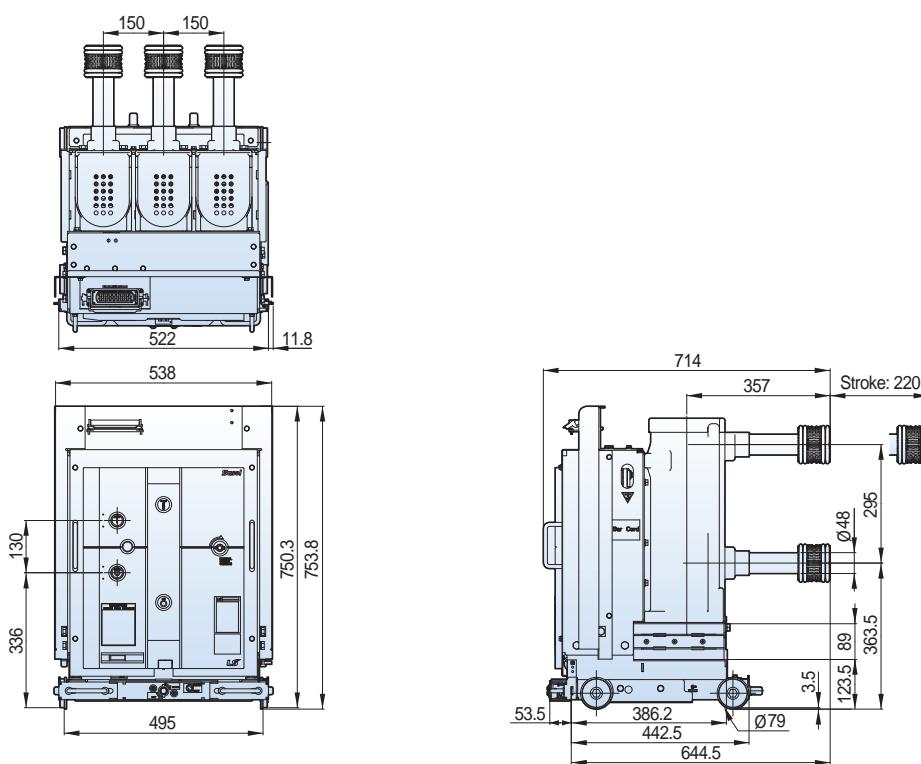**7.2/12kV, 40kA, 1250A****Withdrawable****■ H type unit, phase distance 150mm****7.2/12kV, 40kA, 2000A****Withdrawable****■ H type unit, phase distance 150mm**


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12kV, 40kA, 1250/2000A**


## Withdrawable

### ■ Ha cradle, phase distance 150mm

Type
VCH-06Ha40A13
VCH-06Ha40A20
VCH-12Ha40A13
VCH-12Ha40A20

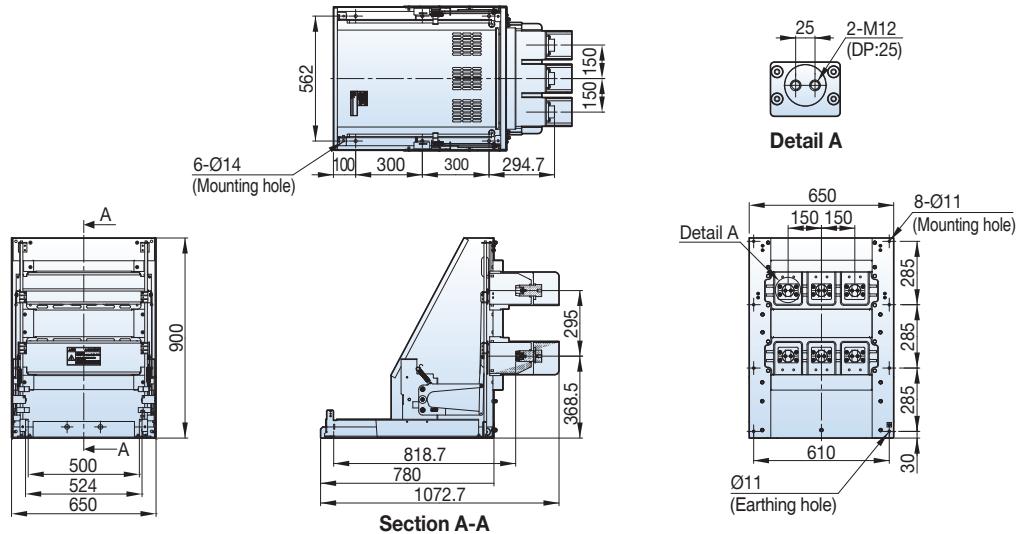


### ■ Ha cradle, phase distance 150mm (Earthing S/W Option type)

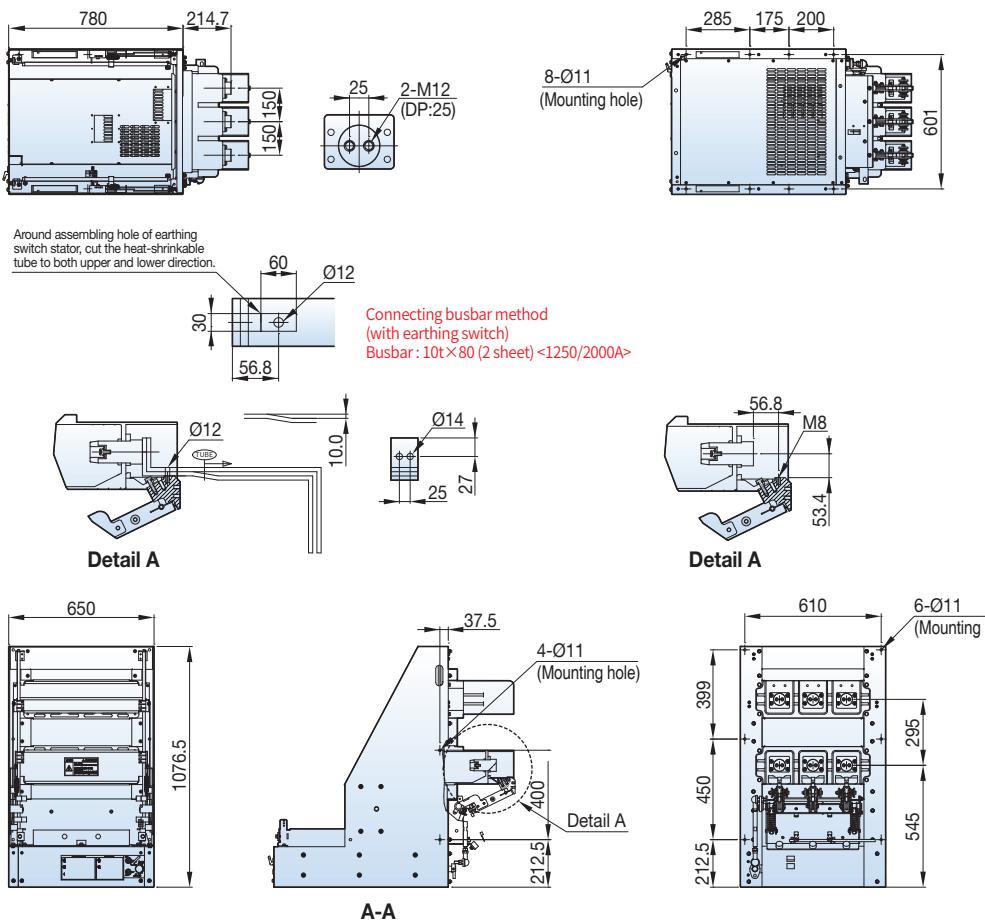

## 7.2/12kV, 40kA, 1250/2000A

**Withdrawable**

■ H cradle, phase distance 150mm

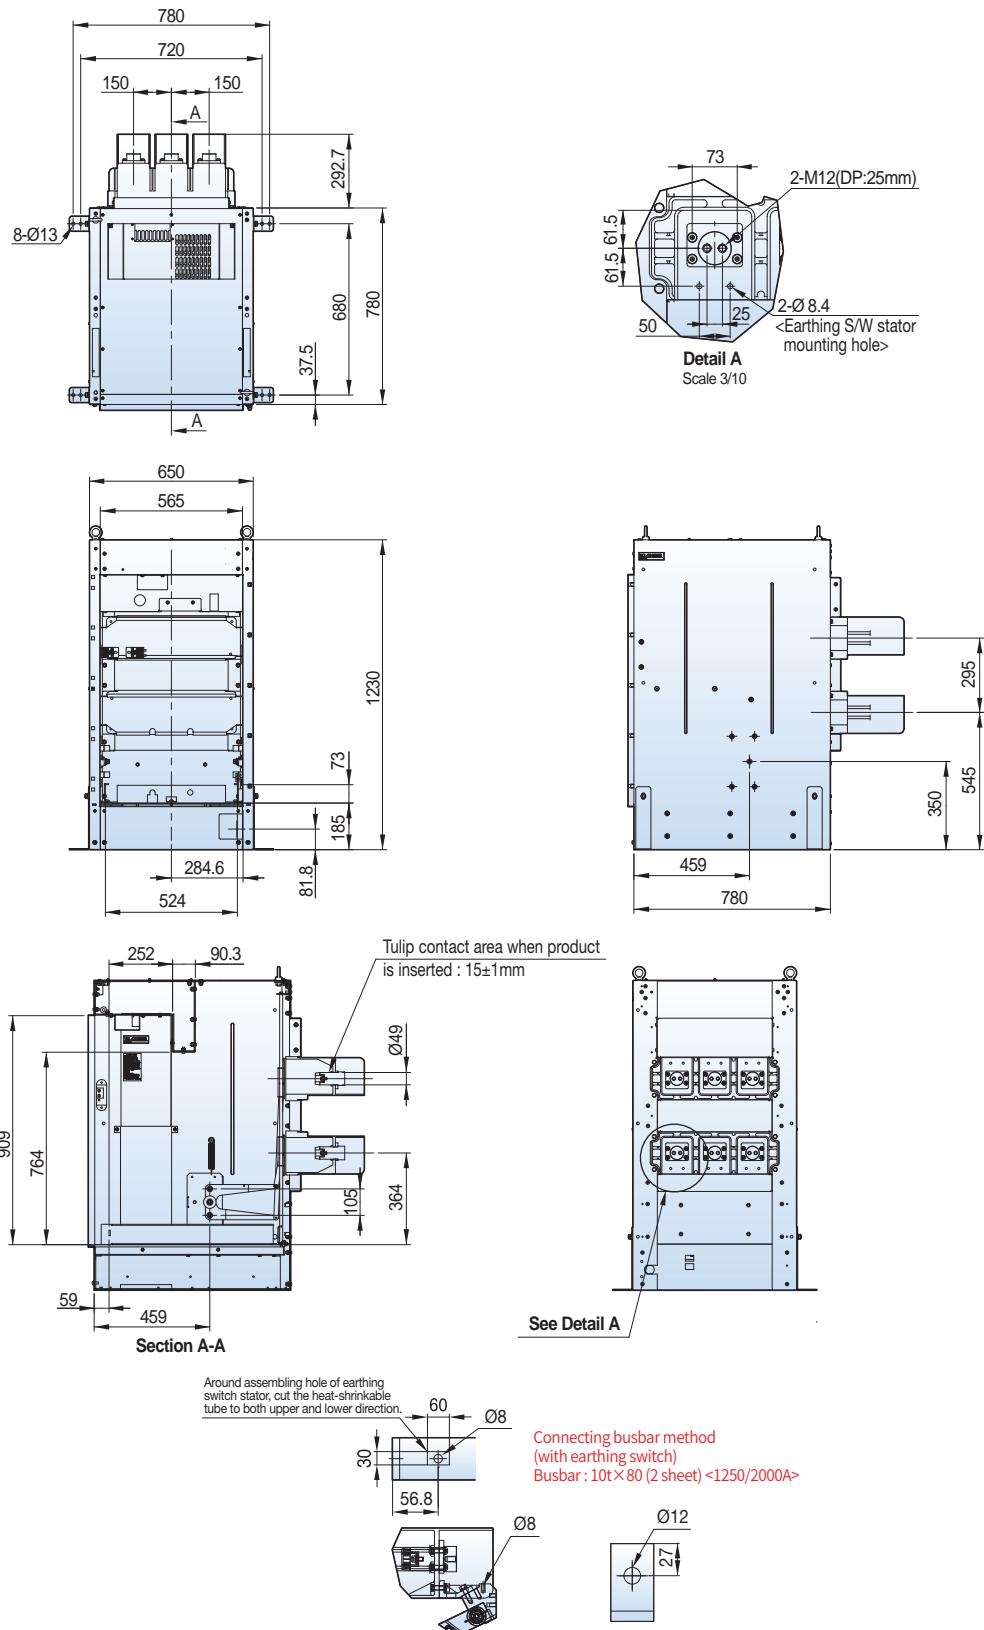


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 40kA, 1250/2000A**

**Withdrawable**


■ H type unit, phase distance 210mm

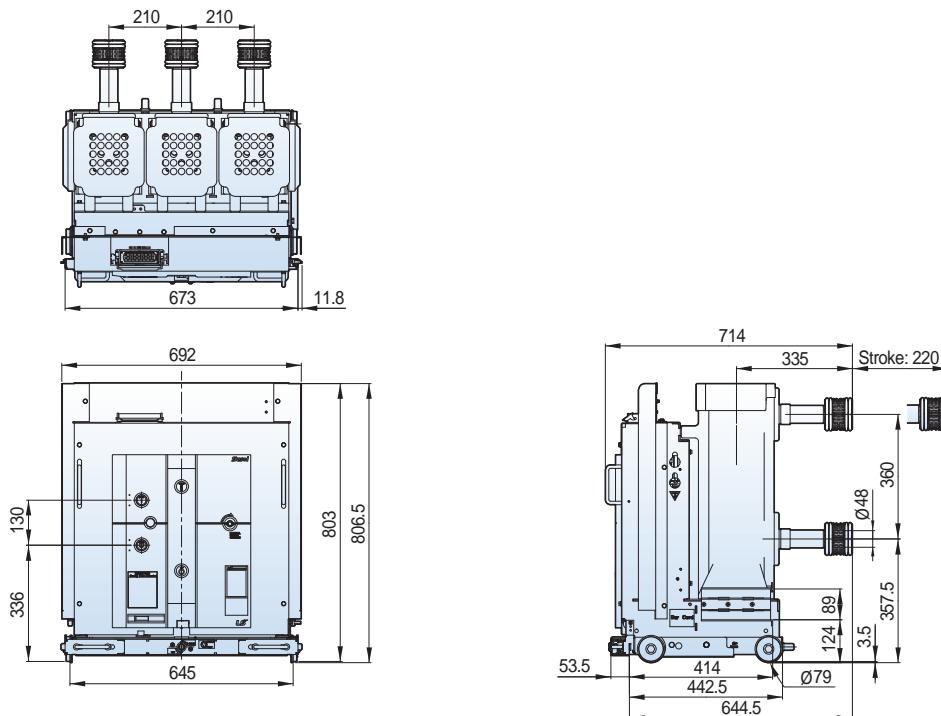

**7.2/12/17.5kV, 31.5/40kA, 3150A**

**Withdrawable**


■ H type unit, phase distance 210mm

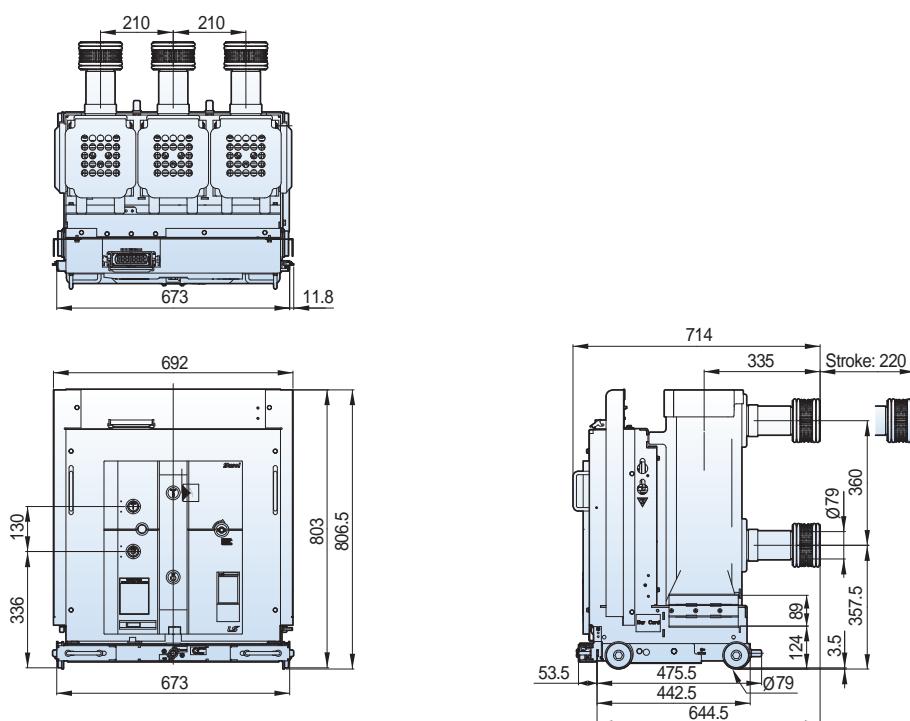

## 7.2/12/17.5kV, 40kA, 1250/2000A

### Withdrawable

#### H cradle, phase distance 210mm

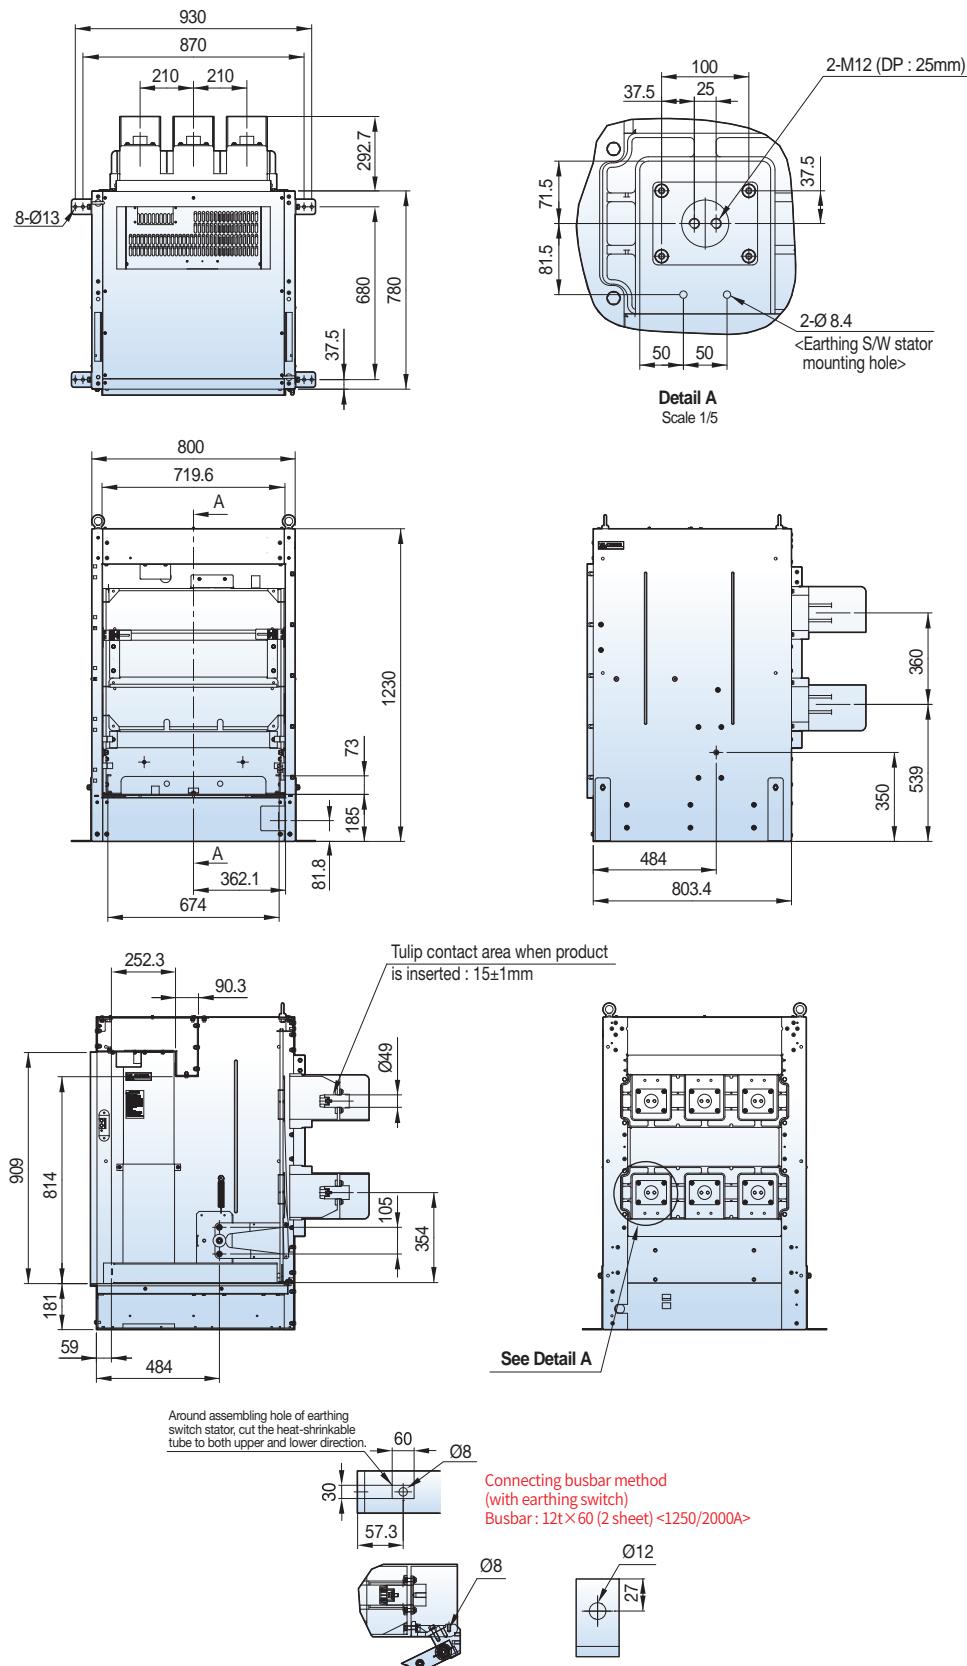



# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 31.5/40kA, 3150A**

## Withdrawable

■ H cradle, phase distance 210mm


Type
VCH-06Ha32B32
VCH-06Ha40B32
VCH-12Ha32B32
VCH-12Ha40B32
VCH-17Ha32B32
VCH-17Ha40B32

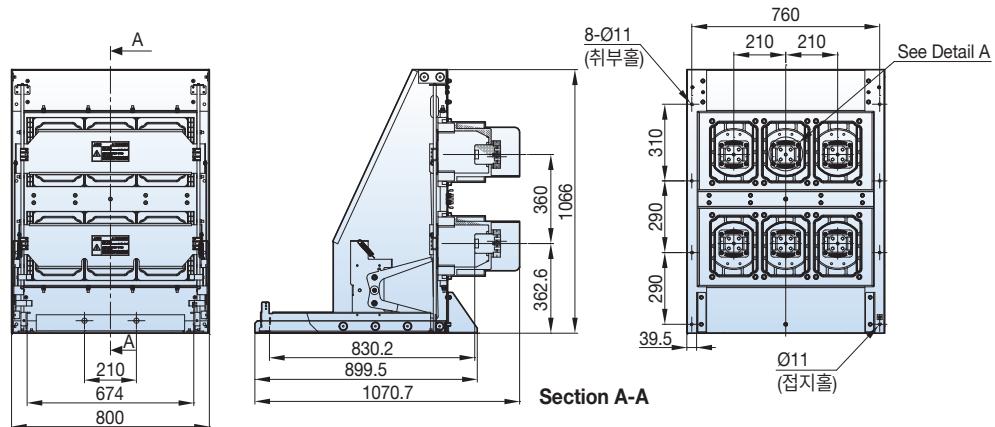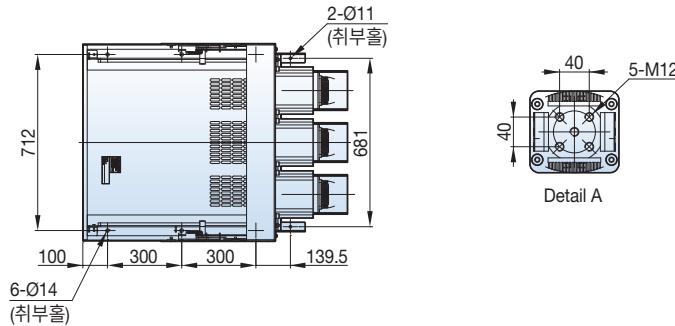

## 7.2/12/17.5kV, 31.5/40kA, 3150A

### Withdrawable

#### H cradle, phase distance 210mm

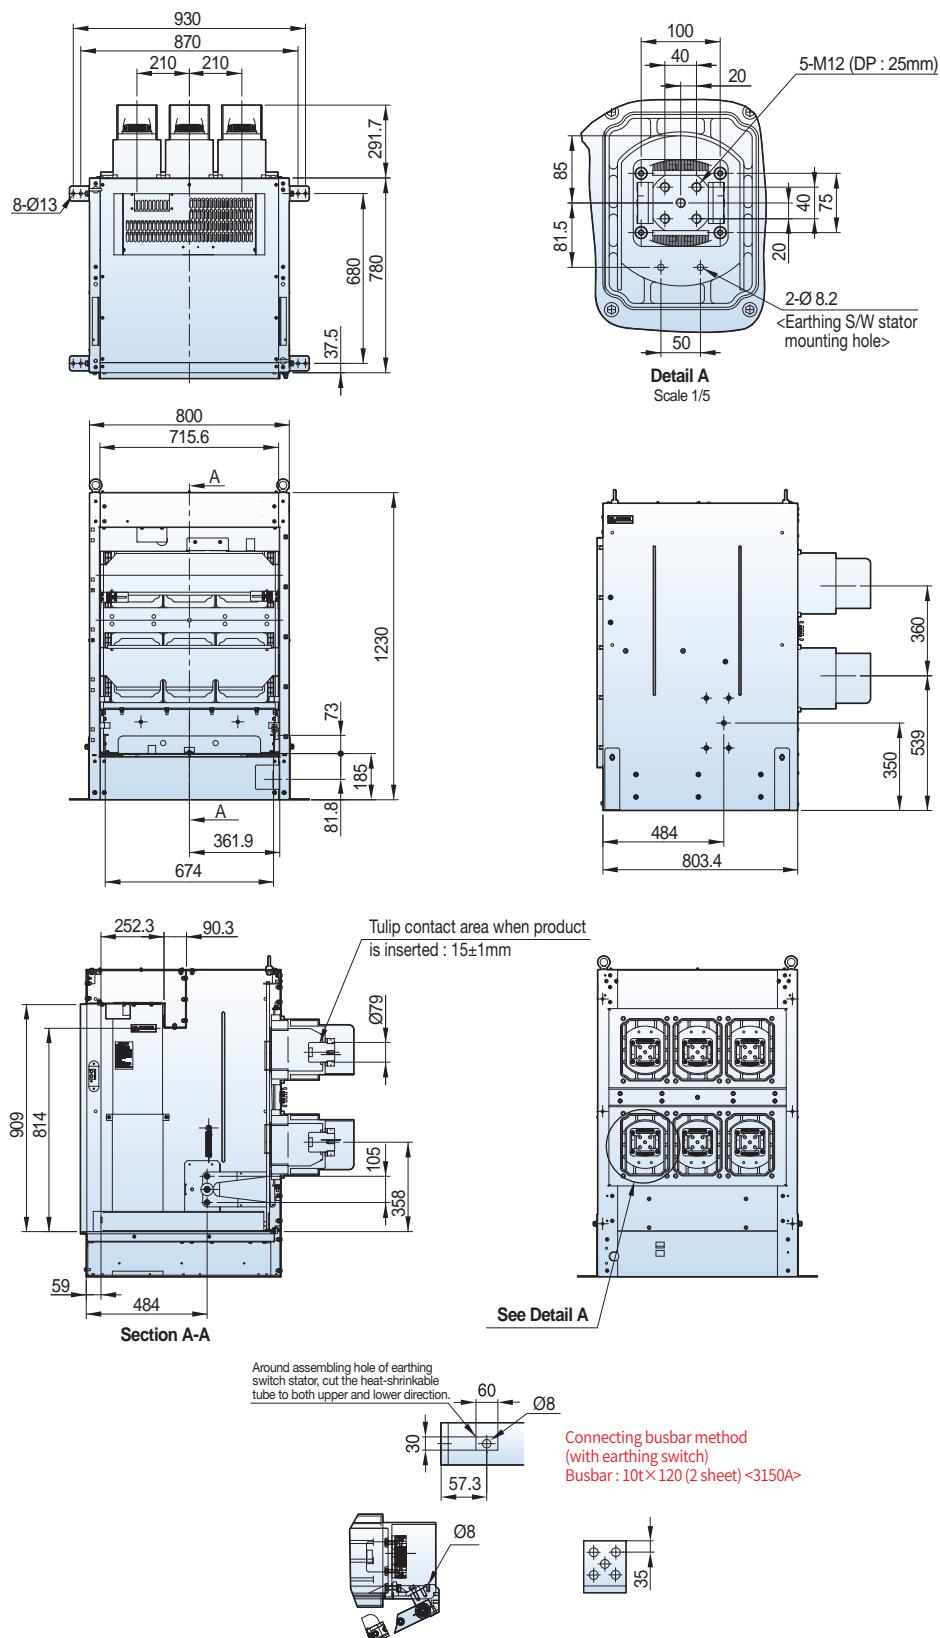


# Dimensions - VH type (VH-06/12/17/20/25/36)

**17.5kV, 31.5/40kA, 3150A**

**Withdrawable**


■ H type unit, phase distance 275mm

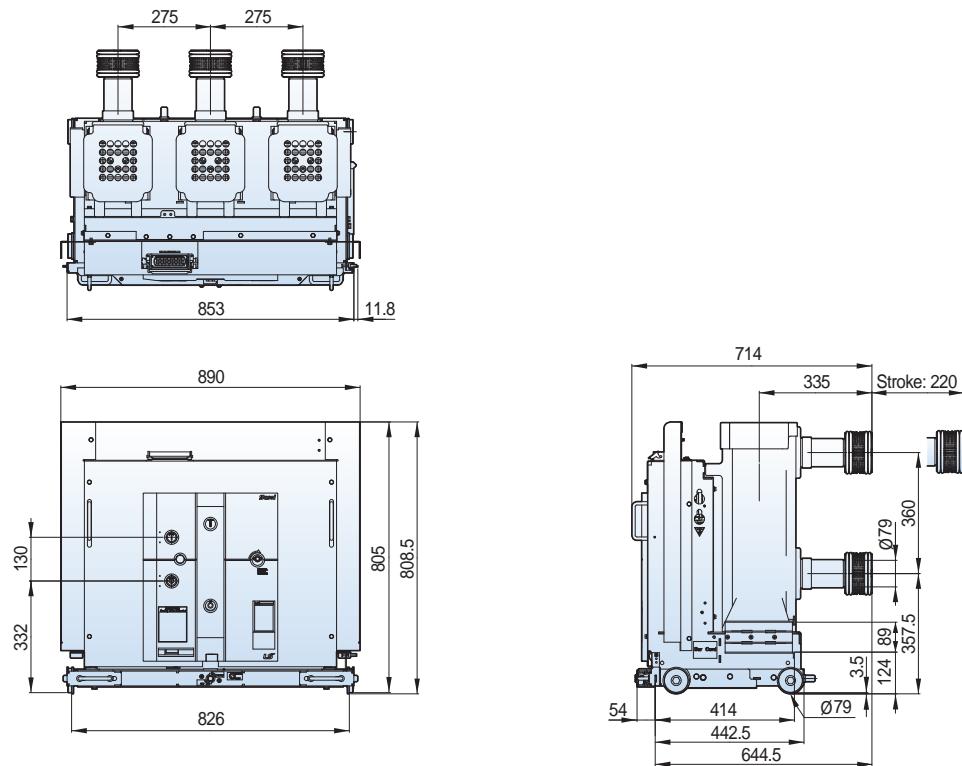

## 17.5kV, 31.5/40kA, 3150A

**Withdrawable**

■ H cradle, phase distance 275mm

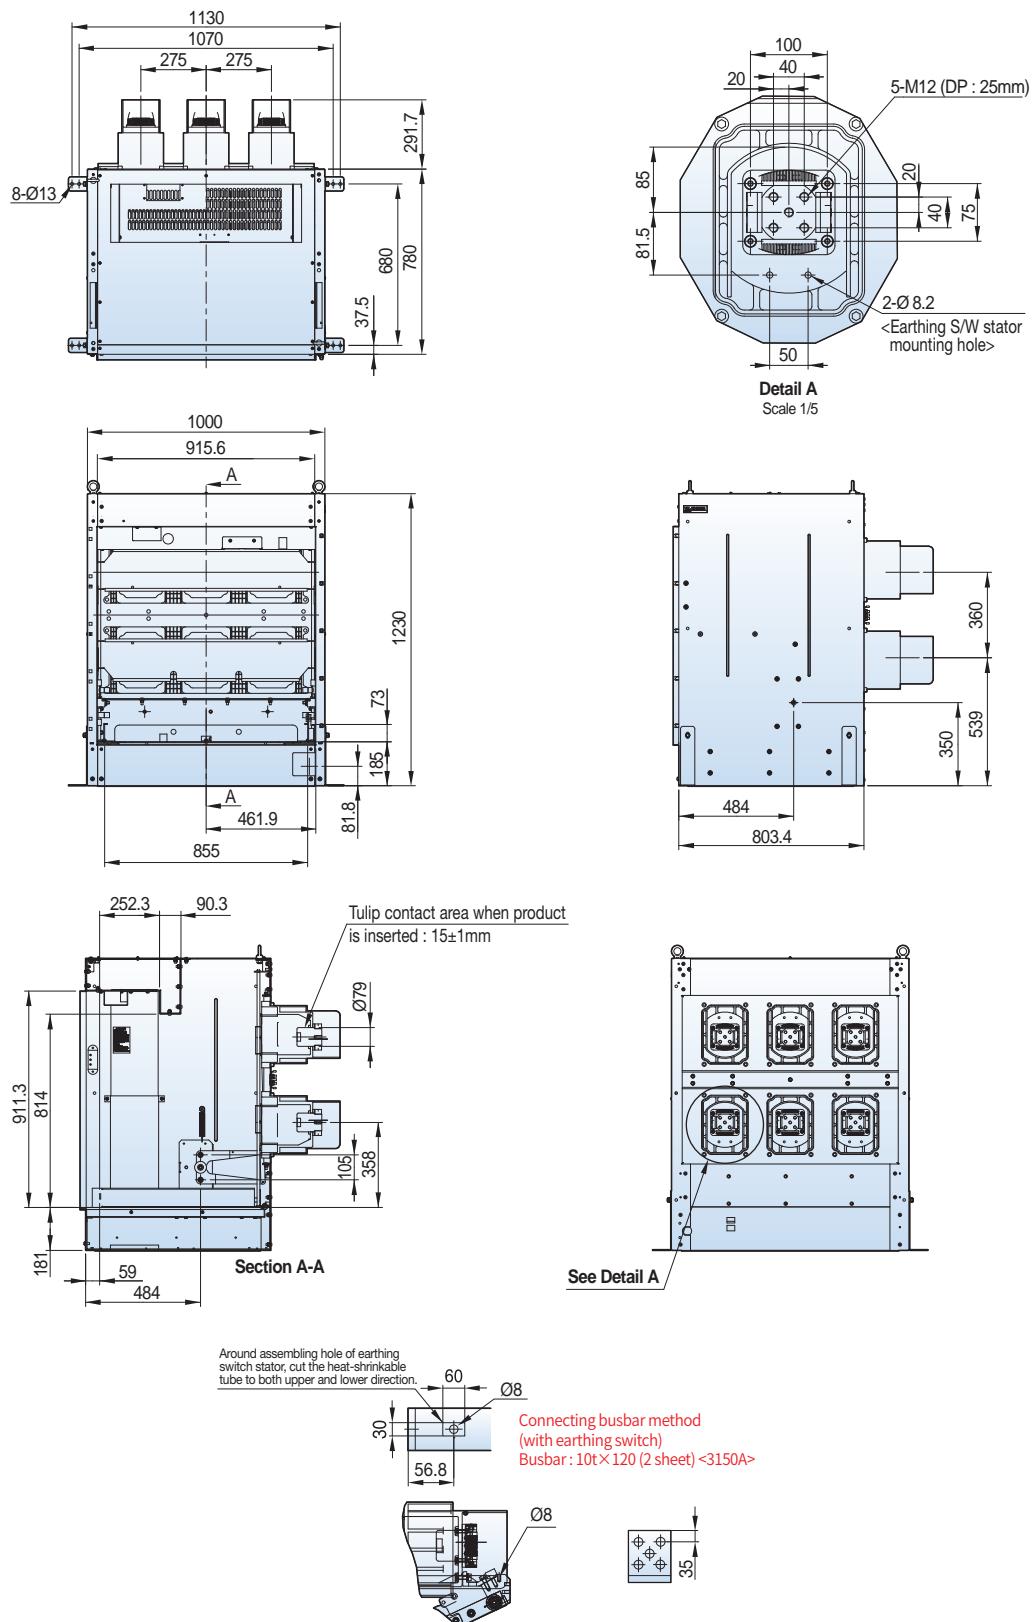


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 50kA, 1250/2000A**


## Fixed

### ■ P type, phase distance 210mm

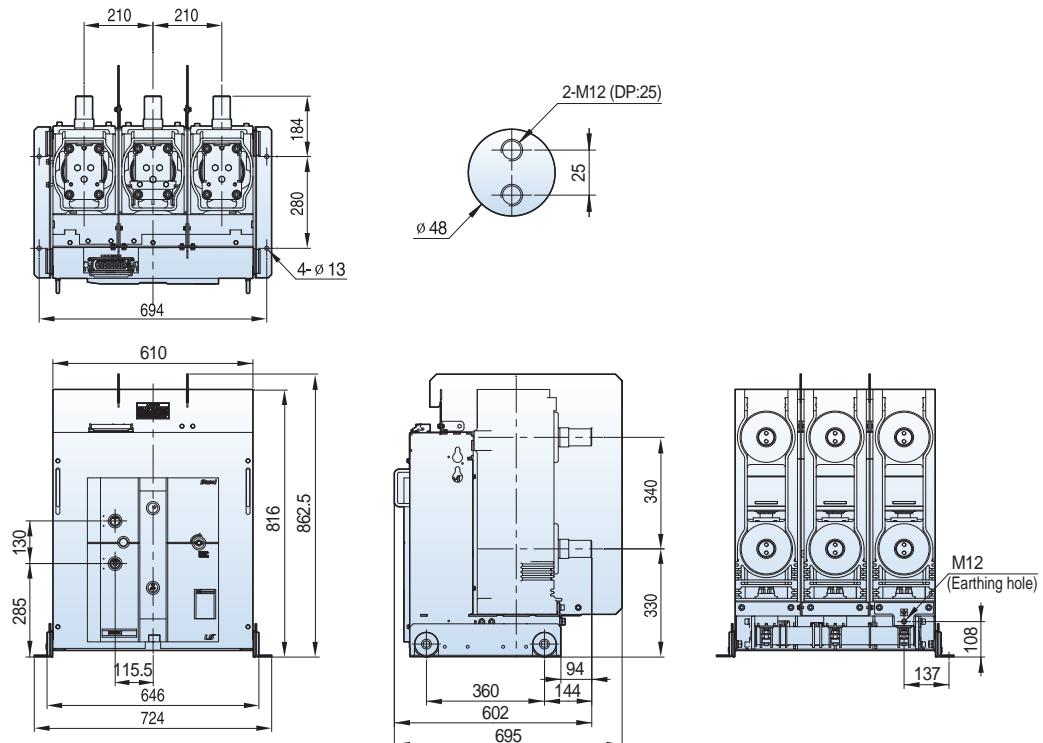

## Withdrawable


### ■ H type unit, phase distance 210mm

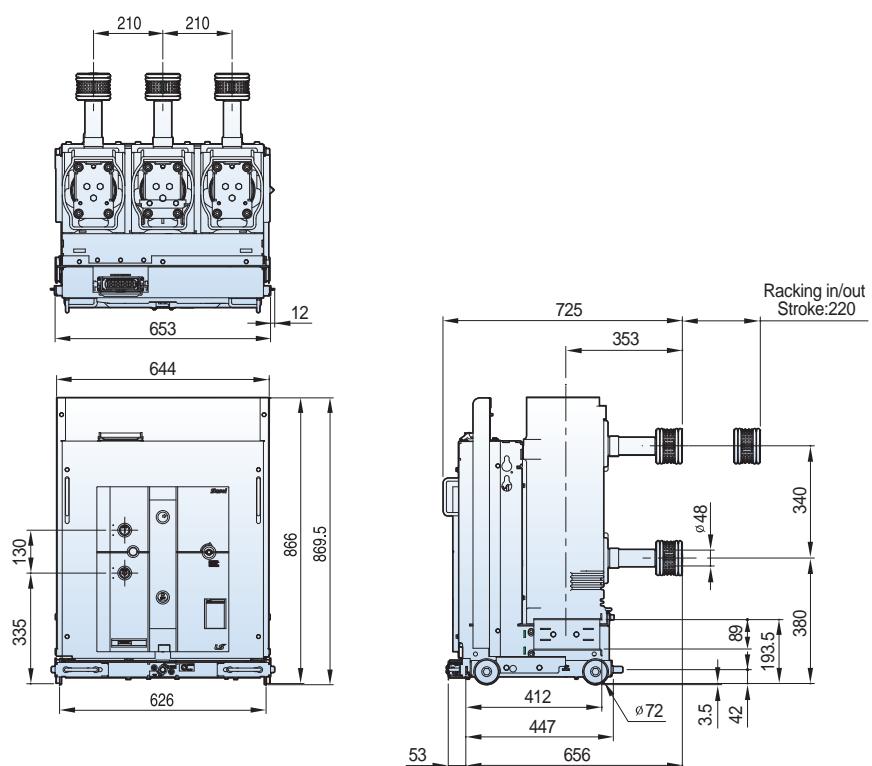

## 7.2/12/17.5kV, 50kA, 1250/2000A

### Withdrawable

#### H cradle, phase distance 210mm

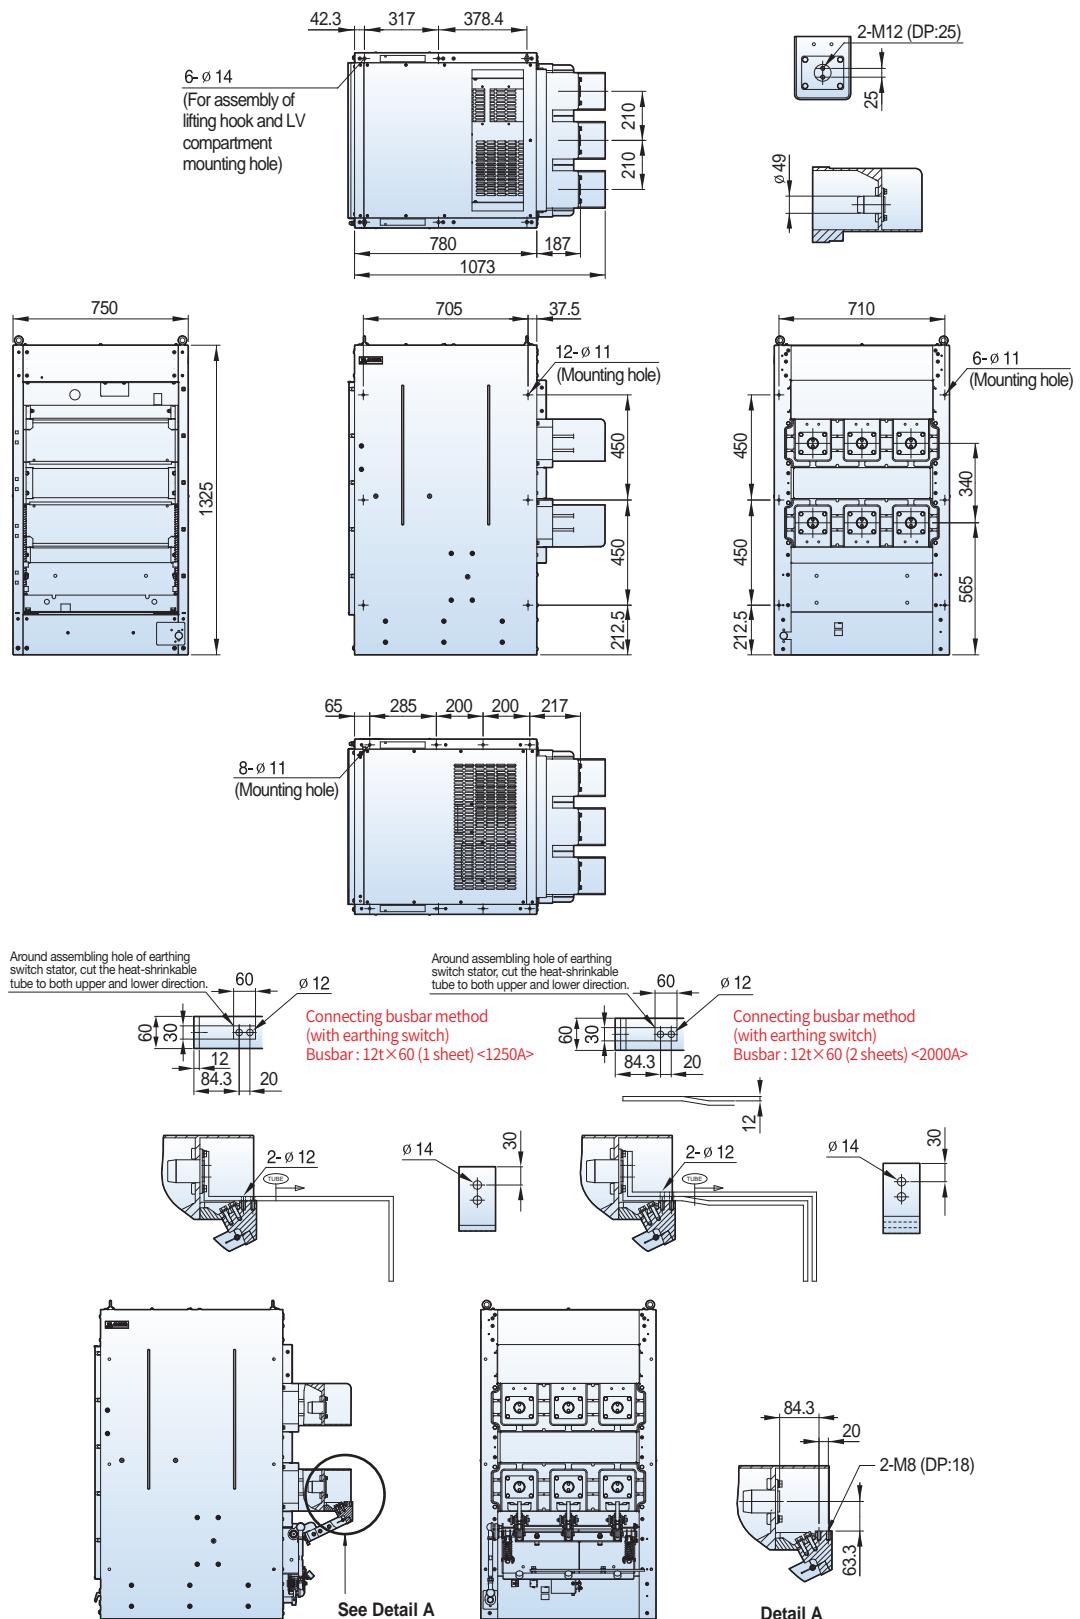


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 50kA, 2500/3150A**


## Fixed

■ P type, phase distance 275mm

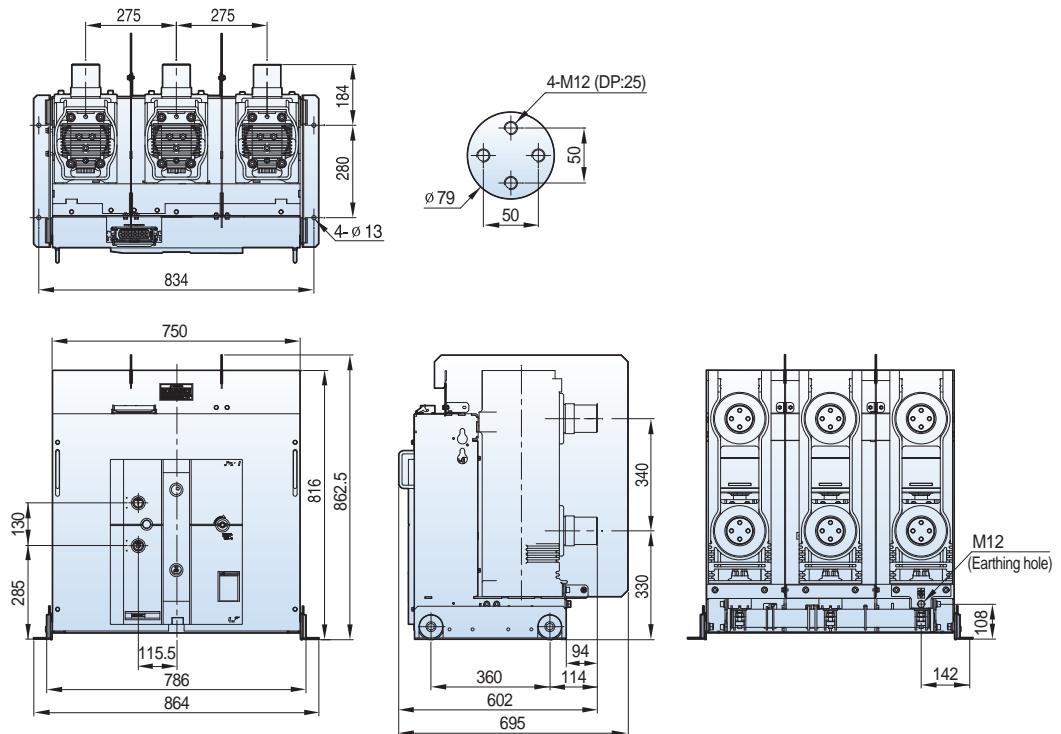

## Withdrawable


■ H type unit, phase distance 275mm

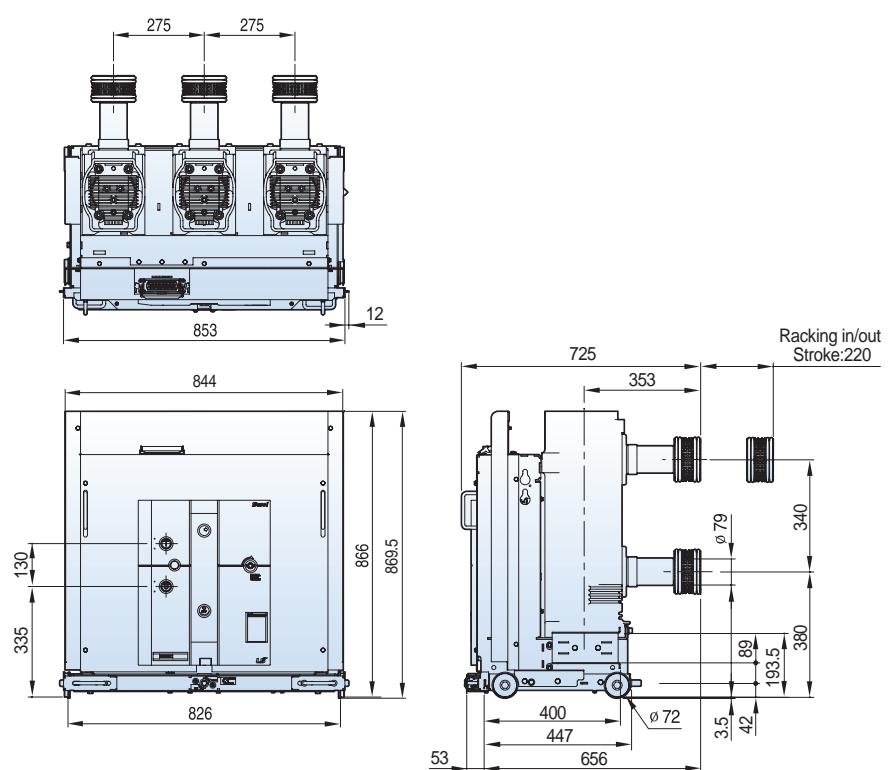

## 7.2/12/17.5kV, 50kA, 2500/3150A

### Withdrawable

#### H cradle, phase distance 275mm

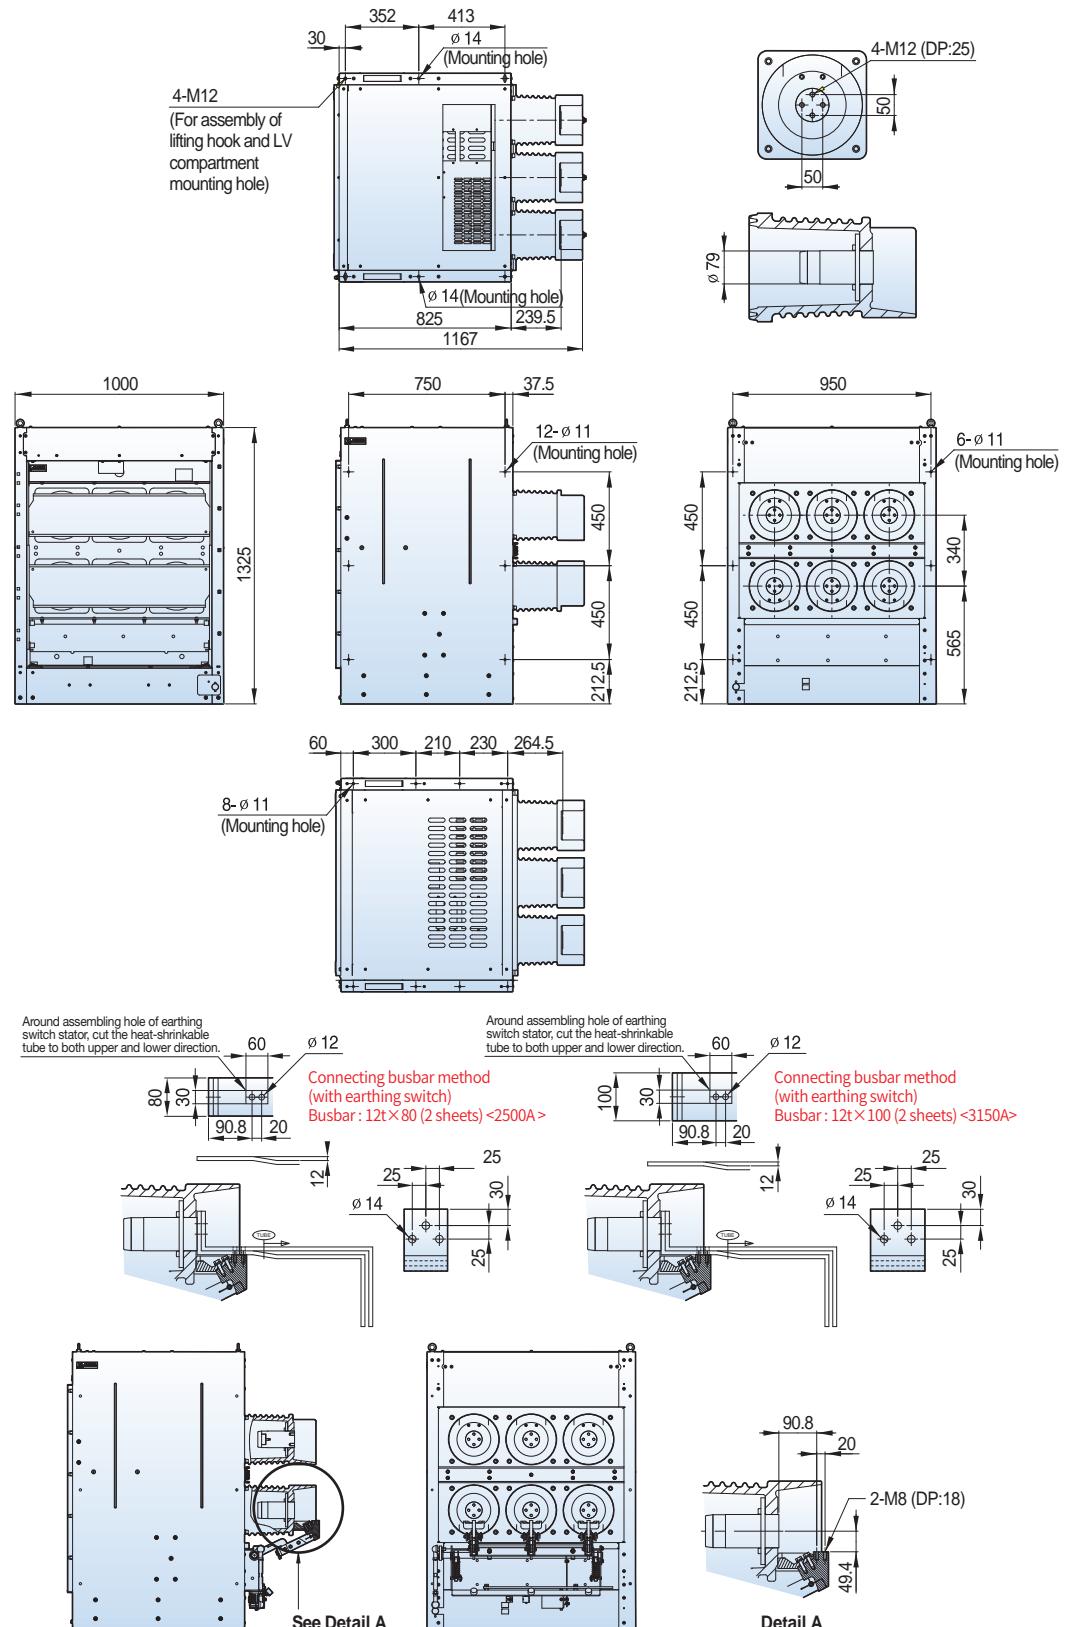


# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 40/50kA, 4000A**


## Fixed

■ P type, phase distance 275mm

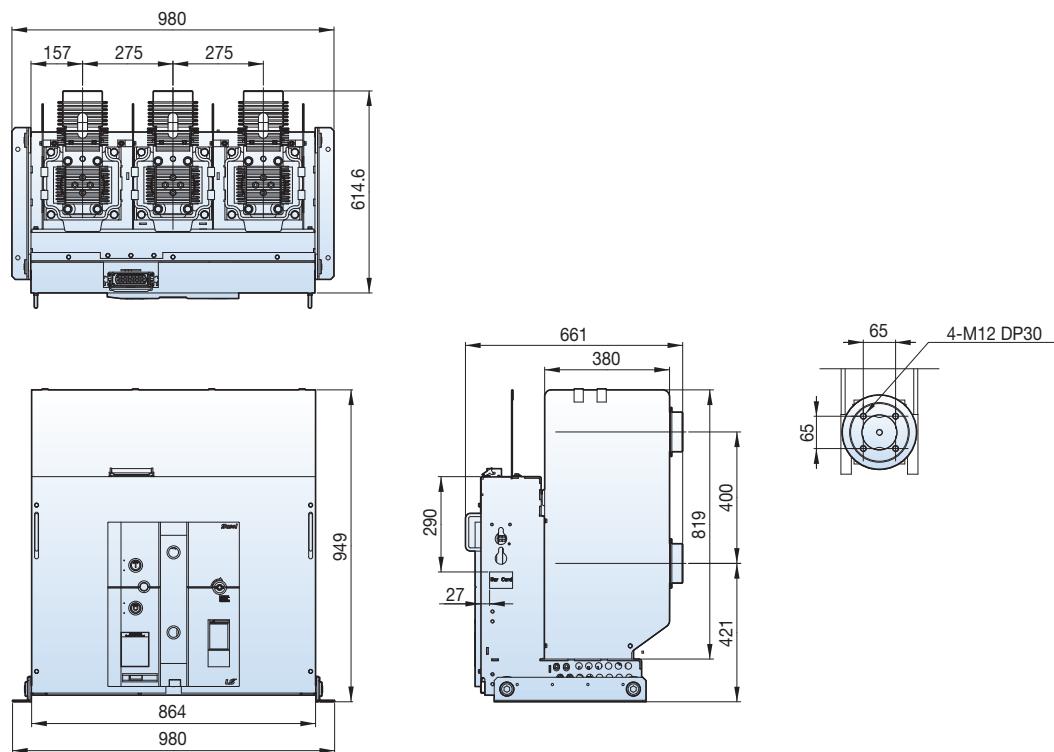

## Withdrawable


■ H type unit, phase distance 275mm

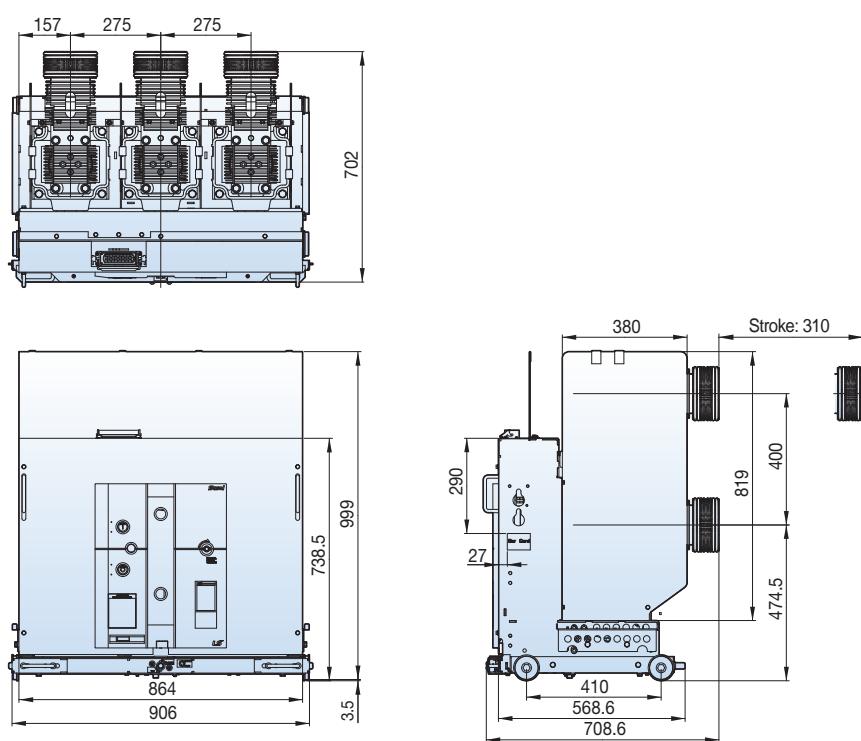

## 7.2/12/17.5kV, 40/50kA, 4000A

**Withdrawable**

■ Ha type cradle, phase distance 275mm, Normal Type

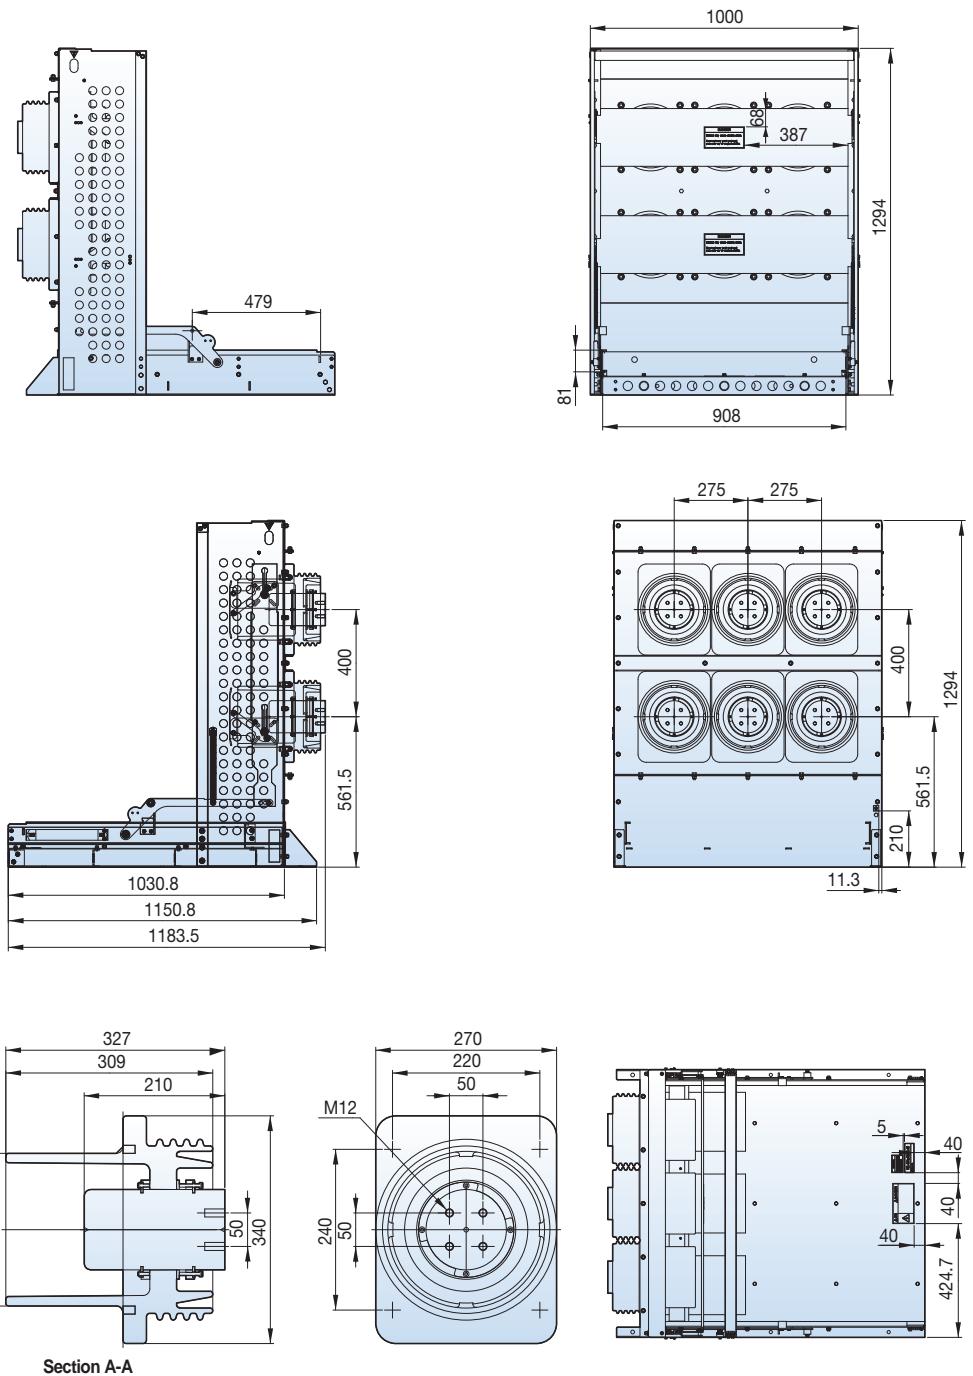



# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12/17.5kV, 40/50kA, 4000A**

## Withdrawable

■ Ha type cradle, phase distance 275mm, with Earthing Switch  
(The same applies to MOC or TOC)

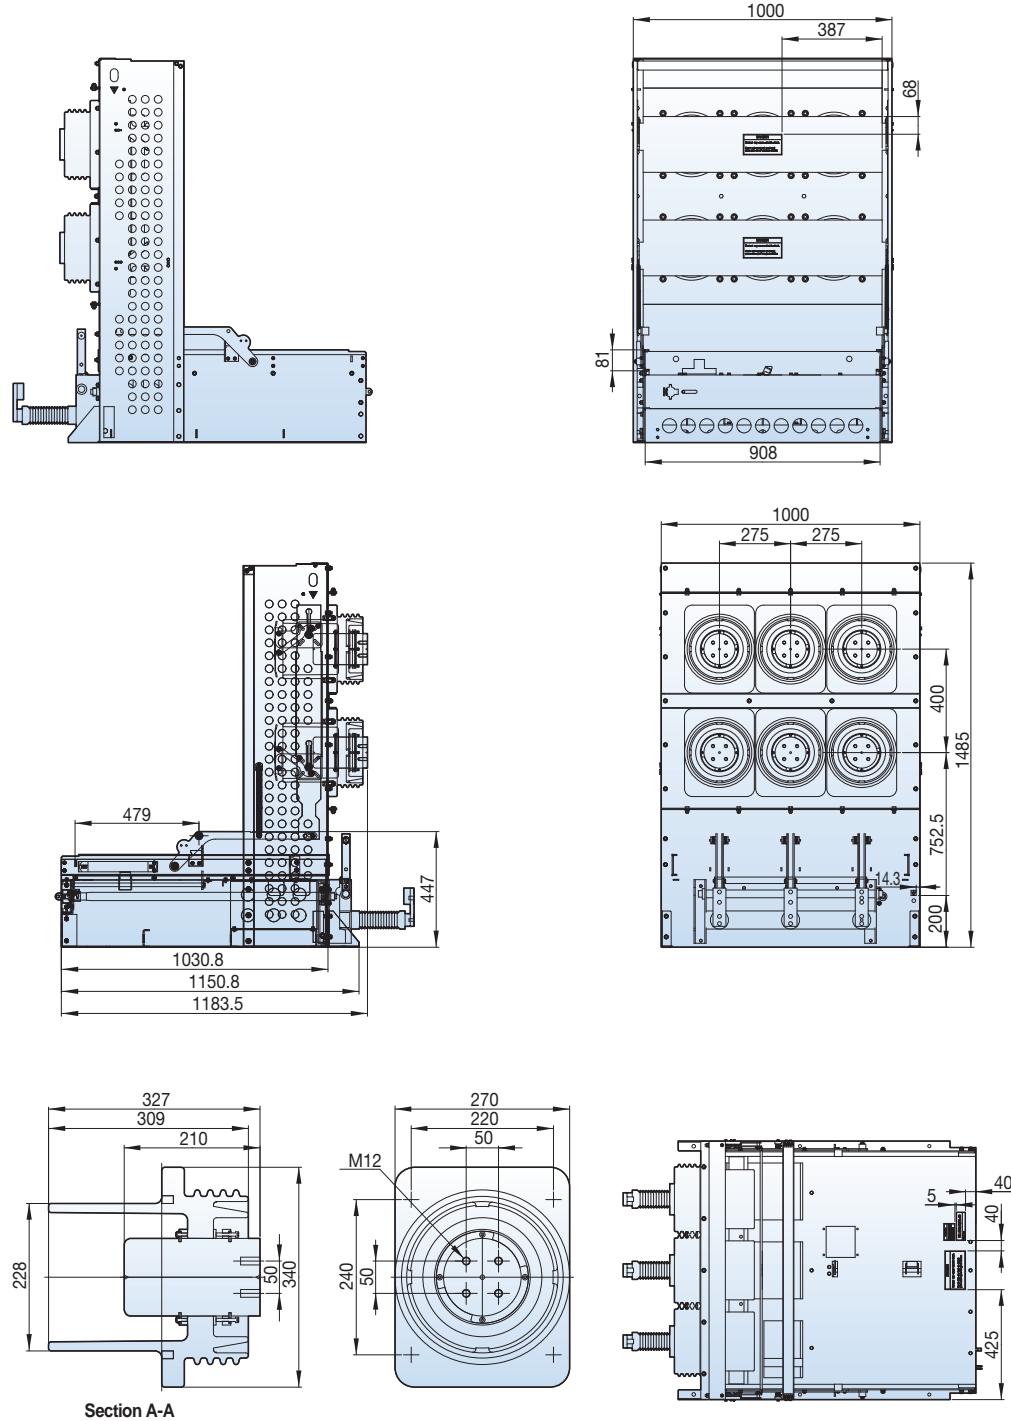

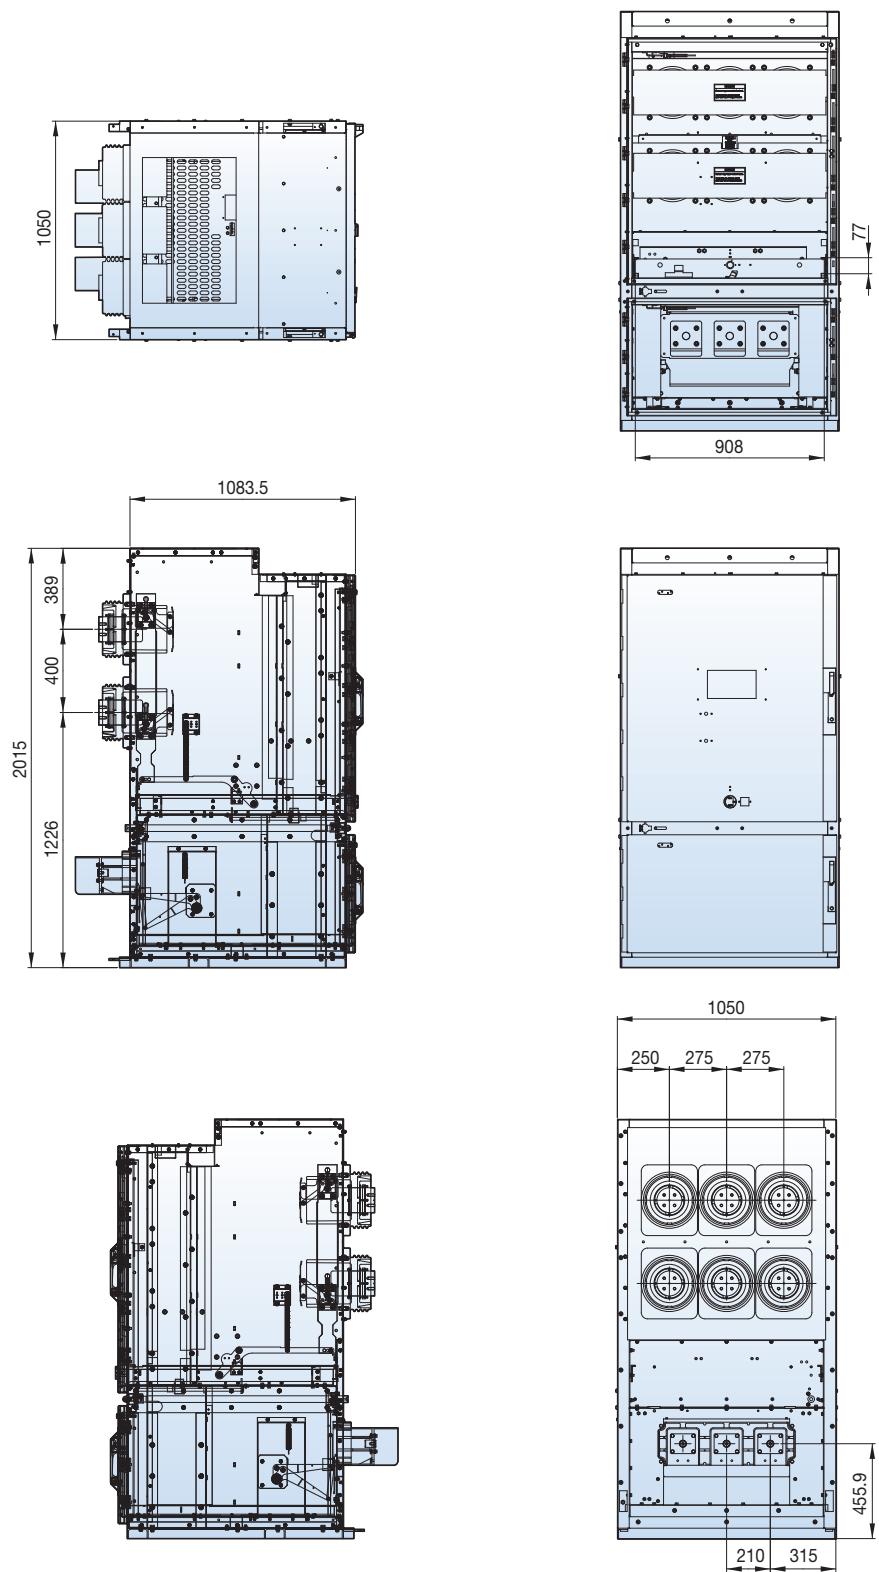
**7.2/12/17.5kV, 40/50kA, 4000A****Withdrawable****■ Hb type cradle, phase distance 275mm**

# Dimensions - VH type (VH-06/12/17/20/25/36)

**7.2/12kV, 40/50kA, 5000A**


**Withdrawable**

■ H type unit, phase distance 320mm

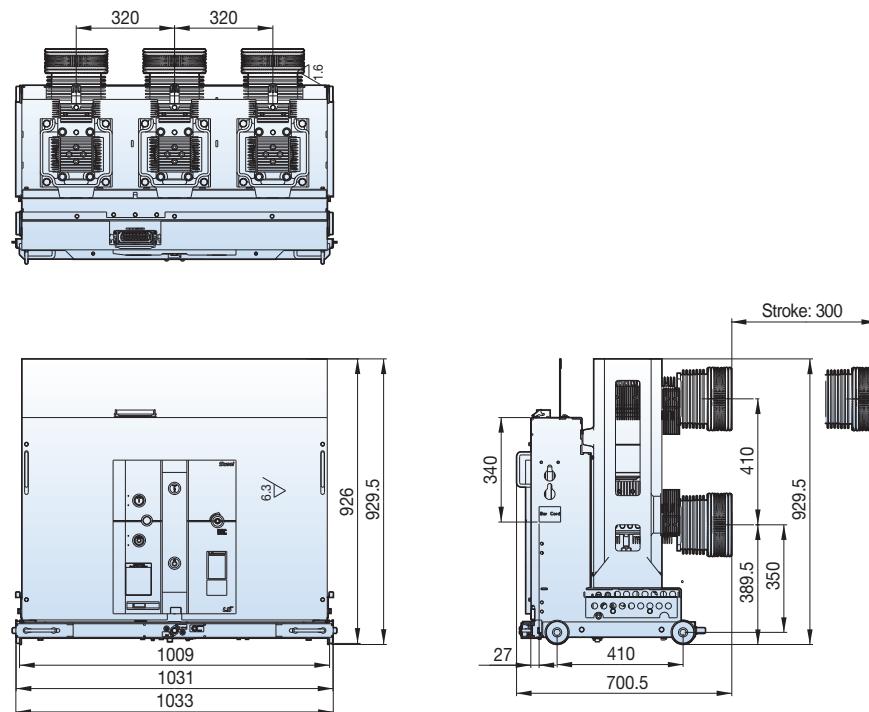

**Withdrawable**


■ Ha type cradle, phase distance 320mm, Normal Type

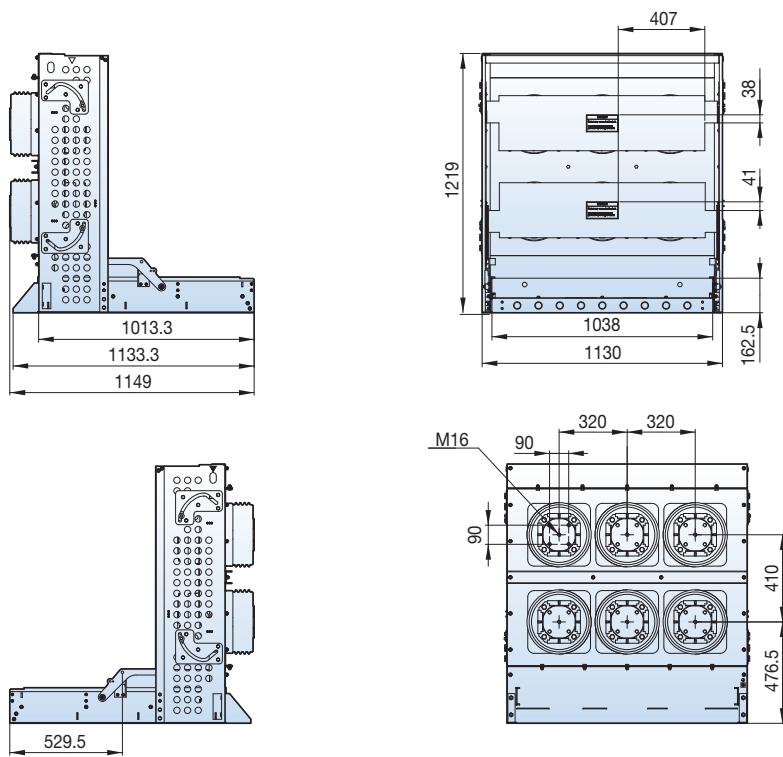

## 7.2/12kV, 40/50kA, 5000A

### Withdrawable

■ Ha type cradle, phase distance 320mm, with Earthing Switch  
(The same applies to MOC or TOC)

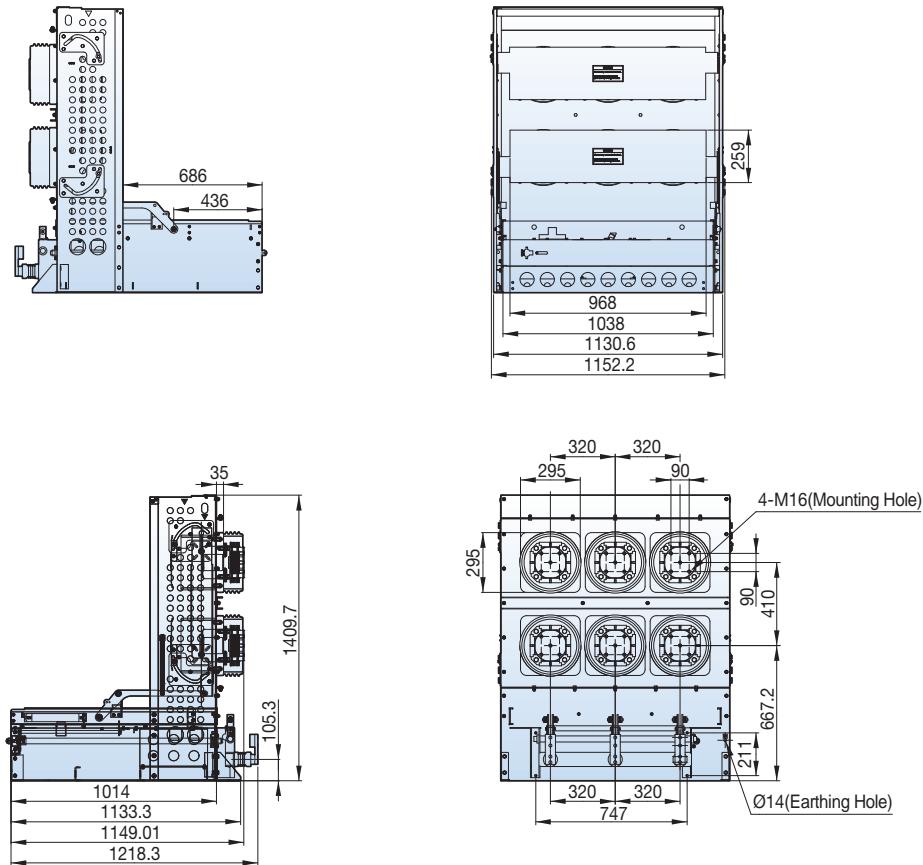


# Dimensions - VH type (VH-06/12/17/20/25/36)

**24kV, 25kA, 2500A**


**Fixed**

■ P type, phase distance 275mm

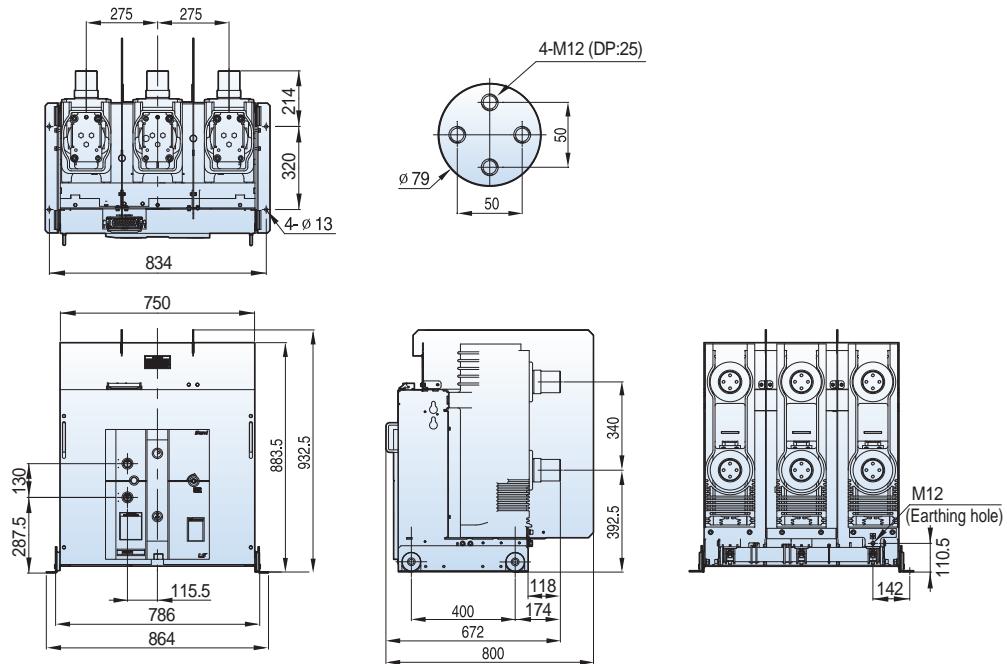

**Withdrawable**


■ H type unit, phase distance 275mm

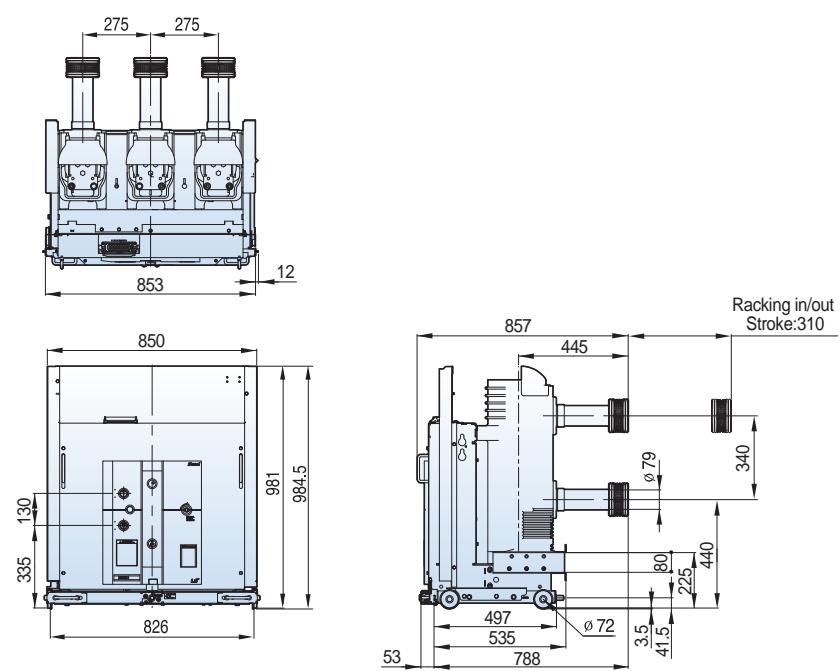

## 24kV, 25kA, 2500A

**Withdrawable**

### H cradle, phase distance 275mm

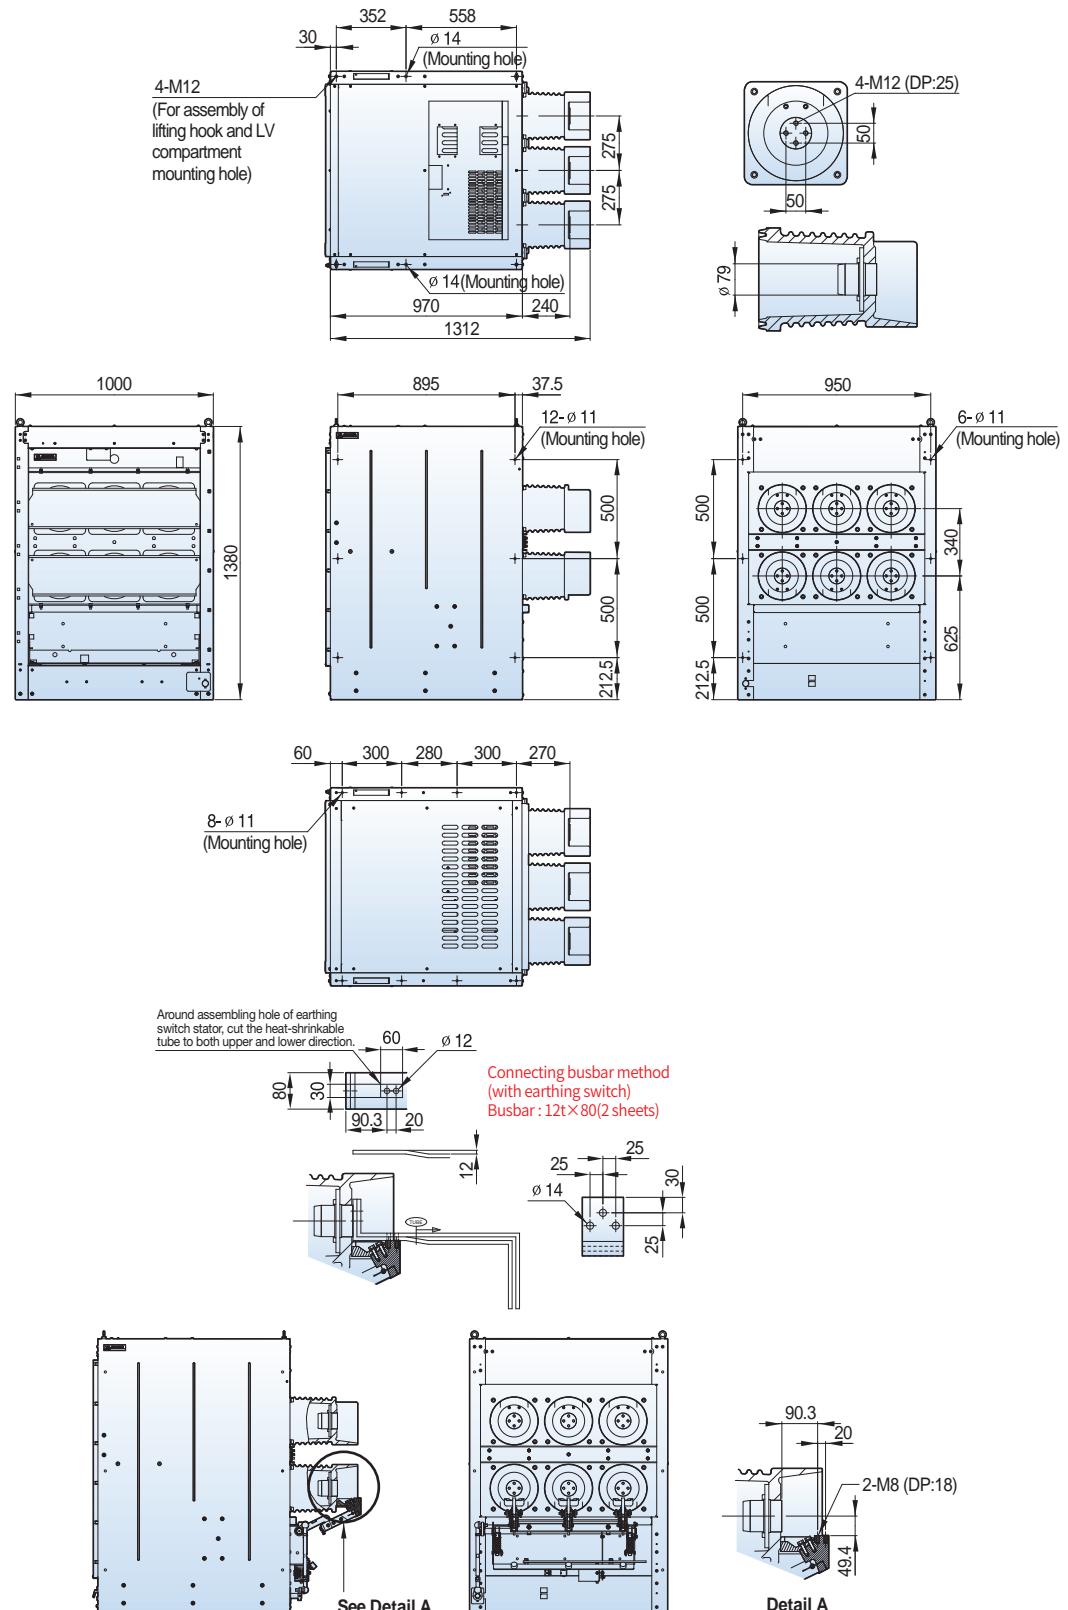


# Dimensions - VH type (VH-06/12/17/20/25/36)

**24kV, 31.5/40kA, 1250/2000A**


## Fixed


■ P type, phase distance 210mm

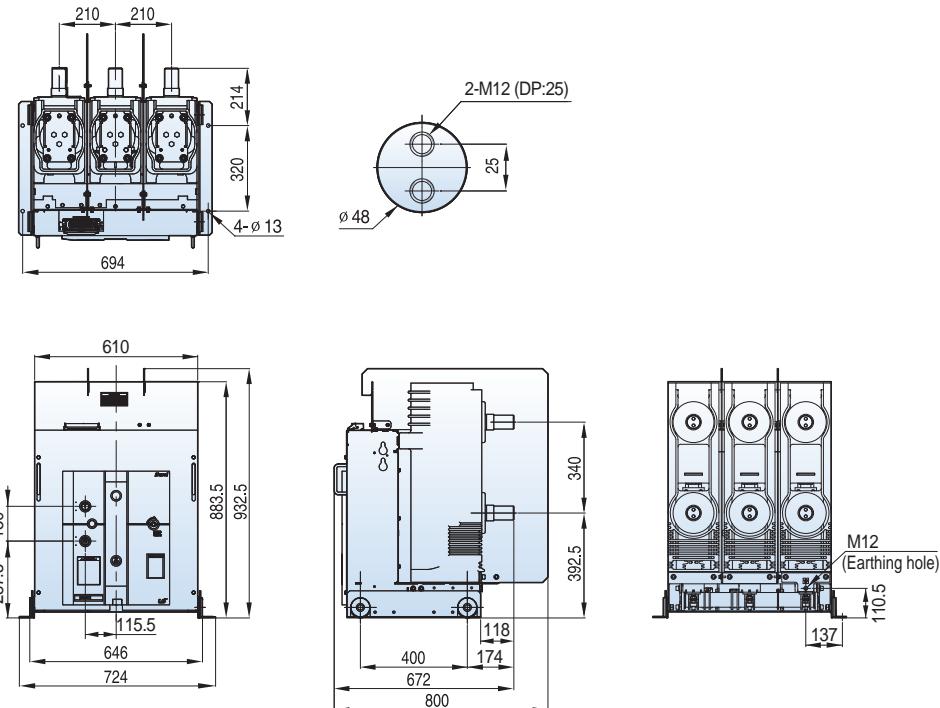

## Withdrawable

■ H type unit, phase distance 210mm

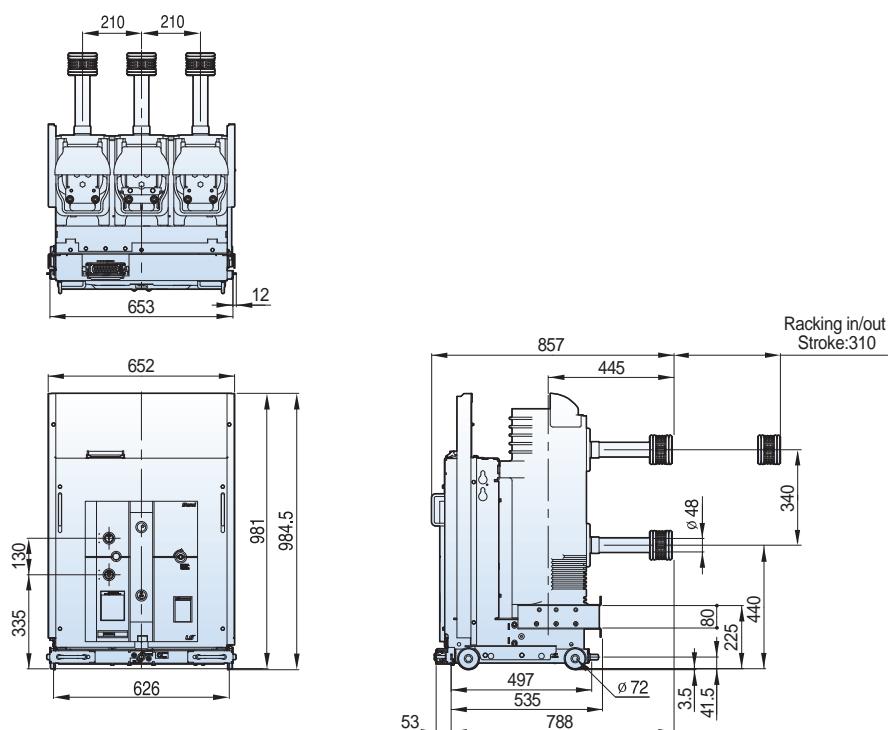

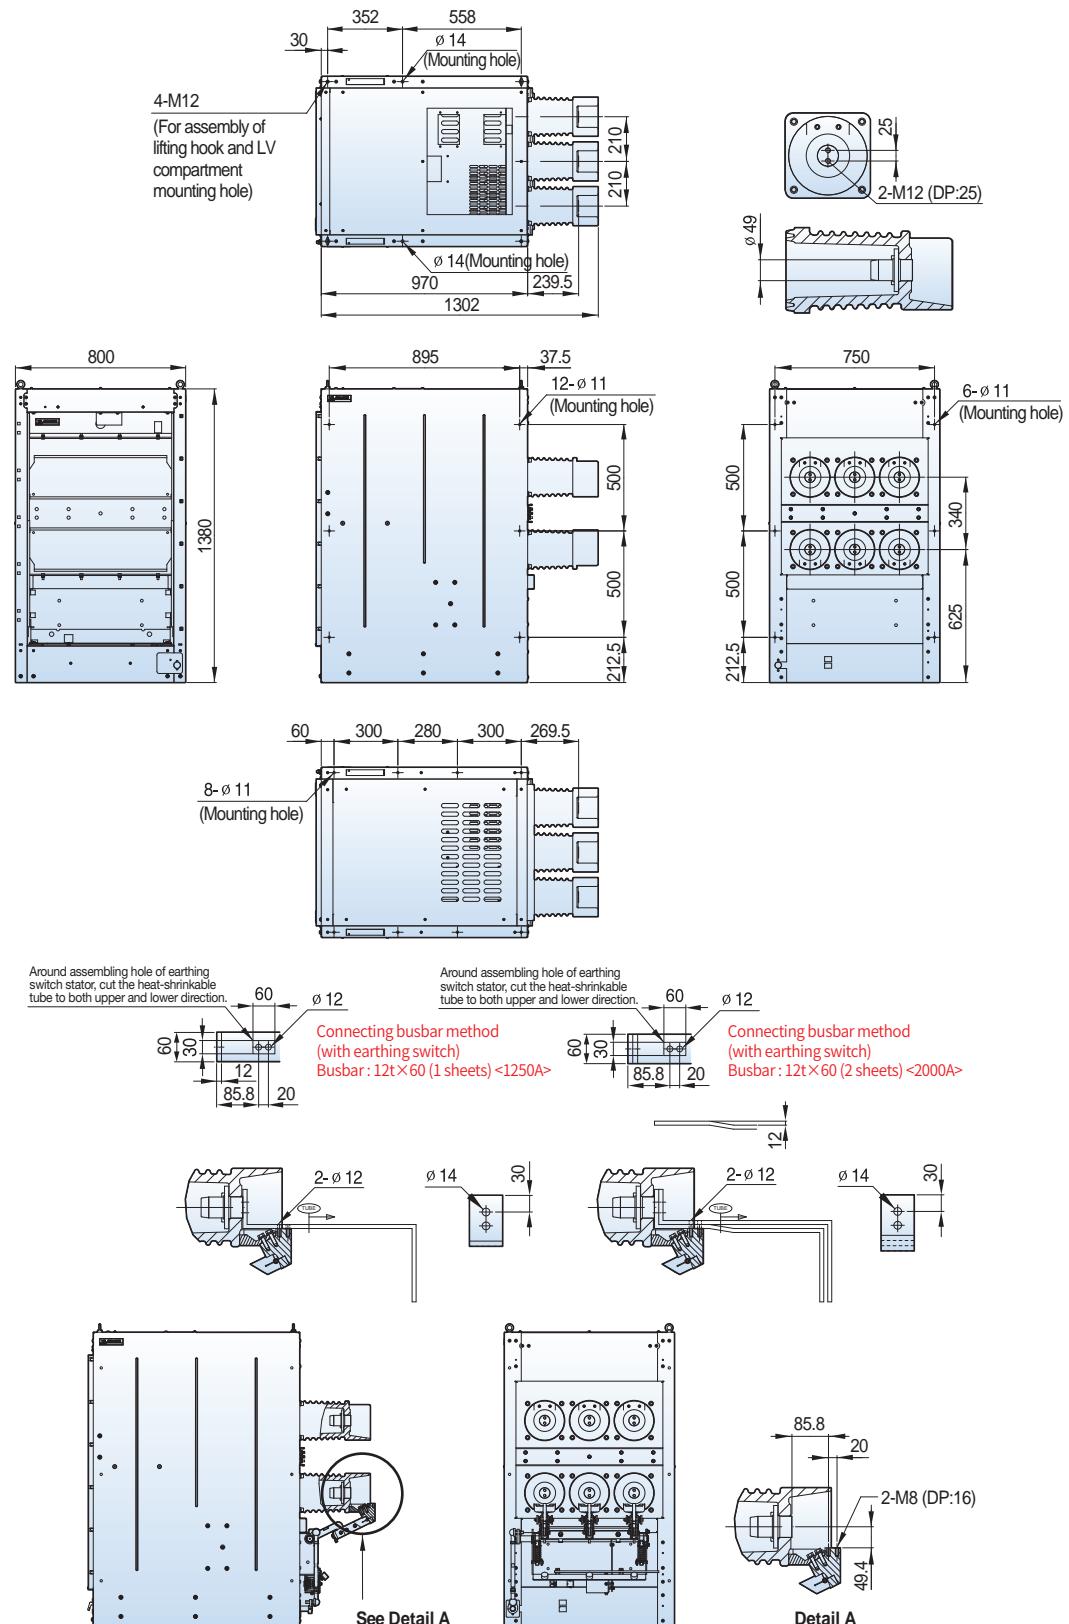
**24kV, 31.5/40kA, 1250/2000A****Withdrawable****H cradle, phase distance 210mm**



# Dimensions - VH type (VH-06/12/17/20/25/36)

**24kV, 31.5/40kA, 1250/2000A**

**Withdrawable**

■ H cradle, Rotated bushing type, phase distance 210mm

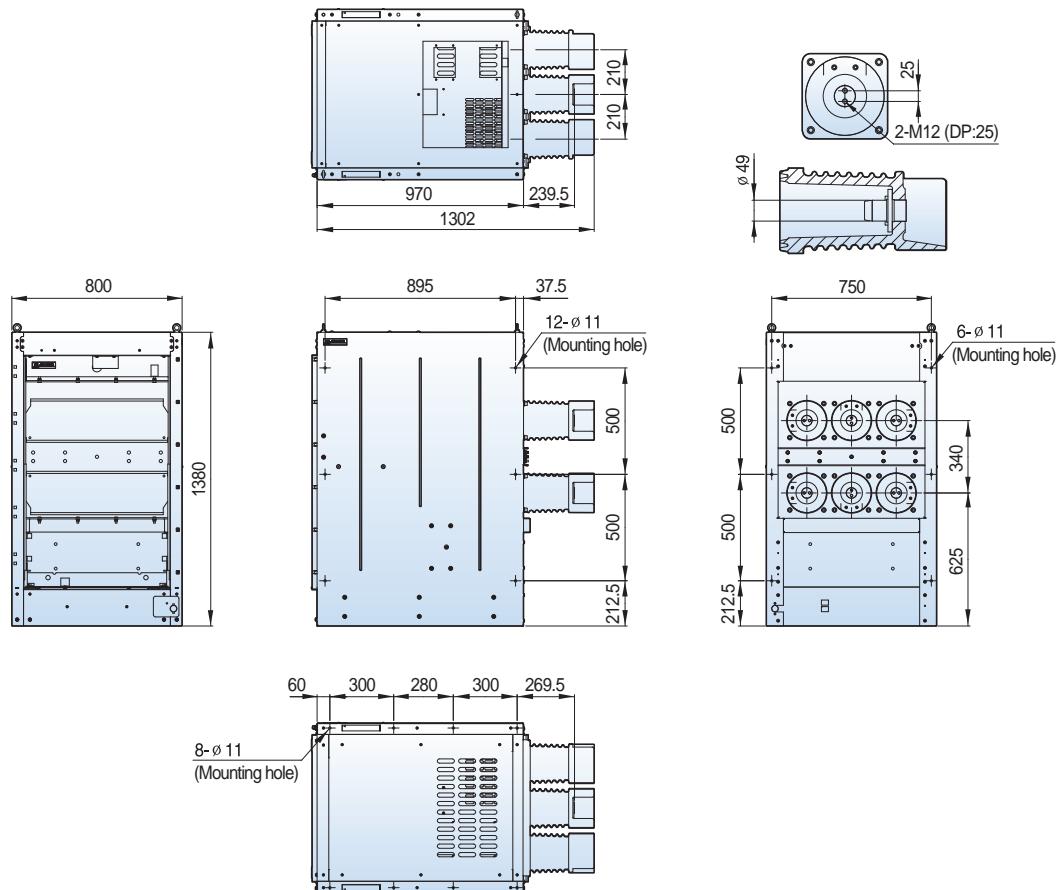

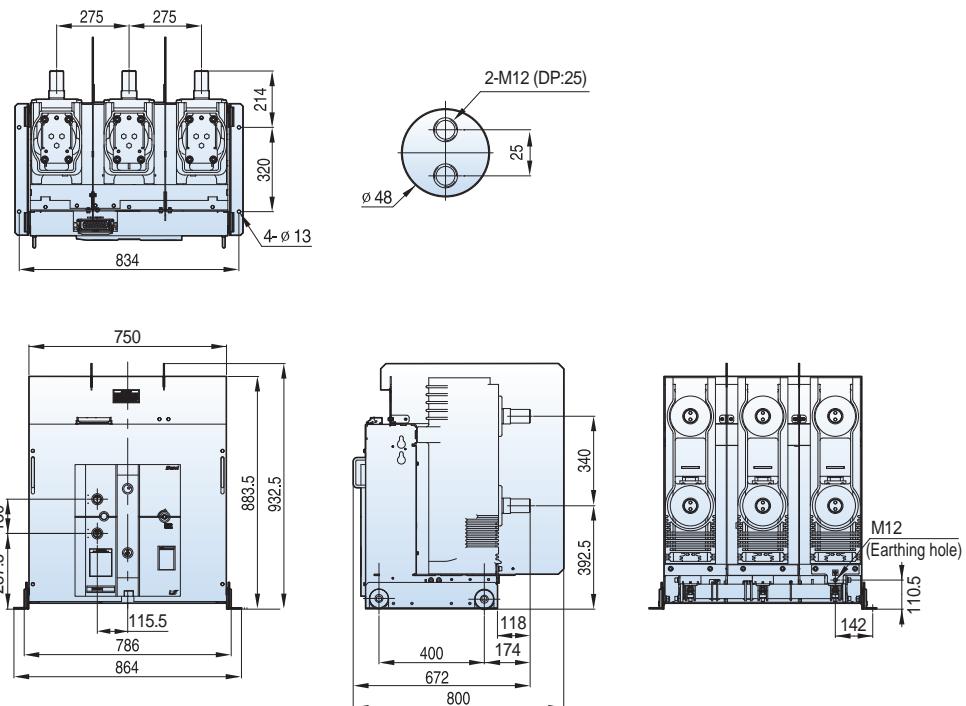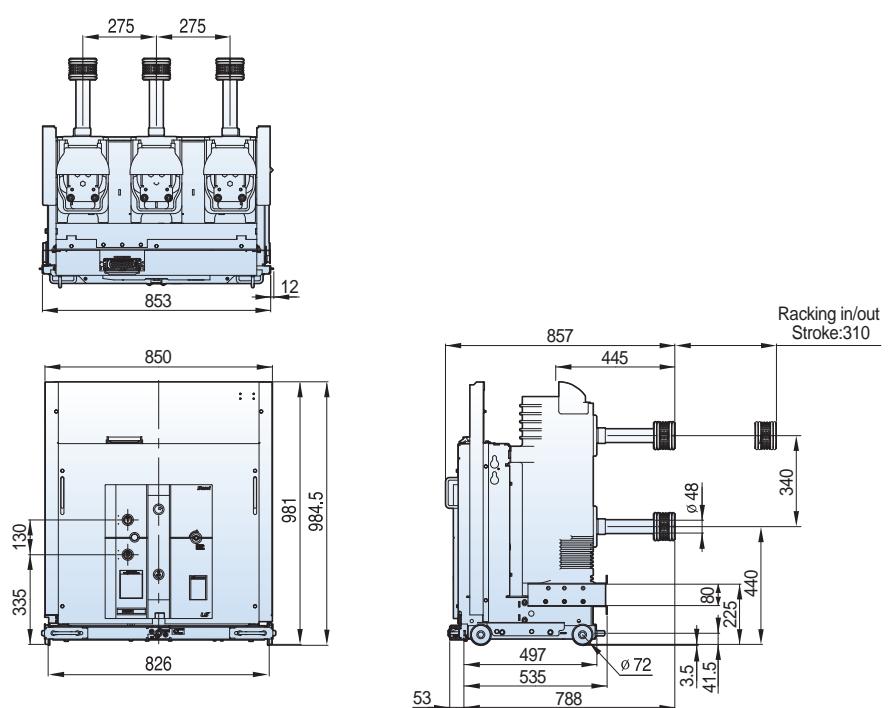
**24kV, 31.5/40kA, 1250/2000A****Fixed****■ P type, phase distance 275mm****Withdrawable****■ H type unit, phase distance 275mm**

# Dimensions - VH type (VH-06/12/17/20/25/36)

**24kV, 31.5/40kA, 1250/2000A**

**Withdrawable**


■ H cradle, phase distance 275mm

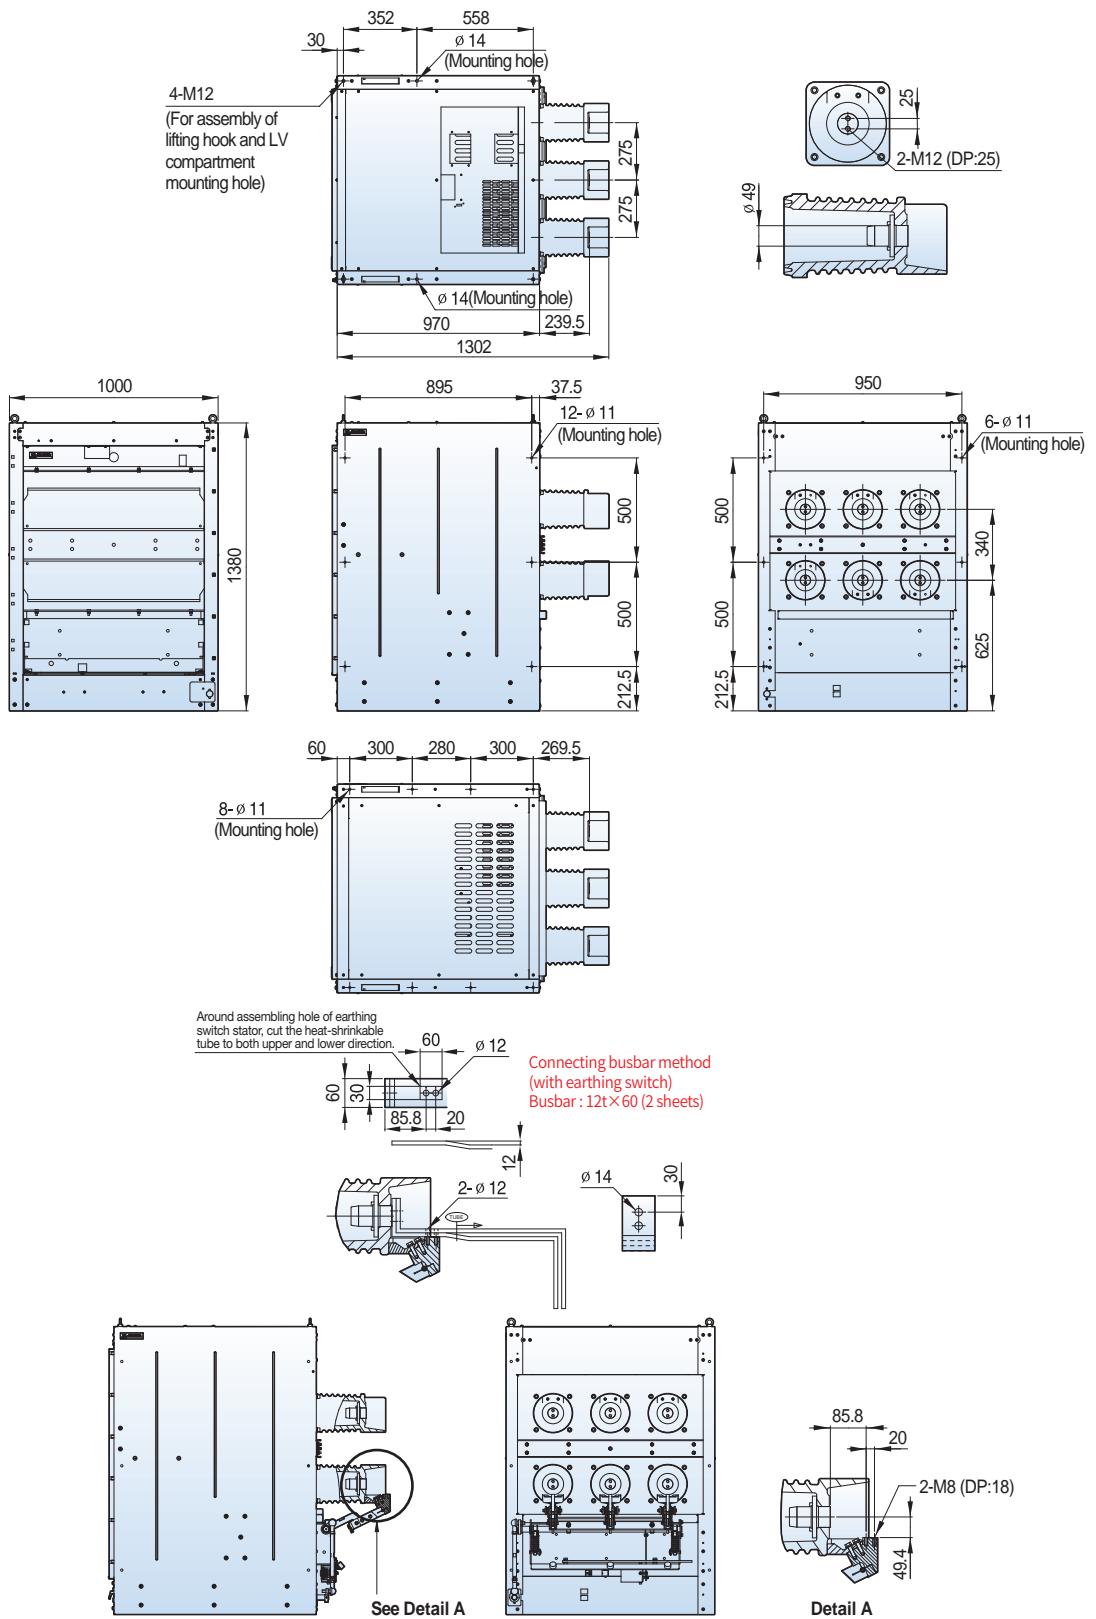

## 24kV, 31.5/40kA, 3150A


### Fixed

#### ■ P type, phase distance 275mm

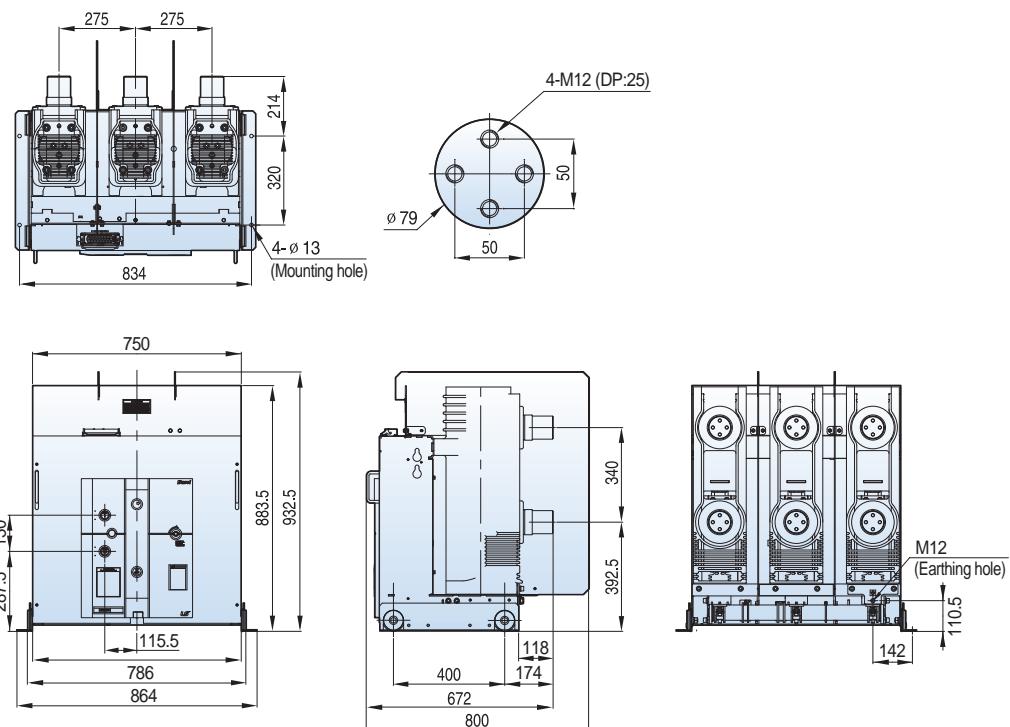

### Withdrawable

#### ■ H type unit, phase distance 275mm

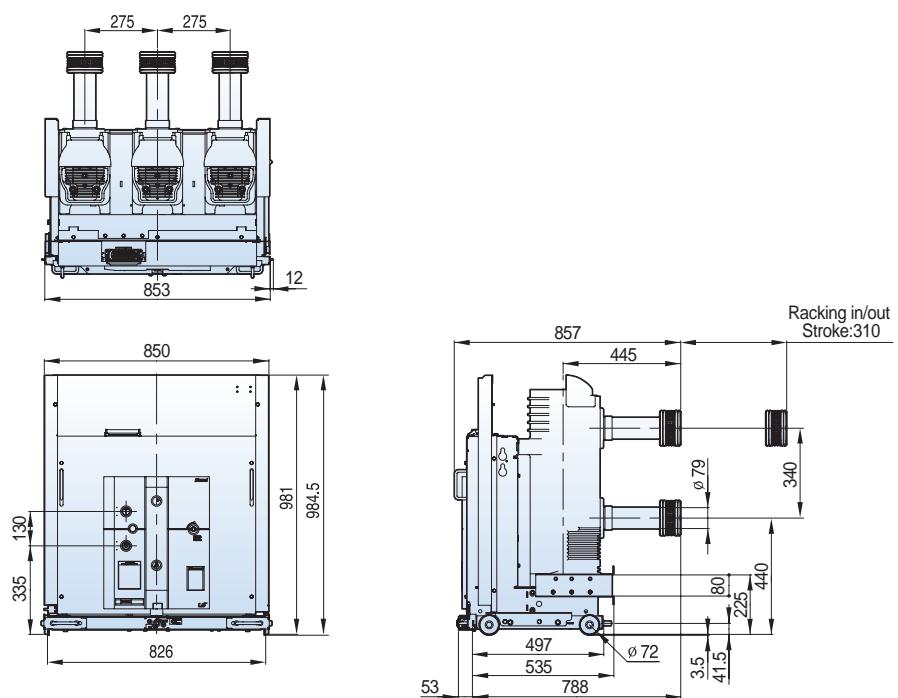


# Dimensions - VH type (VH-06/12/17/20/25/36)

**24kV, 31.5/40kA, 3150A**

**Withdrawable**


**■ H cradle, phase distance 275mm**

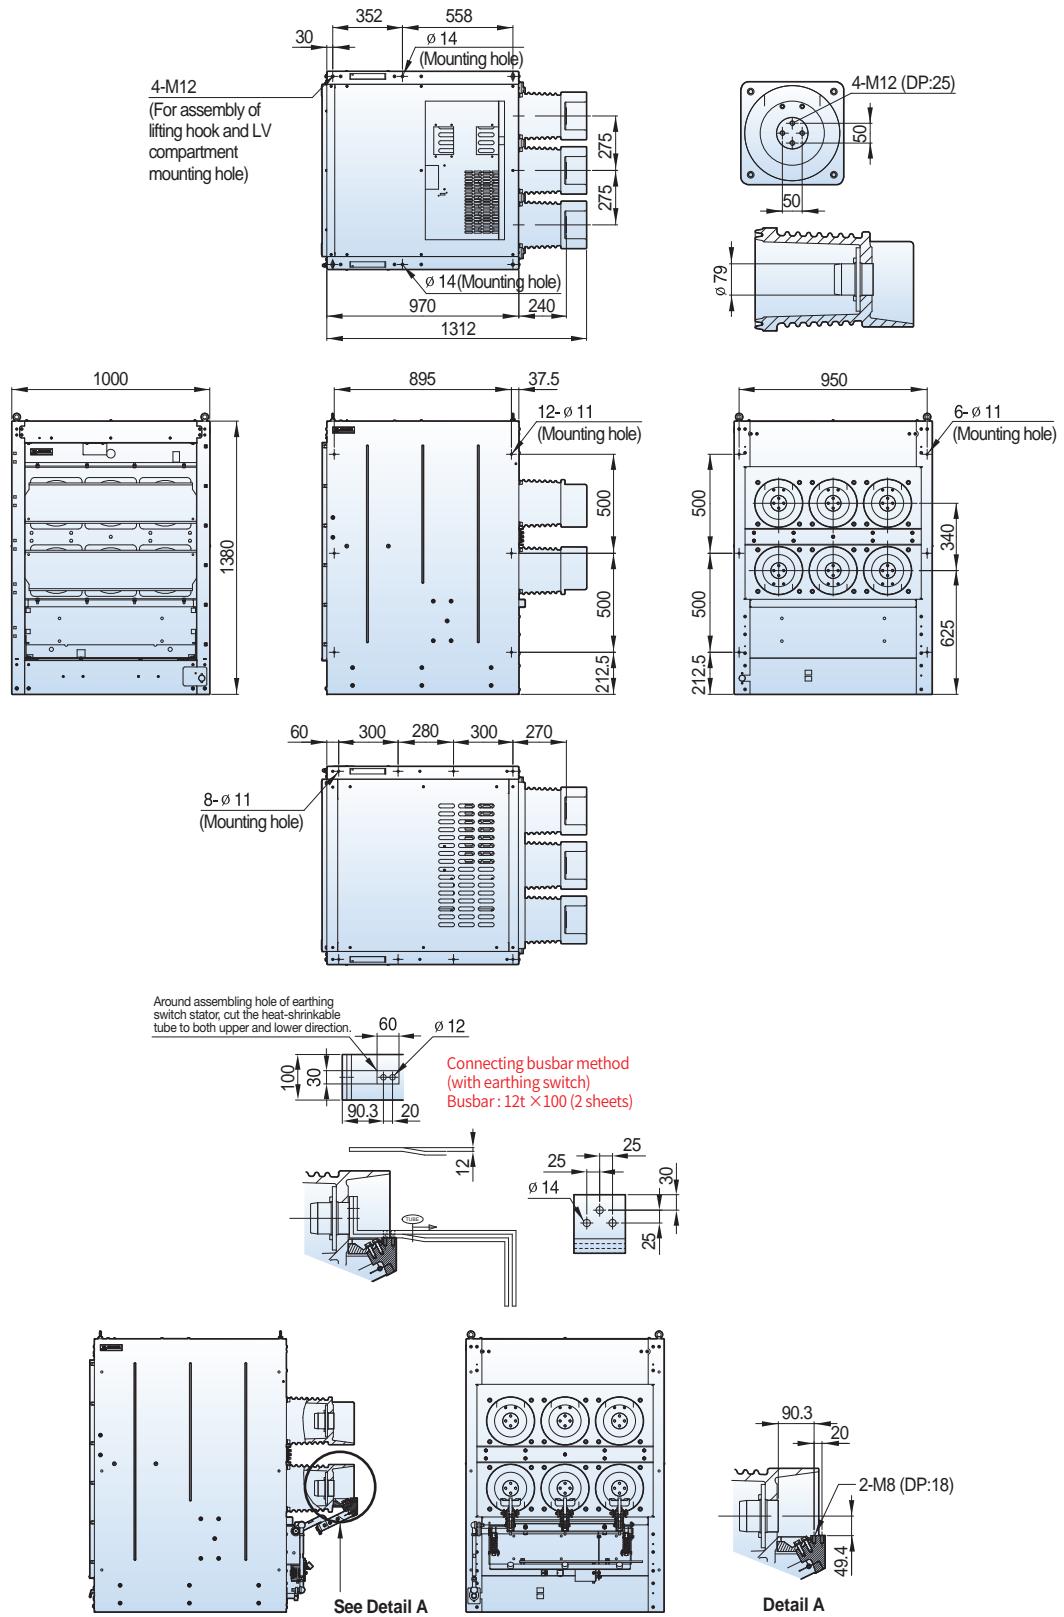

## 36kV, 25/31.5/40kA, 1250/2000A


### Fixed

#### ■ P type, phase distance 300mm

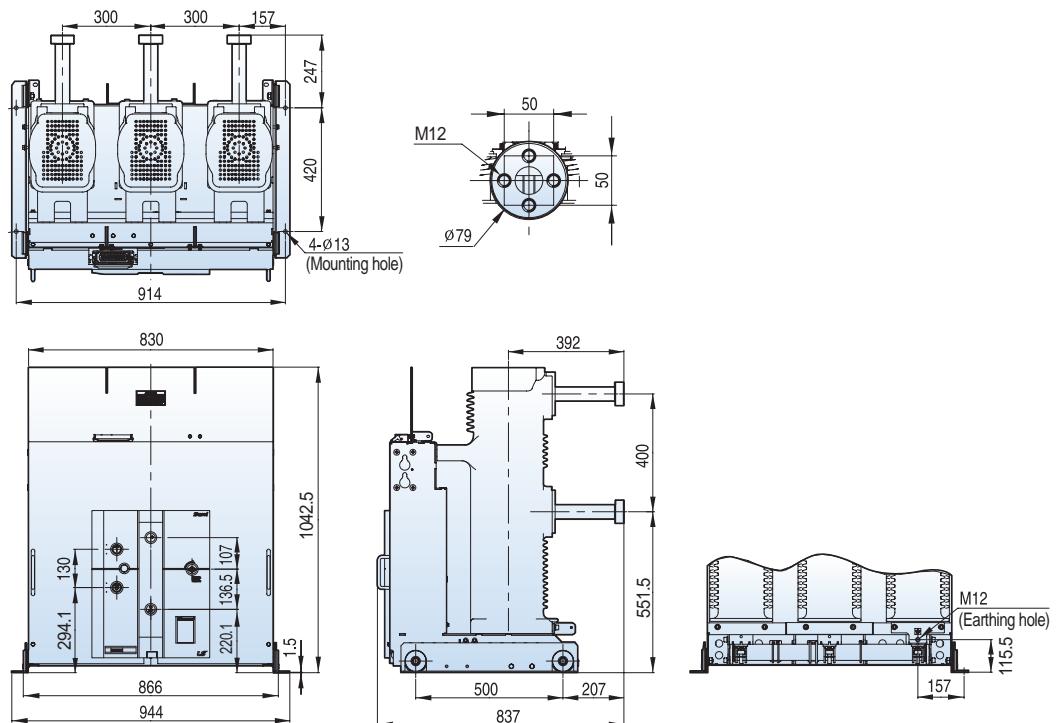

### Withdrawable

#### ■ H type unit, phase distance 300mm

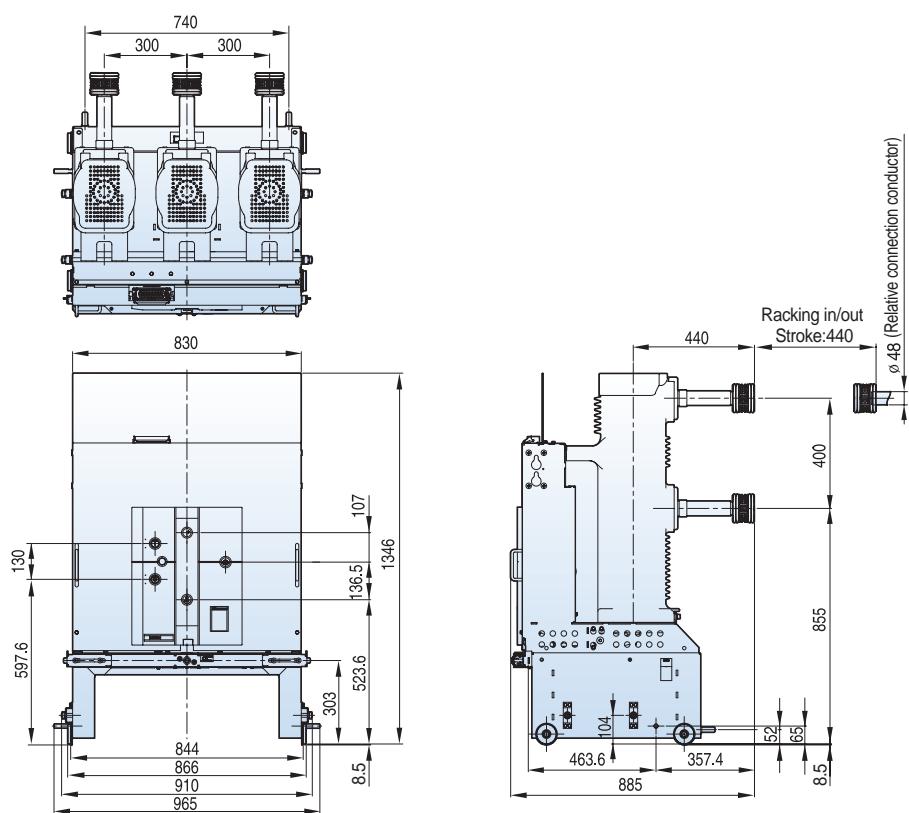




# Dimensions - VH type (VH-06/12/17/20/25/36)

**36kV, 25/31.5/40kA, 1250/2000A**

**Withdrawable**

■ H type cradle, phase distance 300mm

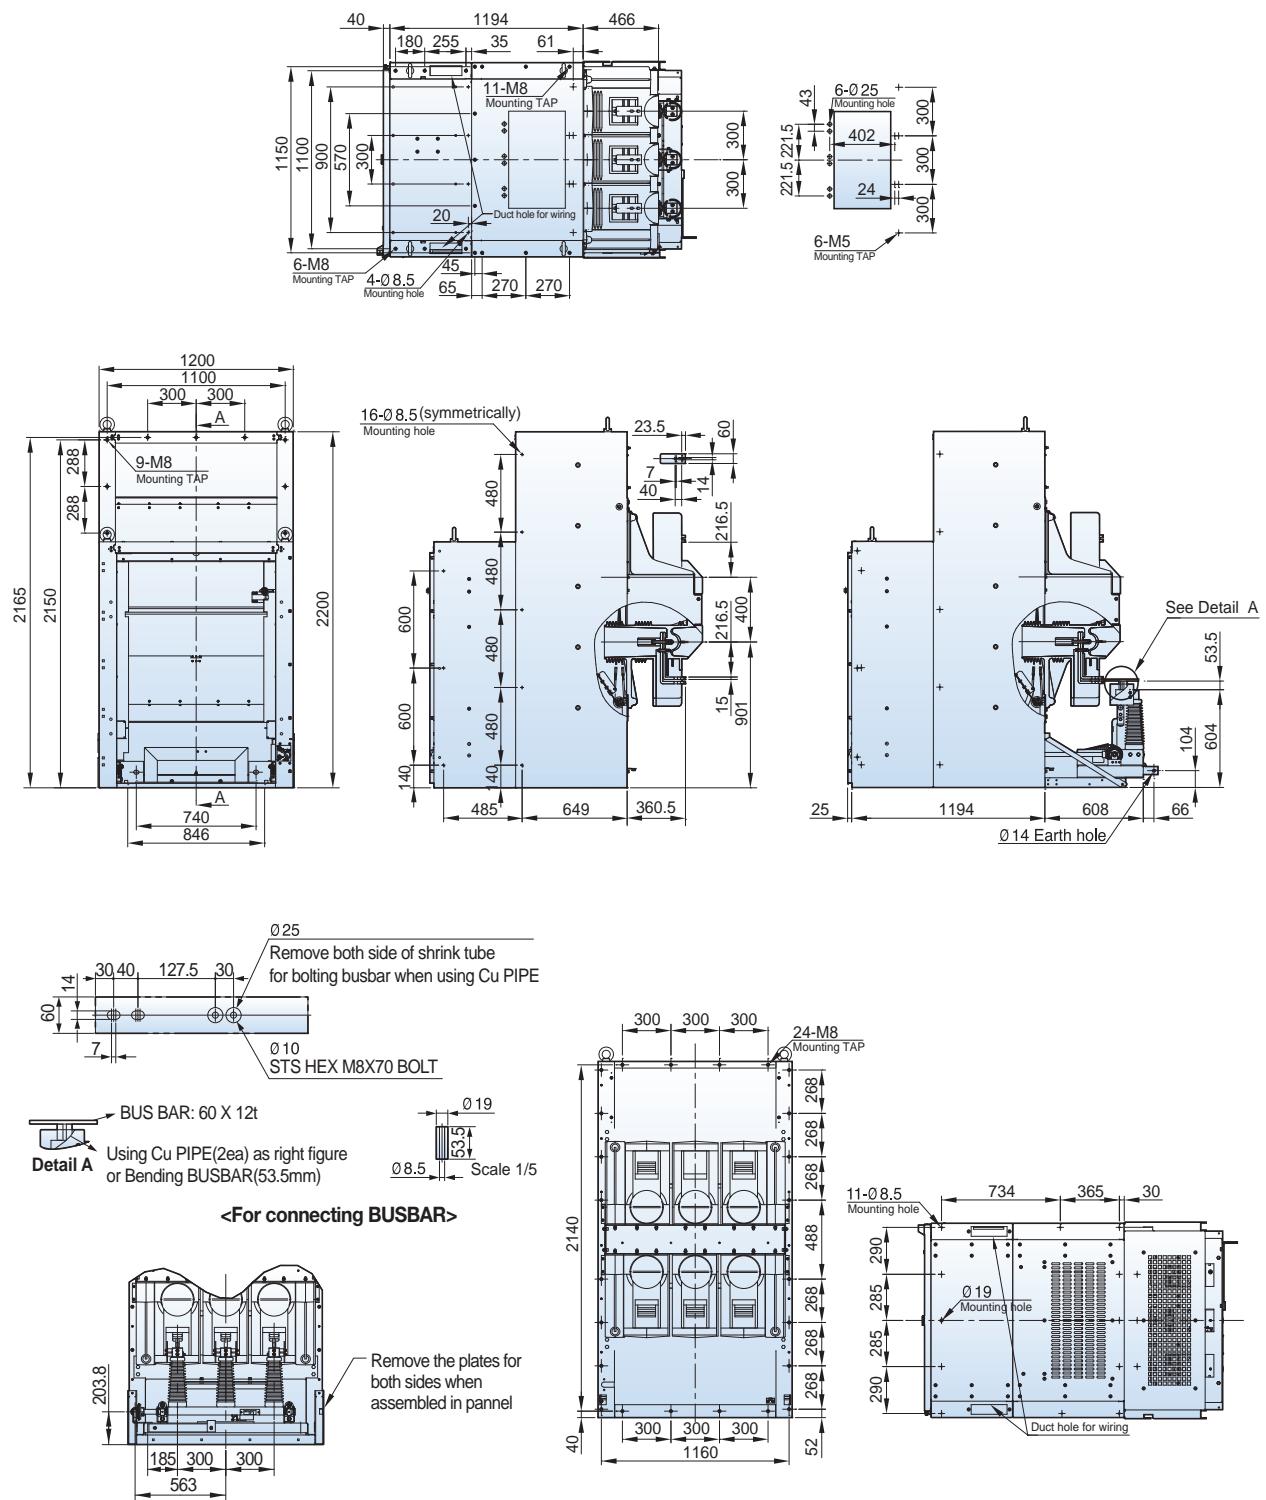

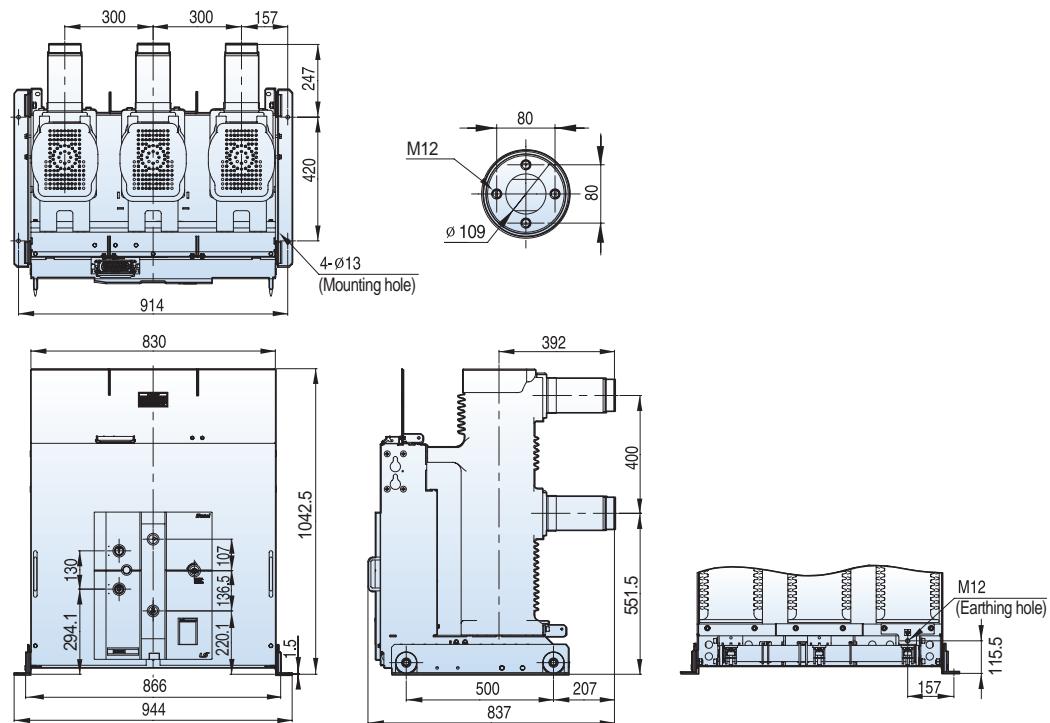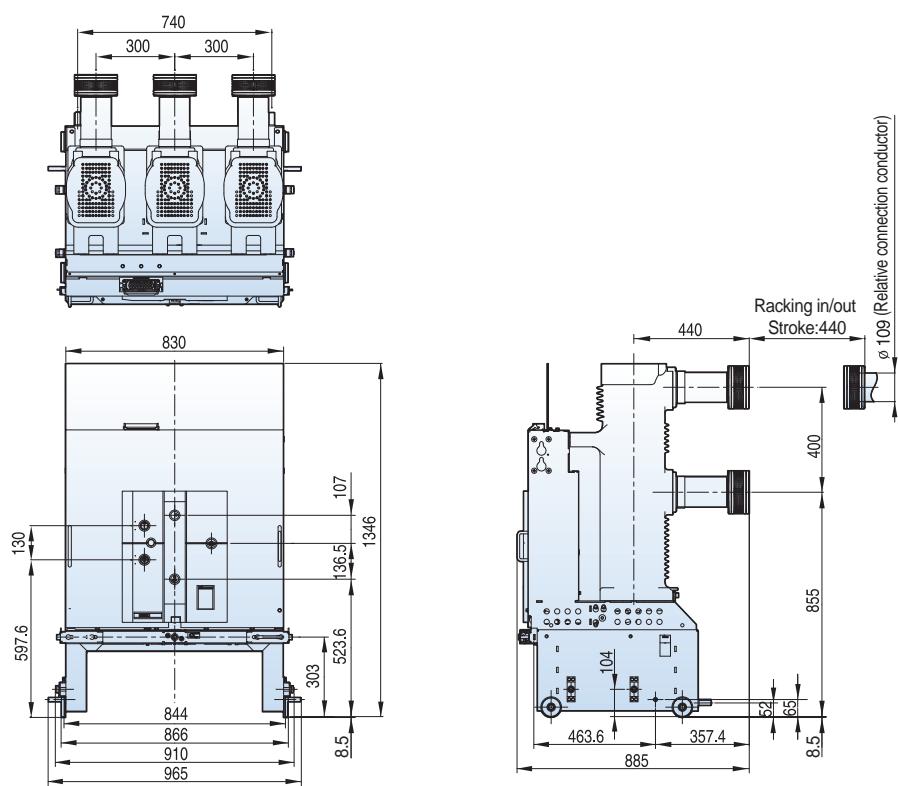
**36kV, 25/31.5/40kA, 3150A****Fixed****■ P type, phase distance 300mm****Withdrawable****■ H type unit, phase distance 300mm**

# Dimensions - VH type (VH-06/12/17/20/25/36)

## 36kV, 25/31.5/40kA, 3150A

**Withdrawable**

■ H type cradle, phase distance 300mm

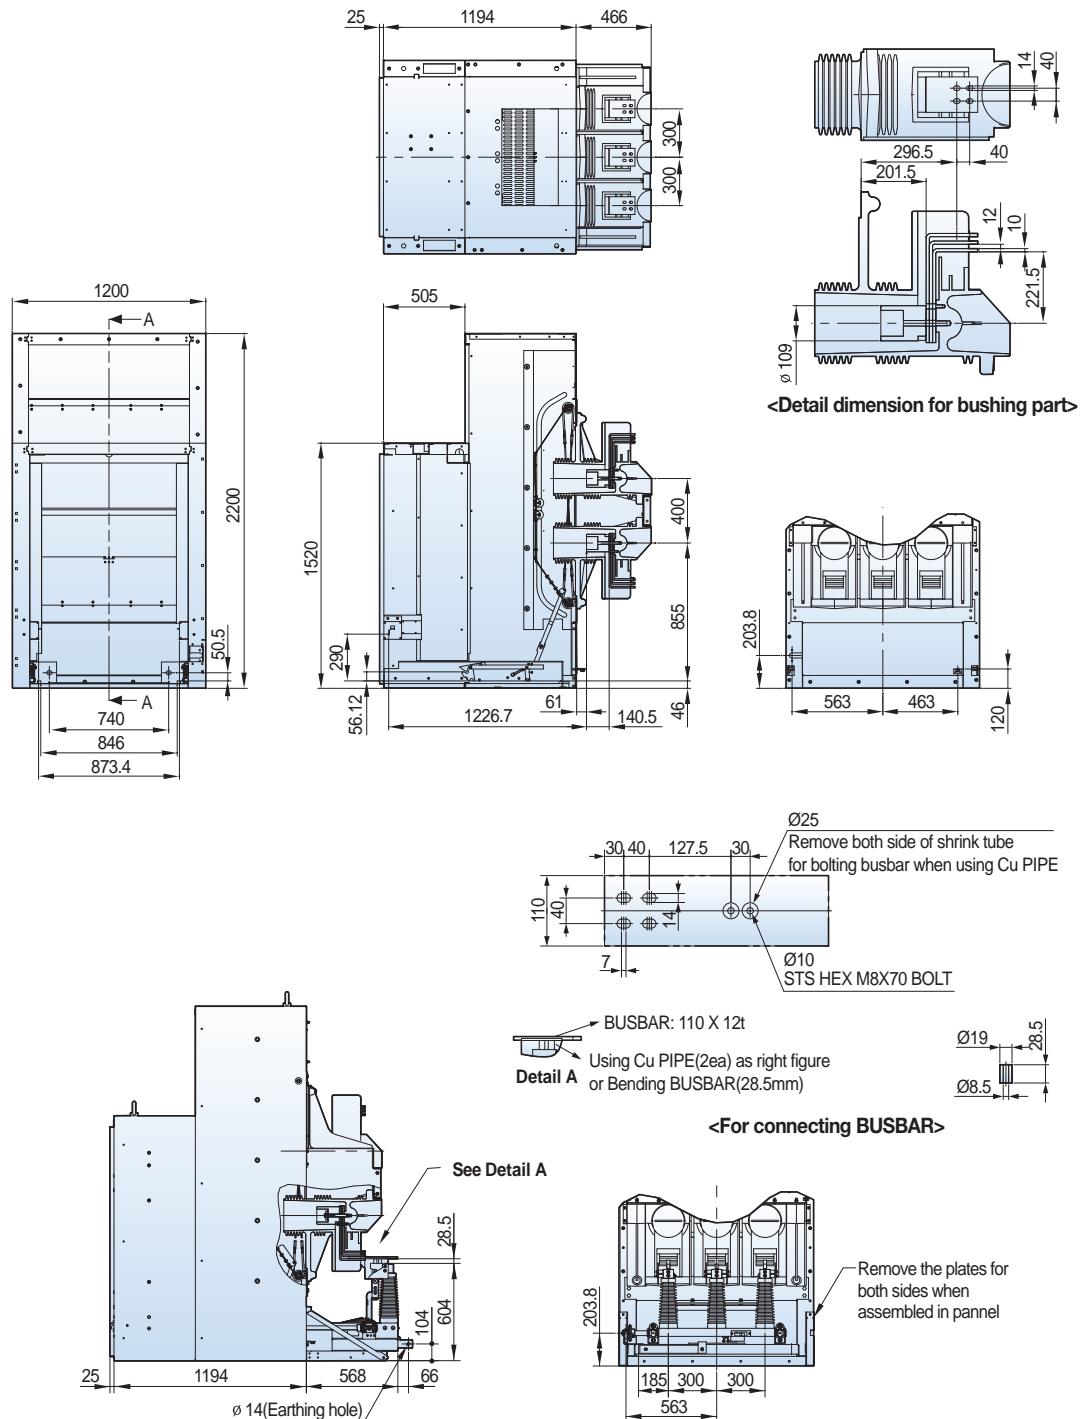


\* Mounting information is same as 36kV 25/31.5/40kA 1250/2000A

# Side-Mount type VCB

Susol VCB

**25.8kV 16kA 630A**

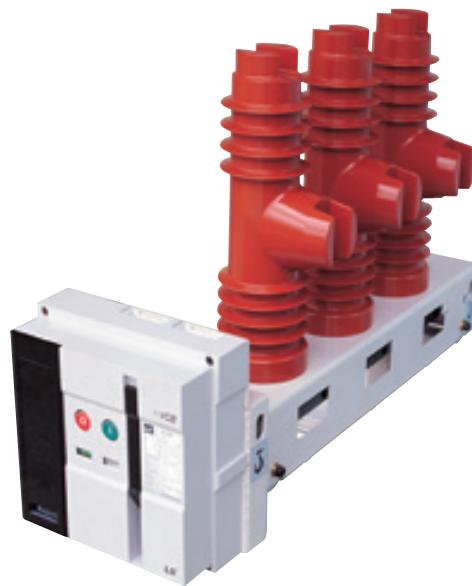


Item		VL-25□16B 06	
Rated voltage	Ur (kV)	25.8	
Rated normal current	Ir (A)	630	
Rated frequency	fr (Hz)	50/60	
Rated short-circuit breaking current	Isc (kA)	16	
Rated short-time withstand current (3 sec)	Ik (kA)	16	
Rated short-circuit breaking capacity	(MVA)	665/715	
Rated short-circuit making current	Ip (kA)	40/41.6	
Rated breaking time	(cycle)	3	
Rated withstand voltage	Power frequency (1 min)	Ud (kV)	60
	Impulse ( $1.2 \times 50\mu s$ )	Up (kV)	125
Rated operating sequence		O-0.3s-CO-3min-CO	
Control voltage	Closing coil (V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 200~250V	
	Trip coil (V)	DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V, AC 48V, AC 100~130V, AC 200~250V	
Auxiliary contact		5 3,5 P	
Rated opening time	(sec)	$\leq 0.04$	
No-load closing time	(sec)	$\leq 0.06$	
Type test class	Mechanical	M1	
	Electrical	E1	
	Capacitive current switching	C1	
Lifetime *	Mechanical (time)	2,000	
	Electrical (time)	2,000	
Installation	Fixed Right	R type	
	Left	L type	
Pole centre distance	(mm)	210	
Weight	CB (kg)	95	
Стандарты		IEC 62271-100	


\* Lifetime with maintenance

# Side-Mount type VCB

## Control circuit diagram

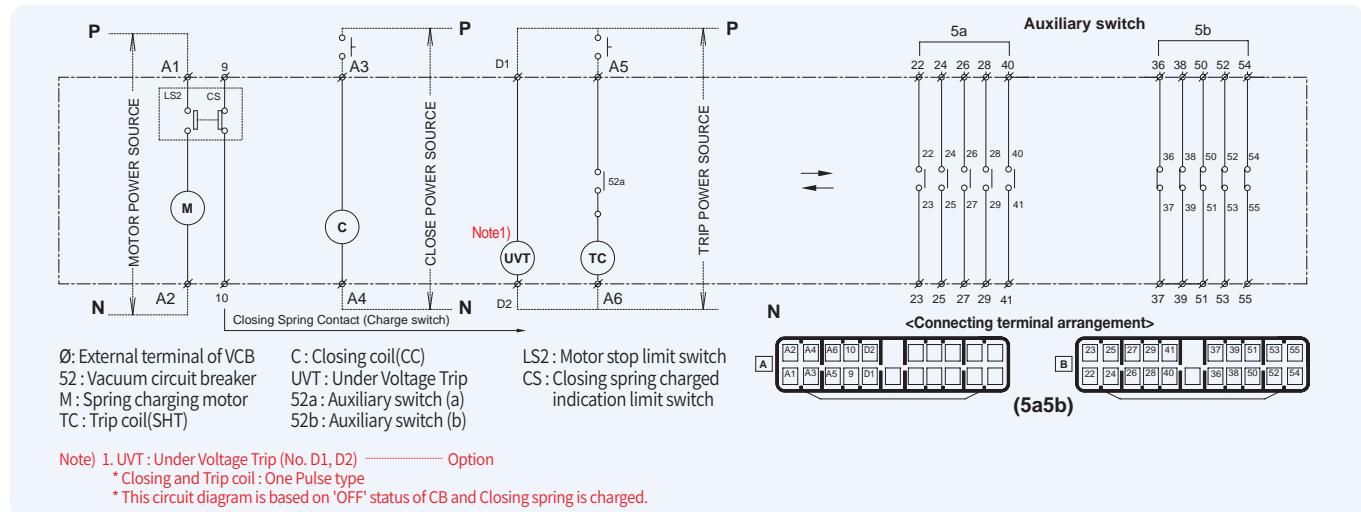

## Dimension

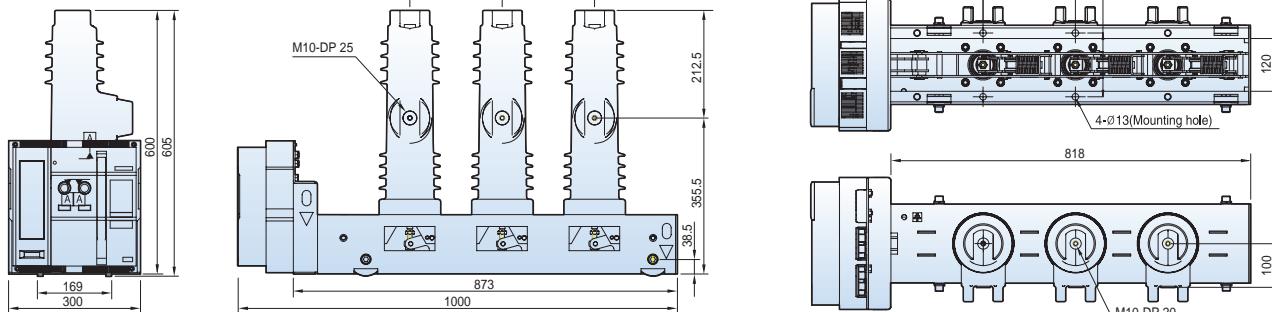


Note) This external shape is based on "R" Type (Installation type)

## Ordering information

<b>VL</b>	—	<b>25</b>	<b>R</b>	<b>16</b>	<b>B</b>	<b>06</b>
Basic model name e-VCB	—	Rated voltage (kV) 25	Installation type R On the right (Fixed type)	Breaking 16	Phase distance/Compatibility B 210mm	Rated current (A) 06 680


VL-25□16B06	—	M1	C1	T1	SA5	UVT	Other accessories
Motor control voltage	Closing coil voltage	Trip coil voltage	Aux. contact & wire ass'y				
M0 Without Motor	C0 Without Closing coil	T0 Without Trip coil	SA5 A type connector, 5a5b				
M1 DC 110V	C1 DC 110V	T1 DC 110V				U0 Without UVT	AA Lead Wire
M2 DC 220V	C2 DC 220V	T2 DC 220V				U1 DC 110V	AB User Plug(Part)
M3 DC 125V	C3 DC 125V	T3 DC 125V				U2 DC 220V	
M4 DC 24V~30V	C4 DC 24V~30V	T4 DC 24V~30V				U3 DC 125V	
M5 DC 48V~60V	C5 DC 48V~60V	T5 DC 48V~60V				U4 DC 24V~30V	
M6 AC 48V	C6 AC 48V	T6 AC 48V				U5 DC 48V~60V	
M7 AC 100V~130V	C7 AC 100V~130V	T7 AC 100V~130V				U6 AC 48V	
M8 AC 200V~250V	C8 AC 200V~250V	T8 AC 200V~250V				U7 AC 100V~130V	
						U8 AC 200V~250V	

## Electrical endurance by interrupting current

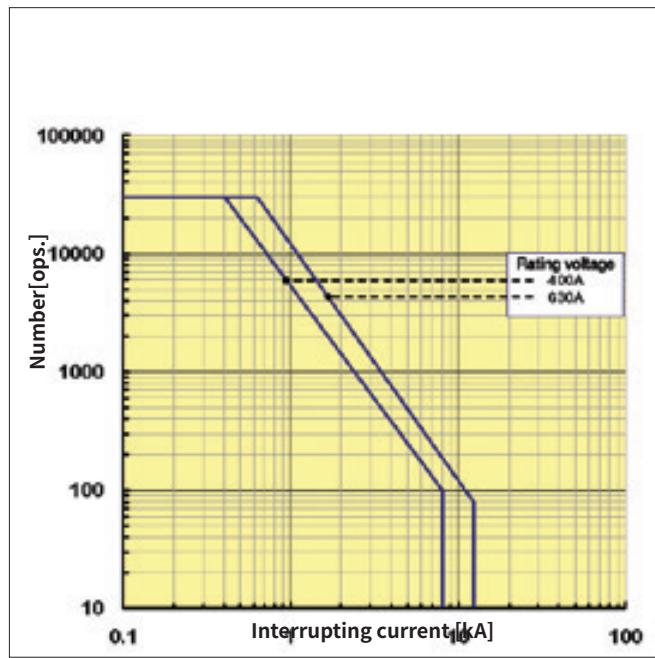


VI model LV2 at 7.2kV

- N : Operation numbers
- I : Interrupting current

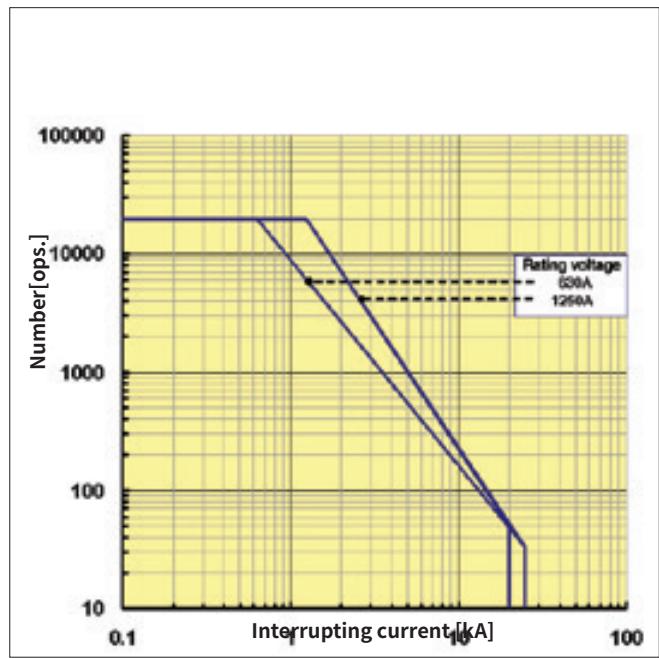


VI model LV3 at 7.2kV

- N : Operation numbers
- I : Interrupting current

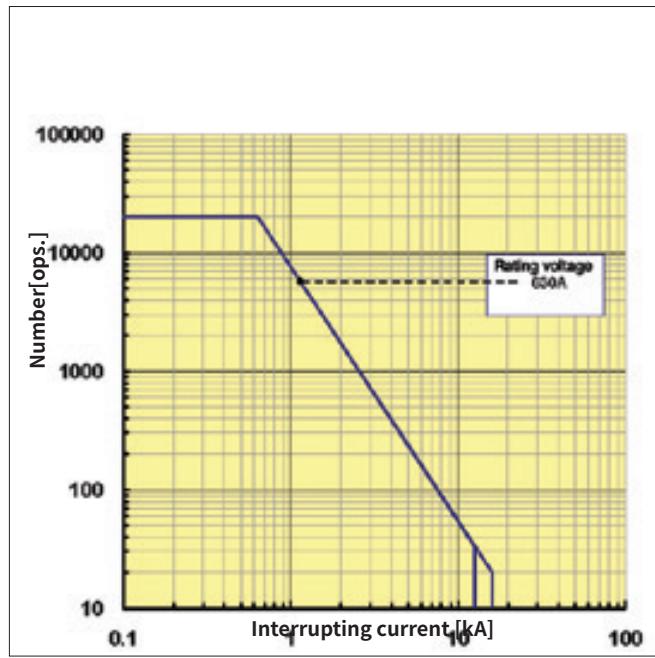

VI model LV4 at 24kV

- N : Operation numbers
- I : Interrupting current



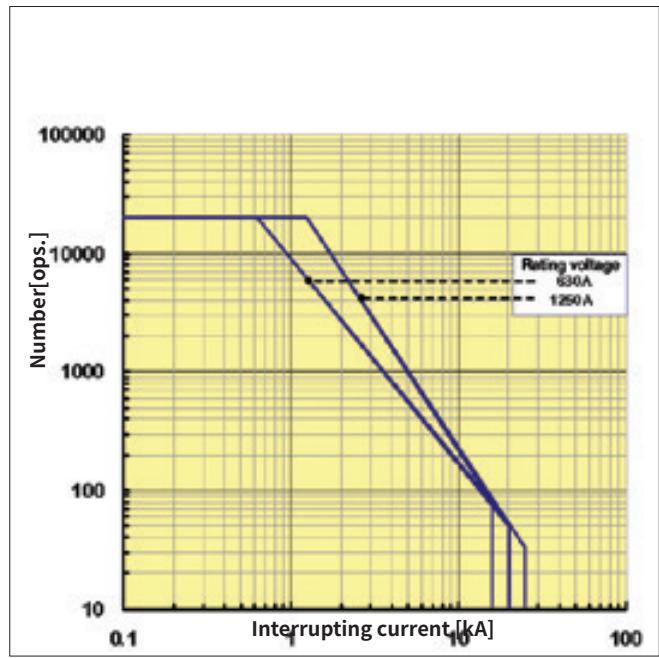


VI model LV5 at 17.5kV

- N : Operation numbers
- I : Interrupting current

# Technical data

## Electrical endurance by interrupting current

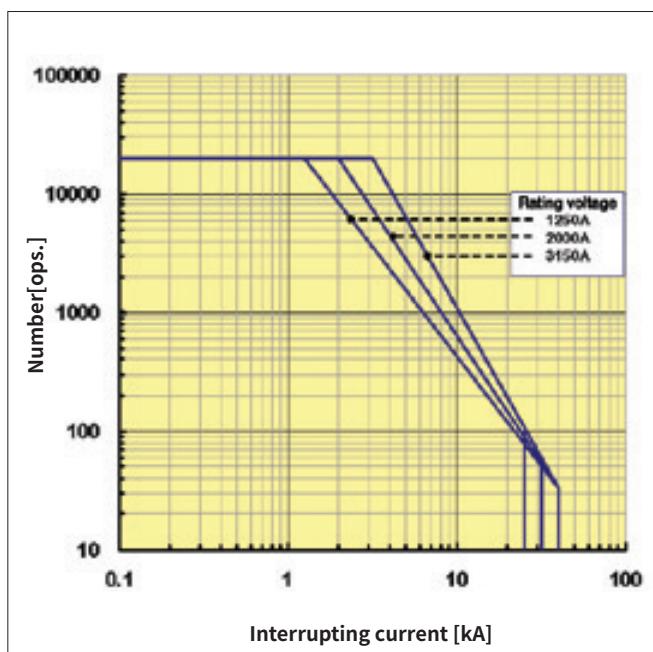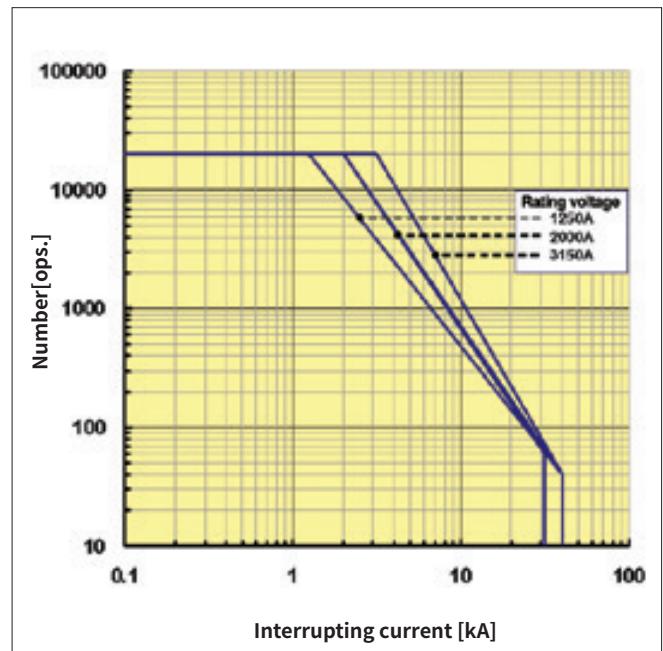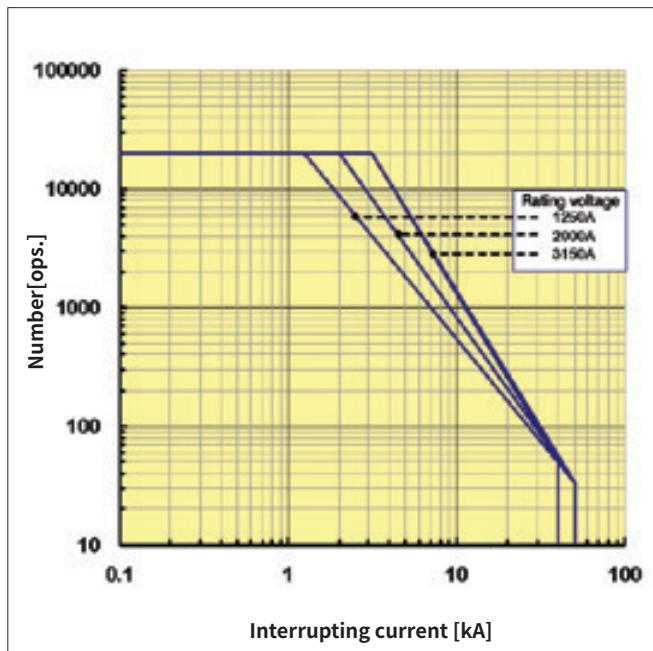

Note) 1. Above graphs represent the characteristics of the electrical life of LS Susol VCB.  
2. Life characteristics of each model in each rating represents the LOG-LOG graphs.

## Standard Use Environment for Susol VCB

The operation characteristic of Vacuum Circuit Breaker such as insulation and endurance is often influenced largely by external environment and thus should be applied appropriately with conditions of the place where it is used taken into consideration.

The following values are the limits have been set in accordance with IEC 62271-100 (IEC 62271-1)

### Ambient Temperature

- maximum temperature: +40°C
- 24-hour average maximum temperature: +35°C
- minimum temperature: -5°C

### Altitude

- 1000m or less above sea level

### Relative Humidity

- 24 hours average value: 95% or less
- One month average: 90% or less



- If a standard circuit breaker is used in high temperature exceeding 40°C, you are advised to use it according to the current corrected for each level of ambient temperature in catalog.
- If used in conditions of high humidity, the dielectric strength or electric performance may be degraded.



- It is highly recommended to use a dust cover or anti-humid agent if it is used in dusty and humid conditions.
- Excessive vibration may cause a trip breaker such as connection fault or flaw on mechanical parts.



- If it is left ON or OFF for a long time, it is recommended to switch load current on a regular basis.
- It is recommend to put it in the sealed protection if corrosive gas is prevalent.

# Technical data

## Special Use Environment

The circuit breaker is designed for use in standard use environment specified in Section 2.1 of IEC62271-1. Concerning the special use environments as below the special use conditions are required to be considered, thus please contact us in advance.

- where altitude and ambient temperature are out of standard use environment.(-40°C)
- where a strong sea breeze blows
- when usually used in a humid place
- where a lot of steam or oil steam exists
- where explosive, flammable and other harmful gases might permeate the breaker
- In a dusty place
- where abnormal vibration or shock exists
- where a lot of ice and snow exist
- other special conditions

### Withstand voltage compensation according to altitude


If the breaker is used in areas of sea level higher than 1000m the degradation of insulation performance should be taken into consideration.

70	36	170
50(65)	24	125
38	17.5	95
28(42)	12	75(82)
20	7.2	60
Ud [kV/1min]	Ur[kV]	Up [kV/1.2 × 50μs]


Power Frequency  
Withstand Voltage    Impulse Withstand Voltage

<Table 1> Criteria of withstand voltages by rated voltages specified in IEC62271-1

## Withstand voltage compensation according to altitude

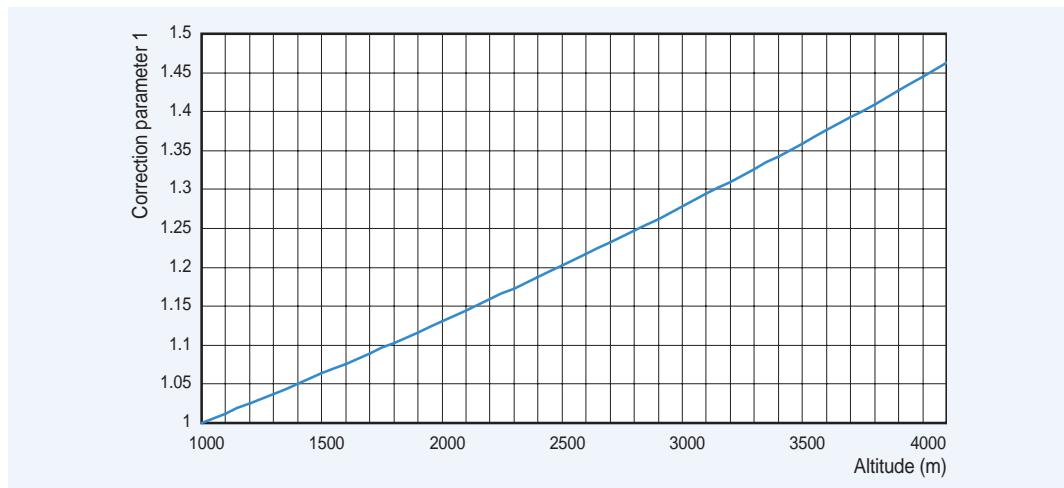

<Fig.1> withstand voltage correction parameter 1 by altitude (based on a required withstand voltage)

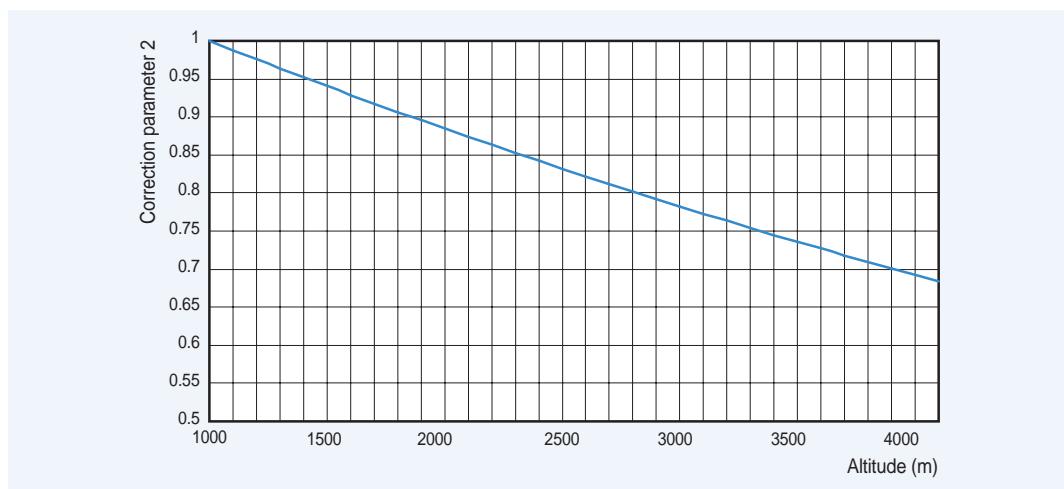

<Fig.2> withstand voltage correction parameter 2 by altitude (based on a applicable withstand voltage)

### Ex) Selecting a breaker to be used in a place of 2500m above sea level with a rated voltage 7.2kV (correction parameter 1 applied)

- Correction parameter at 2500m is 1.2
- Criteria of withstand voltage by rated voltage:  
Power Frequency Withstand Voltage ( $U_d$ ) = 20kV, Impulse Withstand Voltage ( $U_p$ ) = 60kV
- Requirements withstand voltage criteria:  
Power Frequency Withstand Voltage ( $U_d$ ) =  $20 \times 1.2 = 24$ kV, Impulse Withstand Voltage ( $U_p$ ) = 72kV  
Therefore rated voltage 12kV breaker shall apply to satisfy the required withstand voltage.

### Ex) To apply a breaker with a rated voltage 12kV to the place of 2,500m above sea level (correction parameter 2 applied)

- Correction parameter at 2500m is 0.825
- Dielectric strength of VCB : Power Frequency Withstand Voltage ( $U_d$ ) =  $28 \times 0.825 = 23.1$ kV,  
Impulse Withstand Voltage ( $U_p$ ) =  $75 \times 0.825 = 62$ kV/ $1.2 \times 50 \mu s$   
Therefore above breaker with rated voltage 12kV shall apply to rated voltage system 7.2kV at the altitude.

# Technical data

## Special Use Environment

### Rated current compensation in accordance with ambient temperature

When normal ambient temperature exceeds the temperature specified in the environment the following formula help to select the applicable current.

$$I_a = I_r \left( (\Theta_{max} - \Theta_a) / \Theta_r \right)^{1/2}$$

$I_a$ : allowable continuous current in the actual ambient temperature  $\Theta_a$

$I_r$ : rated current at 40°C ambient temperature

$\Theta_{max}$ : acceptable overall temperature of the hottest spot

$\Theta_a$ : the actual ambient temperature expected at -30°C and 60°C

$\Theta_r$ : allowable temperature in the hottest place at rated current


Ex) The calculation of the applicable load current value when a breaker with rated current

2000A is used at 55 °C ambient temperature

$$I_a = 2000 \times ((105-55)/65)^{1/2} = 2000 \times 0.87 = 1754A$$

Rated current (A)	Ambient temperature (°C)								
	20	25	30	35	40	45	50	55	60
4000	4000	4000	4000	4000	4000	3843	3679	3508	3328
3150	3150	3150	3150	3150	3150	3026	2898	2763	2621
2000	2000	2000	2000	2000	2000	1922	1840	1754	1664
1250	1250	1250	1250	1250	1250	1201	1150	1096	1040
630	630	630	630	630	630	605	580	553	524

<Table 2> Allowable load current by ambient temperature

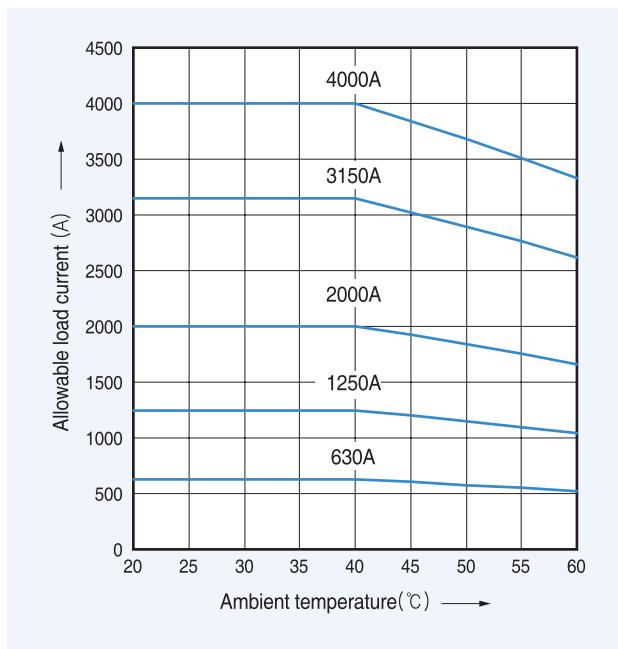

<Figure 3> Allowable load current by ambient temperature

## Comparison of GCB & VCB

In the system of medium voltage lines VCB uses a vacuum which is an eco friendly medium for arc extinguishing. It also offers excellent interrupting properties and ease of maintenance and has expanded the area to the scope of the GCB as the overlap increases.

Items	GCB	VCB	Comparison results	Remarks
Images				
Arc extinguish medium and characteristics	SF6 gas <ul style="list-style-type: none"> <li>- Greenhouse gas that causes global warming.</li> <li>- The toxic gas generated by chemical reactions due to arc energy.</li> <li>- 5kgf/mm² high pressure required.</li> </ul>	Vacuum <ul style="list-style-type: none"> <li>- Green clean medium.</li> <li>- <math>5 \times 10^{-5}</math> Torr vacuum rate to maintain.</li> </ul>	VCB is better than GCB	
Maintenance of the arc media	<ul style="list-style-type: none"> <li>- Periodic check and supplement the gas pressure required.</li> <li>- Automatic locking if gas pressure In the event of an accident while the gas valve is locked trip is disable and the load equipment can not be protected.</li> </ul>	<ul style="list-style-type: none"> <li>- Available until the product life.</li> <li>- Always keep trip-first feature.</li> </ul> <p>When an accident occurs the trip-first feature functions to protect the equipment.</p>	VCB is better than GCB	
Rated voltage range (kV)	3.6~550	3.6~36	GCB is better than VCB	VCB has been increasing rapidly in the medium voltage systems.
Applicable rate of transient recovery voltage (RRRV)	Low	High	VCB is better than GCB	IEC62271-100 Annex M applied/ Interrupting performance verified.
Development and trends	Decline <ul style="list-style-type: none"> <li>- Company M discontinued producing GCB.</li> <li>- Company A manufactures VCB in medium voltage GCB production factory.</li> <li>- GCB Maker S started the production of VCB.</li> </ul>	Increasing <ul style="list-style-type: none"> <li>- Companies A and S have developed new VCBs.</li> <li>- Development trend that the voltage coverage of VCB expands.</li> <li>- VI increased coverage. (GIS, DAIS, SIS, etc.)</li> </ul>	VCB is better than GCB	

# MEMO

---





#### Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.  
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



• According to The WEEE Directive, please do not discard the device with your household waste.



[www.ls-electric.com](http://www.ls-electric.com)

#### ■ Headquarter

127 LS-ro [Hogye-dong] Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

#### ■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea  
Tel. 82-2-2034-4916, 4684, 4429

#### ■ Overseas Subsidiaries

- LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)  
Tel: 81-3-6268-8241 E-Mail: japan@ls-electric.com
- LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)  
Tel: 86-411-8730-5872 E-Mail: china.dalian@lselectric.com.cn
- LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)  
Tel: 86-510-6851-6666 E-Mail: china.wuxi@lselectric.com.cn
- LS ELECTRIC Vietnam Co., Ltd. (Hanoi, Vietnam)  
Tel: 84-93-631-4099 E-Mail: vietnam@ls-electric.com
- LS ELECTRIC Middle East FZE (Dubai, U.A.E.)  
Tel: 971-4-886-5360 E-Mail: middleeast@ls-electric.com
- LS ELECTRIC Europe B.V. (Hoofddor, Netherlands)  
Tel: 31-20-654-1424 E-Mail: europartner@ls-electric.com
- LS ELECTRIC America Inc. (Chicago, USA)  
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com
- LS ENERGY SOLUTIONS LLC (Charlotte, USA)  
Tel: 1-704-587-4051 E-Mail: cmfeldman@ls-es.com
- LS ELECTRIC Turkey Co., Ltd. (Istanbul, Turkey)  
Tel: 90-212-806-1252 E-Mail: turkey@ls-electric.com

#### ■ Overseas Branches

- LS ELECTRIC Tokyo Office (Japan)  
Tel: 81-3-6268-8241 E-Mail: tokyo@ls-electric.com
- LS ELECTRIC Beijing Office (China)  
Tel: 86-10-5095-1631 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Shanghai Office (China)  
Tel: 86-21-5237-9977 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Guangzhou Office (China)  
Tel: 86-20-3818-2883 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Chengdu Office (China)  
Tel: 86-28-8670-3201 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Qingdao Office (China)  
Tel: 86-532-8501-2065 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Nanjing Office (China)  
Tel: 86-25-8467-0005 E-Mail: china@lselectric.com.cn
- LS ELECTRIC Bangkok Office (Thailand)  
Tel: 66-90-950-9683 E-Mail: thailand@ls-electric.com
- LS ELECTRIC Jakarta Office (Indonesia)  
Tel: 62-21-2933-7614 E-Mail: indonesia@ls-electric.com
- LS ELECTRIC Moscow Office (Russia)  
Tel: 7-499-682-6130 E-Mail: info@lselectric-ru.com
- LS ELECTRIC America Western Office (Irvine, USA)  
Tel: 1-949-333-3140 E-Mail: america@ls-electric.com
- LS ELECTRIC India Office (India)  
Tel: 91-80-6142-9108 E-Mail: Info\_india@ls-electric.com
- LS ELECTRIC Singapore Office (Singapore)  
Tel: 65-6958-8162 E-Mail: singapore@ls-electric.com



#### Technical Question or After-sales Service

Customer Center-Quick Responsive  
Service, Excellent technical support

**82-1644-5481**